

Notes:



- * Material:
Insulator: Nylon 6T With 30% GF.
UL 94V-0 Color Black
Square Pin: Brass
- △* Pin overall Length 20.0mm Max.

Ordering Code:

CH02 ** * V 1 **
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Contact: 04 to 50
- ③ Plating code:
2=Gold Flash plated over 1.27μm(50μ") Nickel
3=0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
4=0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ④ Tail & Mounting Style:
V=Straight DIP Type
- ⑤ Insulator Material & Color:
1=Nylon 6T , Color Black
- ⑥ Option Code:
See Table PDF. File No. CH0201T

Recommended P.C. Boarded Layout

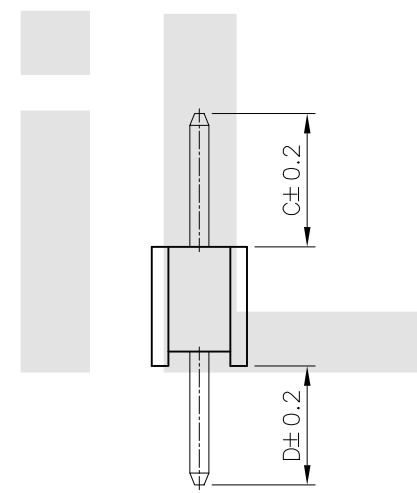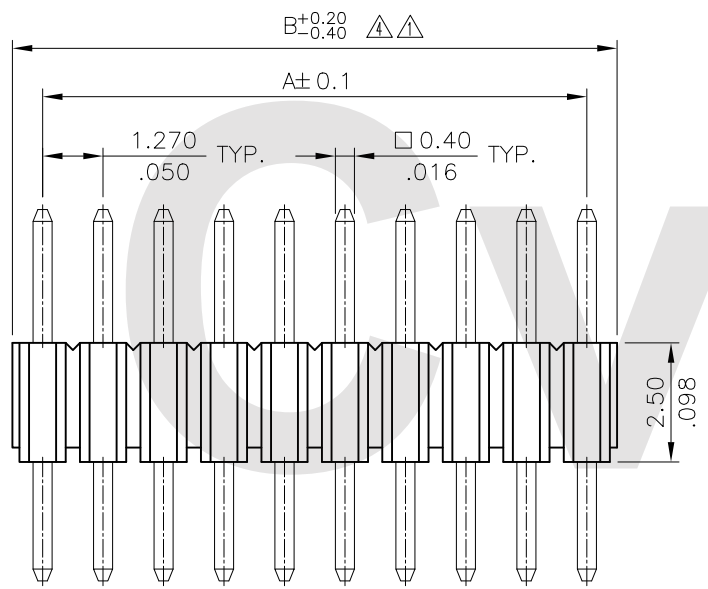

DIM. A = 1.27 X No. of Spaces
DIM. B = DIM. A + 1.27
* Available in 4 through 50 Circuits

Lead Free Process
RoHS Compliant

△4	Ken	4/10-17	ECNT117071/ECRB117010			DATE	UNIT: mm / inch	TITLE: 1.27mm(.050") SINGLE ROW BOARD MOUNT PIN HEADER		瀚荃股份有限公司 CviLux Corporation		
△3	Sun	10/6-08	ECN08477/ECR08117-1		DRAWN BY: Ken	4/28-17	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:			DRAWING NO. CH0201SE	PART NO. CH02***V1**
△2	Sandy	3/20-08	ECN08141/ECR08030-1		ENGINEER: Sun	5/02-17	.X ± 0.25/.010 X' ± 1"	FINISH:			SCALE 6 / 1	SHEET 1 OF 1
△1	Sandy	08/30/04	ECN04327		CHECKED BY: Eisley	5/03-17	.XX ± 0.15/.006 X' ±					
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	5/03-17	.XXX ± 0.08/.003 XX' ±					