
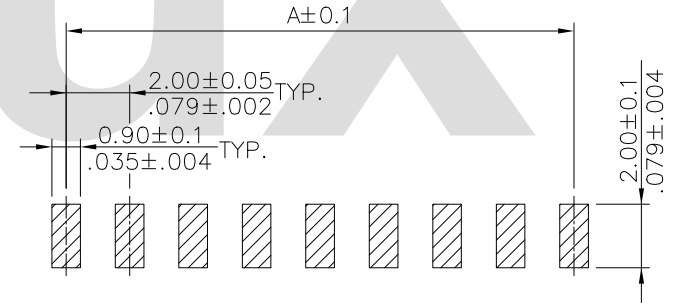
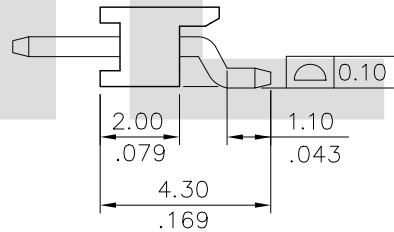
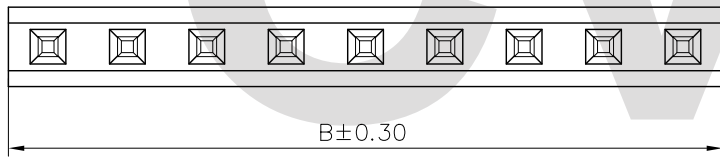


Material:  
\* Contact: Brass

Ordering Code

CH11 \*\* 2 S A 01 -NH  
 ① ② ③ ④ ⑤ ⑥ ⑦


- ① Series No.
- ② No. of Circuits 02~40 PIN
- ③ Plating Code:  
2= Gold flash plated over 1.27 μm(50 μ") Nickel
- ④ Tail Style: S= Side entry SMT Type
- ⑤ Insulation:  
A= LCP UL 94V-0, Color Black
- ⑥ 01= Pin Length
- ⑦ -NH=For Lead Free IR Processes and Halogen-Free

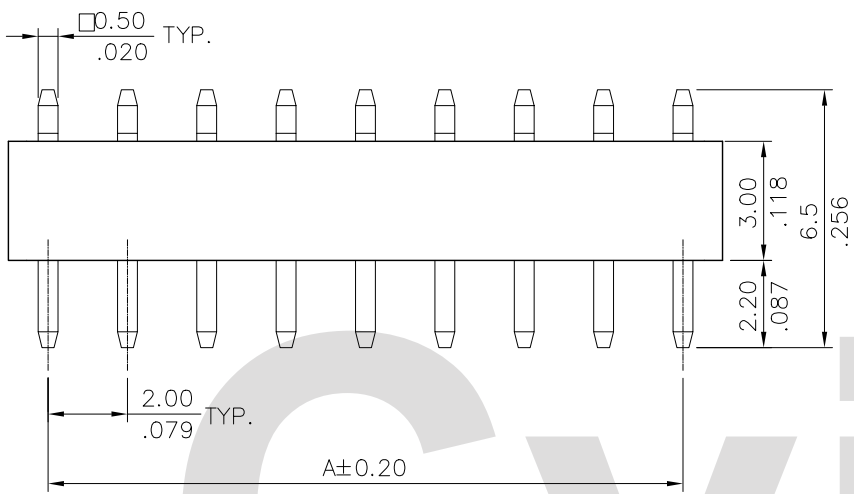

Recommended P.C. Board Layout

DIM. A=2.00 X NO. OF SPACES  
 DIM. B=A + 2.0  
 \* Available in 2 through 40 circuits

Lead Free Process  
 RoHS Compliant

4	Tim	3/25-10'	ECN10082	APPROVED BY: David	DATE: 3/29-10'	UNIT: mm / inch	TITLE: 2.00MM(.079") SIDE ENTRY SINGLE ROW BORAD MOUNT PIN HEADER		 瀚荃股份有限公司 CviLux Corporation	DRAWING NO. CH1161SA	PART NO. CH11**2SA01-NH	SCALE 5/ 1	SHEET 1 OF 1		
							TOLERANCE UNLESS OTHERWISE SPECIFIED							MATERIAL:	
							.X ± 0.30 / .012	X' ± 1"							CUSTOMER: BV1008
							.XX ± 0.20 / .008	.X' ±							
2010.05.05 ISSUED		REVISIONS													
CVILUX CORP		DRAWN BY: Tim		ENGINEER: Eisley		CHECKED BY: David		APPROVED BY: David		DATE: 3/29-10'		MATERIAL: BV1008			