



A = 2.00 * No. of Spaces
 B = A + 2.0
 * Available in 2 through 40 circuits

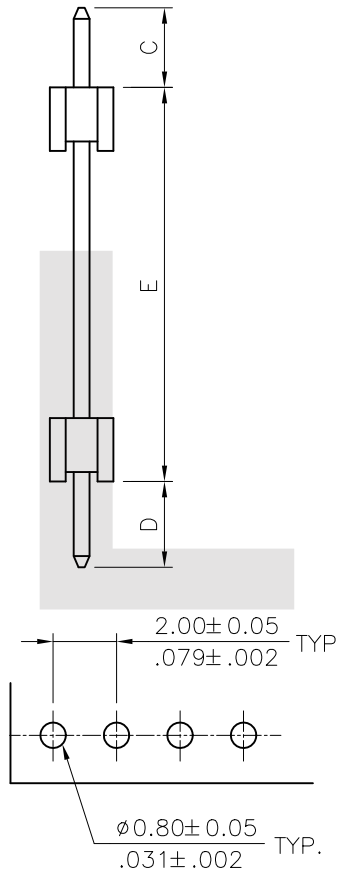

NOTES:

- * Material:
Contact: Brass
- ⚠ * Pin overall Length 30.0mm Max.

Ordering Code



- ① Series No.
- ② NO. of Circuits
- ③ Plating code:
 1= 3.05μm(120μ") Min. Tin over 0.76μm(30μ") Nickel
 2= Gold flash plated over 1.27μm(50μ") Nickel
 3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
 4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ④ V= Straight
- ⚠ ⑤ Insulator: 1= PBT UL 94V-0, Color Black
A= Nylon 6T UL 94V-0, Color Black
- ⑥ Pin Length Option Code:
See Table PDF. File No. CH2101T

Recommended P.C. Board Layout

RoHS Compliant

④	Aaron	10/21-16'	ECNT116250/ECRB116072		DATE	UNIT: mm / inch	TITLE: 2.00MM(.079") SINGLE ROW DUAL BODY BORAD MOUNT PIN HEADER	瀚荃股份有限公司 CviLux Corporation
③	Sun	10/6-08'	ECN08478/ECR08118-1	DRAWN BY: Aaron	11/2-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②	Casey	5/28/04'	ECN04208	ENGINEER: Sun	11/18-16'	.X ± 0.30/.012 X: ± 1'	FINISH:	
①	Sun	4/09/04'	ECN04144	CHECKED BY: Eisley	11/21-16'	.XX ± 0.20/.008 .X: ±	DRAWING NO. CH2101SH PART NO. CH21***V***	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	11/21-16'	.XXX ± 0.10/.004 .XX: ±	SCALE 4 / 1	SHEET 1 OF 1

CIVILUX CORP
 2016.11.25
 ISSUED