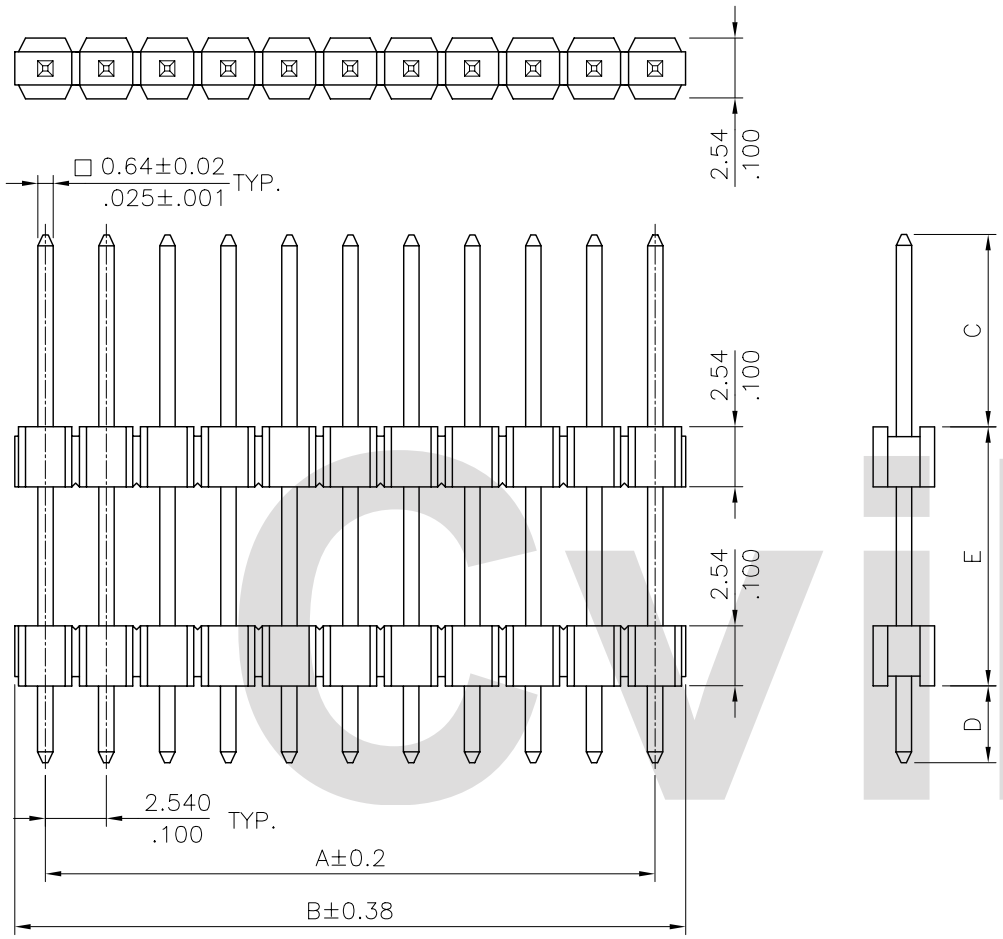

Notes:
* Material:
Contact: Brass
⚠4* Pin overall Length 30.0mm Max.

Ordering Code

CH34 ① ** ② * ③ V ④ * ⑤ ** ⑥

① Series No.
② No. of Circuits
③ Plating Code:
1= 3.05 μm(120 μ") Min. Tin over 0.76 μm(30 μ") Nickel
2= Gold flash plated over 1.27 μm(50 μ") Nickel
④ V= Straight
⑤ Insulation: 2= PBT UL 94V-0, Color Black
A= Nylon 6T UL 94V-0, Color Black
⑥ Pin Length Option cord:
See Table PDF. File No. CH3401T



Recommended P.C. Board Layout

CVILUX.XORP
2008.10.14
ISSUED

A = 2.54 * No. of Spaces
B = A + 2.36
* Available in 2 through 40 circuits

RoHS Compliant

SYM	NAME	DATE	REVISIONS
⚠4	Sun	10/6-08'	ECN08478/ECR08118-1
⚠3	Bill	4/23/07'	ECN07148/ECR07059-0
⚠2	LYNN	12/13-04	ECN04465/ECR04109-0
⚠1	SUN	4/09/04'	ECN04144

		DATE
DRAWN BY:	Sun	10/07-08'
ENGINEER:	Eisley	10/07-08'
CHECKED BY:	Alex	10/07-08'
APPROVED BY:	Alex	10/07-08'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.30/.012	X.° ± 1°
.XX ± 0.20/.008	.X° ±
.XXX ± 0.10/.004	.XX° ±

TITLE: 2.54MM(.100") SINGLE ROW DUAL BODY BOARD MOUNT PIN HEADER

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CH3401SO	PART NO.	CH34***V***
SCALE	3 / 1	SHEET 1 OF 1	