

Notes:


1. DIM. E = 5.08 min.
- △ 2. Pin overall length 30.0 max.
3. Material:
 - * Insulator: Nylon 6T With 30% GF. UL 94V-0 Color Black
 - * Square Pin: Brass
 - * Pick & Place Pad: Nylon 6T UL 94V-0 Color Nature

Ordering Code:


CH34 ** * M 1 ** - 0 *
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② No. of Contact: 02 to 40
- ③ Plating code:
 - 1=3.05μm(120μ") Min. Tin over 0.79μm(30μ") Nickel
 - 2=Gold Flash plated over 1.27μm(50μ") Nickel
 - 3=0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
 - 4=0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ④ Tail & Mounting Style:
 - M=Straight SMT Type
- ⑤ Insulator Material & Color:
 - 1=Nylon 6T , Color Black
- ⑥ Option Code:
 - See Table PDF. File No. CH3410T
- ⑦ Pin Size: 0=Original design
- ⑧ 0=Without Pick & Place Pad (Tube packaged)
 P=With Pick & Place Pad (Tape & Reel packing)

Recommended P.C. Board Layout

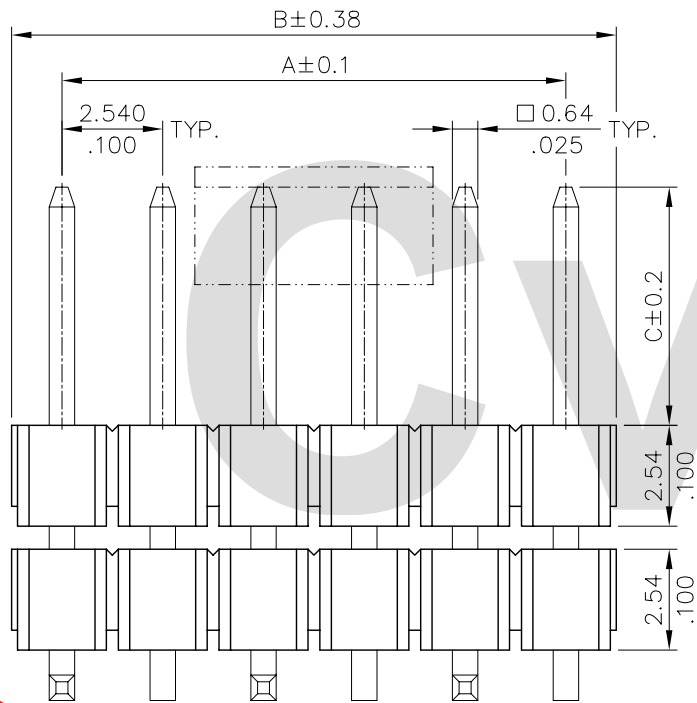

Pick & Place Pad

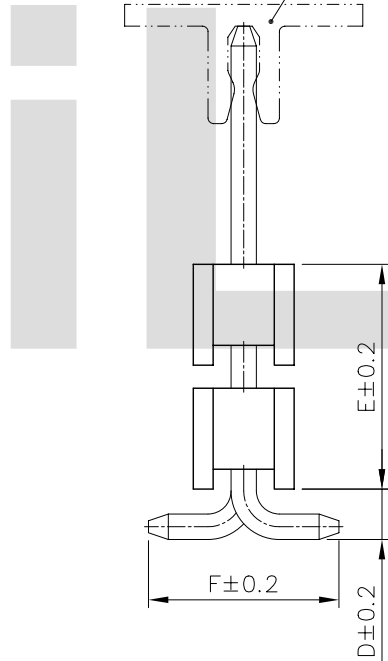

CVILUX.XORP
 2008.10.14
 ISSUED

DIM. A = 2.54 X No. of Spaces
 DIM. B = DIM. A + 2.36
 * Available in 2 through 40 Circuits

RoHS Compliant

△4					DATE	UNIT: mm / inch	TITLE: 2.54mm(.100") SINGLE ROW DUAL BODY SURFACE BOARD MOUNT PIN HEADER	瀚荃股份有限公司 CviLux Corporation
△3				DRAWN BY: Sun	10/07-08'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
△2	Sun	10/6-08'	ECN08478/ECR08118-1	ENGINEER: Easley	10/07-08'	.X ± 0.25/.010 X' ± 1'	FINISH:	DRAWING NO. CH3410SD PART NO. CH34***M1**-0*
△1	Sun	5/07/04'	ECN04183	CHECKED BY: Alex	10/07-08'	.XX ± 0.15/.006 .X' ±		SCALE 5 / 1 SHEET 1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	10/07-08'	.XXX ± 0.10/.004 .XX' ±		