

Material:

Insulator: Glass filled Polyester UL 94V-0


Contact: Brass

Shell: Steel, Tin plated as standard

Ordering Code

36W4 P0 S0 A 100 000
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Connector Type:
P0= Plug
- ③ Contact tail Style:
S0= Solder Cup type
- ④ Singal Contact Plating:
A= Seletive Gold flash plated over Nickel
B= Seletive 15 μ " Gold plated over Nickel
C= Seletive 30 μ " Gold plated over Nickel
- ⑤ Insulator Color:
100= Black
600= Green
- ⑥ Mounting Style:
000= With ϕ 3.05mm holes on shell
A00= Riveted #4-40 UNC close nuts on front shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell

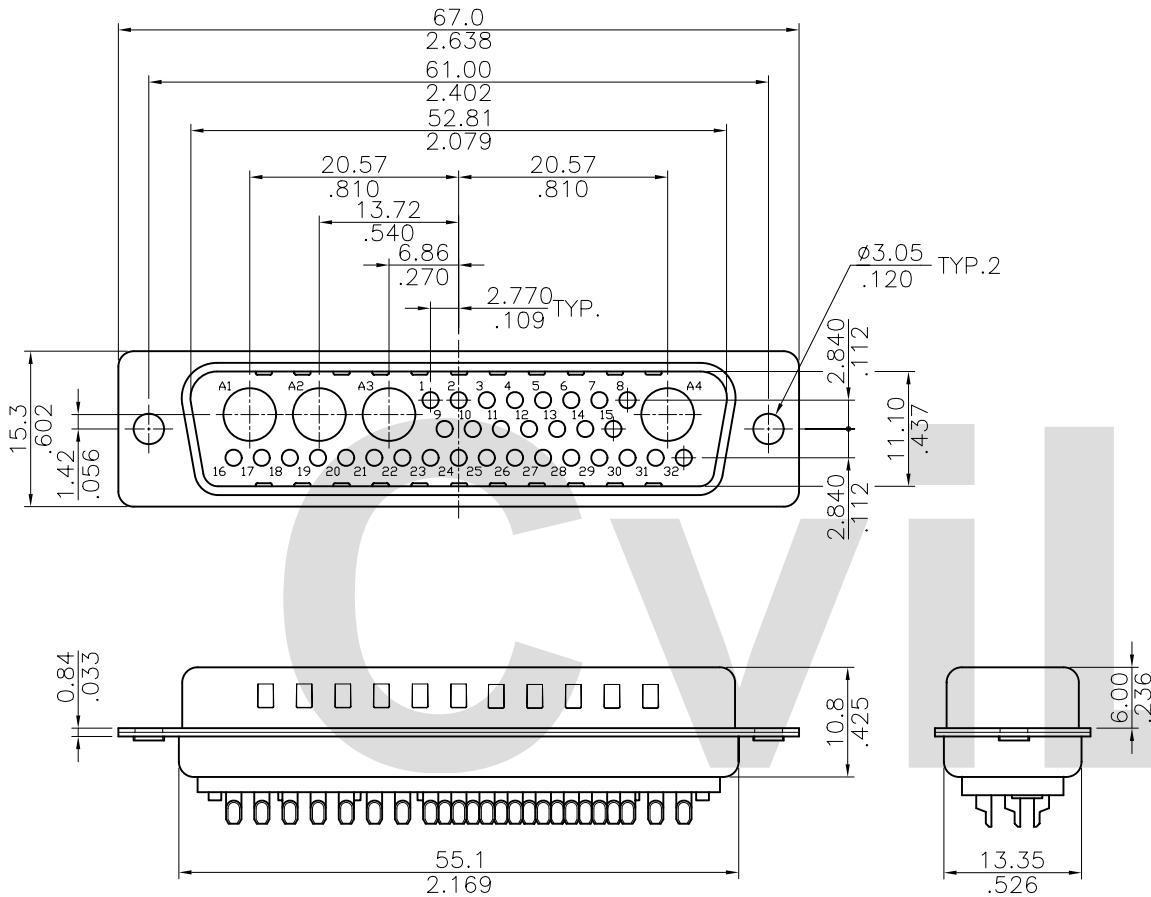

Mounting Style

RoHS Compliant

Code	000	Code	A00	Code	B00	Code	C00
			DIM. L= 5.8mm		DIM. L= 4.0mm		DIM. L= 4.0mm

④				DATE	UNIT: mm / inch	TITLE: 36W4 MALE COMBO D-SUB CONNECTOR (SOLDER CUP TYPE)	瀚荃股份有限公司 CviLux Corporation	
③				DRAWN BY: James	11/18-02'	MATERIAL:		
②				ENGINEER: David	11/19-02'			FINISH:
①				CHECKED BY: David	11/19-02'	DRAWING NO. 36W401SC		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	11/19-02'	SCALE		2 / 1