



Notes:

1. DIM. E = 5.0 min.
2. Pin overall length 20.0 max.
3. Material:
 - * Insulator: Nylon 6T With 30% GF. UL 94V-0 Color Black
 - * Square Pin: Brass

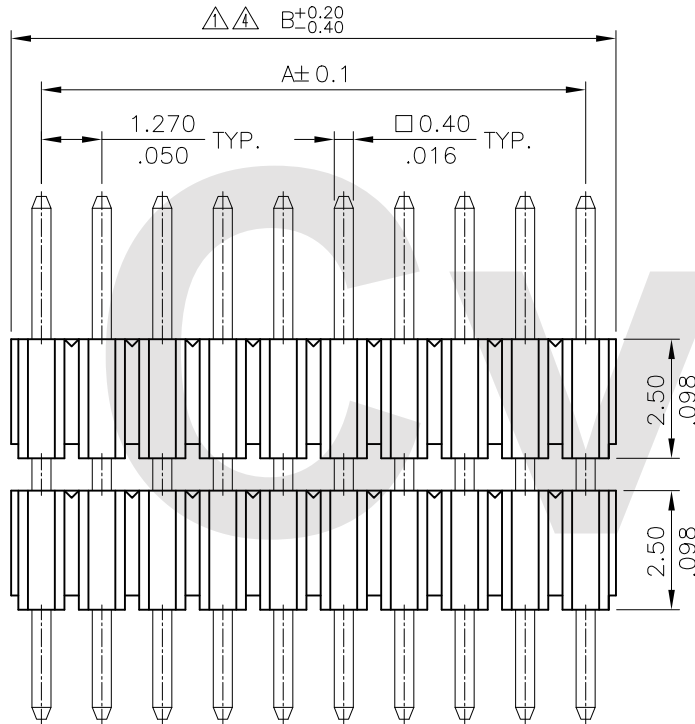

Recommended P.C. Board Layout

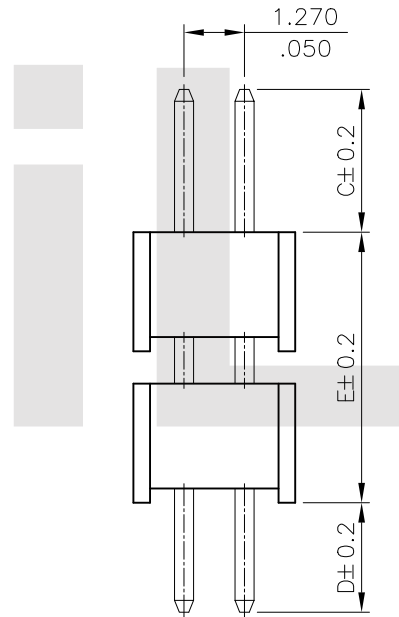

Ordering Code:

CH57 ** * V 1 **
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Contact: 06 to 60
- ③ Plating code:
 - 2=Gold Flash plated over 1.27μm(50μ") Nickel
 - 3=0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
 - 4=0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ④ Tail & Mounting Style:
 - V=Straight DIP Type
- ⑤ Insulator Material & Color:
 - 1=Nylon 6T , Color Black
- ⑥ Option Code:
 - See Table PDF. File No. CH5701T

DIM. A = 1.27 X No. of Spaces

DIM. B = DIM. A + 1.27

* Available in 6 through 60 Circuits

Lead Free Process

RoHS Compliant

④	Ken	4/10-17	ECNT117071/ECRB117010		DATE	UNIT: mm / inch	TITLE: 1.27mm(.050") DUAL ROW DUAL BODY BOARD MOUNT PIN HEADER
③	Sun	10/15-08	ECN08479/ECR08119-1	DRAWN BY: Ken	4/12-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:
②	Sandy	3/20/08'	ECN08141/ECR08030-1	ENGINEER: Sun	5/02-17'	.X ± 0.25/.010 X' ± 1'	
①	Sandy	08/27/04'	ECN04327	CHECKED BY: Eisley	5/03-17'	.XX ± 0.15/.006 X' ±	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	5/03-17'	.XXX ± 0.08/.003 XX' ±	

CIVILUX CORP
 2017.05.05
 ISSUED



瀚荃股份有限公司
 CviLux Corporation

DRAWING NO.	CH5701SD	PART NO.	CH57***V1**
SCALE	6 / 1	SHEET	1 OF 1