

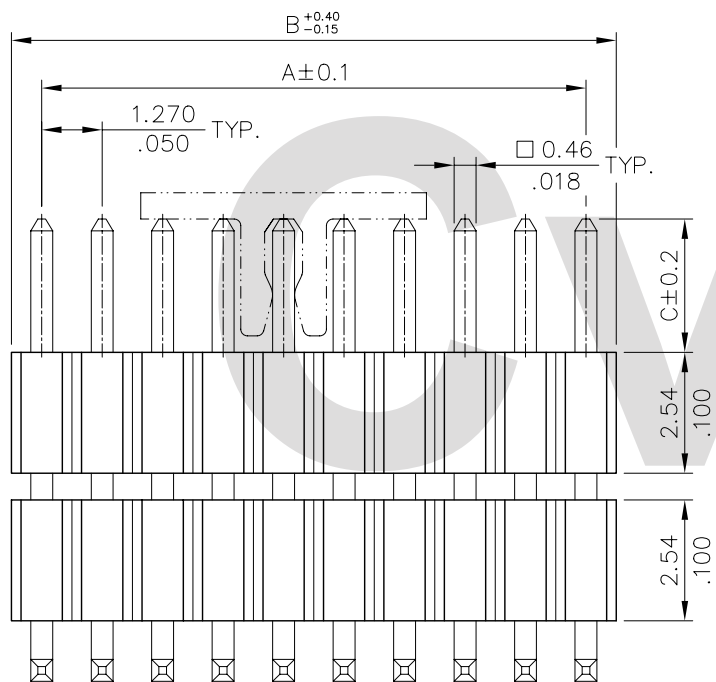


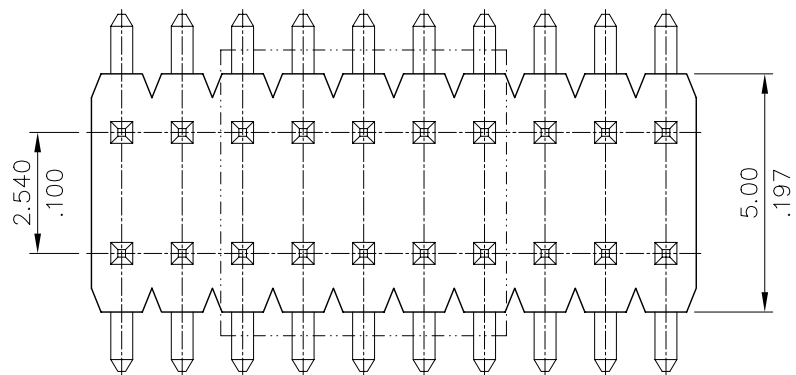


DIM. A = 1.27 X No. of Spaces

DIM. B = DIM. A + 1.27

* Available in 6 through 100 Circuits

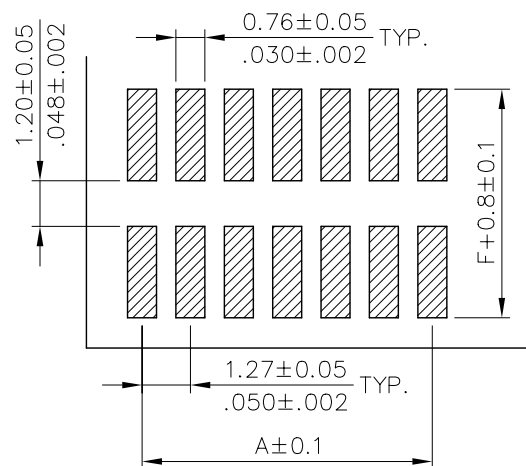

Recommended P.C. Board Layout

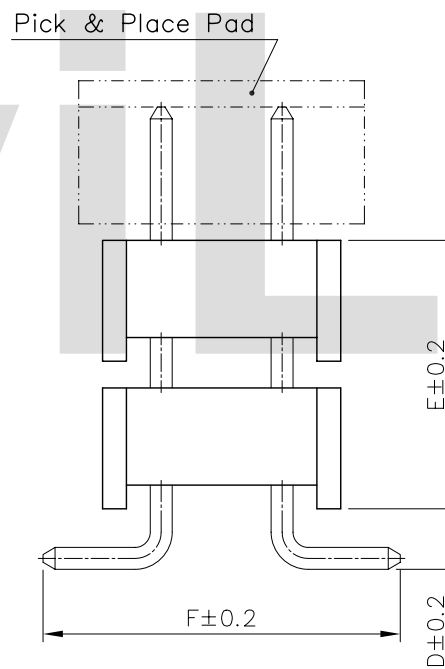

Notes:

- DIM. E = 5.08 min.
- Pin overall length 26.0 max.
- Material:
 - * Insulator: Nylon 6T With 30% GF. UL 94V-0 Color Black
 - * Square Pin: Brass
 - * Pick & Place Pad: Nylon 6T UL 94V-0 Color Nature

Ordering Code:

CH67 ** * M 1 ** - 0 *
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- Series No.
- No. of Contact: 06 to 100(X1=100)
- Plating code:
 - 2=Gold Flash plated over 1.27 μ m(50 μ) Nickel
 - 3=0.38 μ m(15 μ) Gold plated over 1.27 μ m(50 μ) Nickel
 - 4=0.76 μ m(30 μ) Gold plated over 1.27 μ m(50 μ) Nickel
- Tail & Mounting Style:
 - M=Straight SMT Type
- Insulator Material & Color:
 - 1=Nylon 6T, Color Black
- Option Code:
 - See Table PDF. File No. CH6702T
- Pin size: 0=Original design
- 0=Without Pick & Place Pad (Tube packaged)
P=With Pick & Place Pad (Tape & Reel packing)

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 1.27X2.54mm(.050"x100") DUAL ROW DUAL BODY SURFACE BOARD MOUNT PIN HEADER	 瀚菱股份有限公司 CviLux Corporation		
3					DRAWN BY: Sun	5/19 04'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
2					ENGINEER: Eisle	5/21 04'	.X ± 0.25/.010 X' ± 1'	DRAWING NO. CH6702SD PART NO. CH67***M1**-0*		
1	SUN	5/07/04'	ECN04183		CHECKED BY: David	5/26 04'	.XX ± 0.15/.006 .X' ±			
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	5/26 04'	.XXX ± 0.08/.003 .XX' ±	FINISH:	SCALE	6 / 1
									SHEET	1 OF 1

