
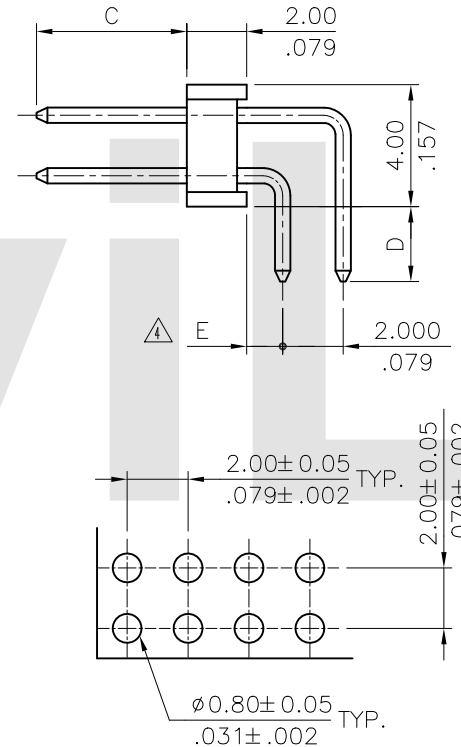
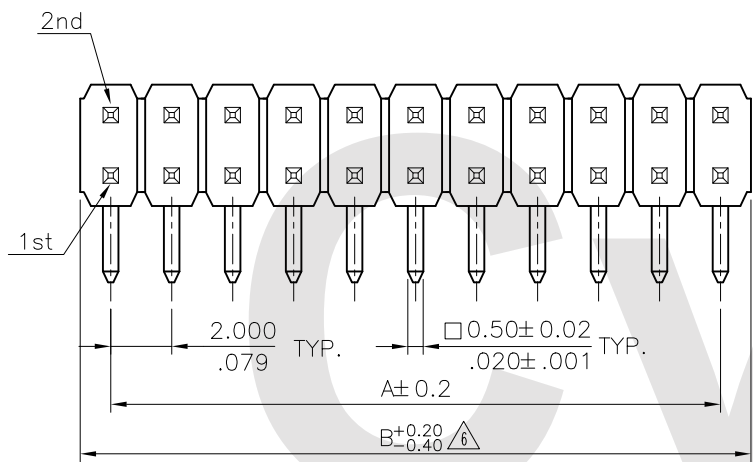


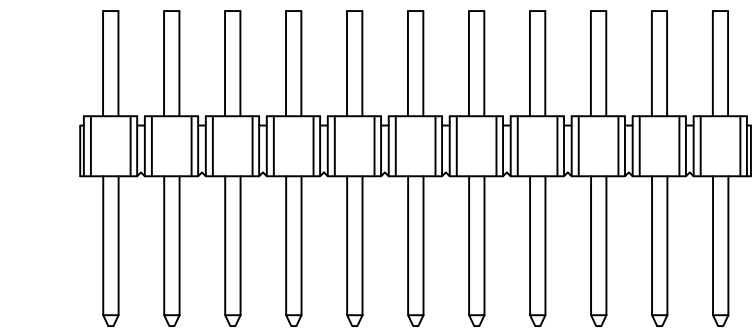

Notes:

- * Material:
Contact: Brass
- △ * Pin overall Length 30.0mm Max.

Ordering Code

CH71 ** * H * **
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits
- ③ Plating Code:
 - 1= 3.05 μ m(120 μ ") Min. Tin over 0.76 μ m(30 μ ") Nickel
 - 2= Gold flash plated over 1.27 μ m(50 μ ") Nickel
 - 3= 0.38 μ m(15 μ ") Gold plated over 1.27 μ m(50 μ ") Nickel
 - 4= 0.76 μ m(30 μ ") Gold plated over 1.27 μ m(50 μ ") Nickel
- ④ H= Right angle
- ⑤ Insulation:
 - 1= PBT UL 94V-0, Color Black (ROHS Compliant)
 - A= Nylon 6T UL 94V-0, Color Black
- ⑥ Pin Length Option cord:
See Table PDF. File No. CH7102T

A = 2.00 * No. of Spaces
B = A + 2.00
△ * Available in 4 through 60 circuits



Recommended P.C. Board Layout

△6	Aaron	10/21-16'	ECNT116250/ECRB116072	DATE	UNIT: mm / inch	TITLE: 2.00MM(.079") RIGHT ANGLE DUAL ROW BOARD MOUNT PIN HEADER	 瀚荃股份有限公司 CviLux Corporation			
△5	Sun	10/15/08'	ECR08120-1/ECN08480	DRAWN BY: Aaron	11/2-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
△4	Sun	7/29-08'	ECN08359	ENGINEER: Sun	11/18-16'	.X ± 0.30 / .012 X' ± 1'	DRAWING NO. CH7102SI PART NO. CH71***H***			
△3	Sun	1/19/06'	ECN06019	CHECKED BY: Eisley	11/21-16'	.XX ± 0.20 / .008 .X' ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	11/21-16'	.XXX ± 0.10 / .004 .XX' ±	FINISH:			
							SCALE	4 / 1	SHEET	1 OF 1