

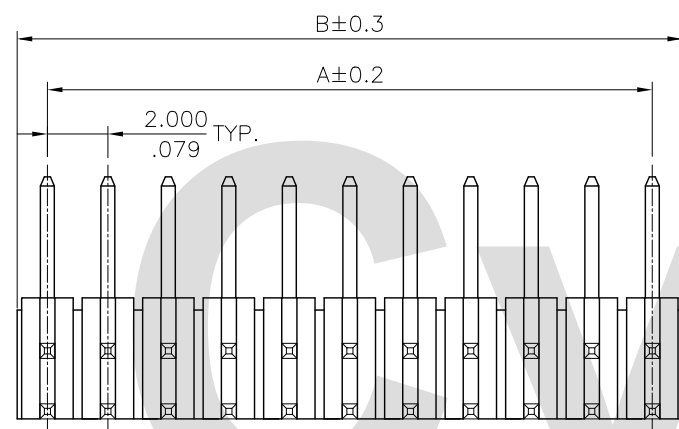


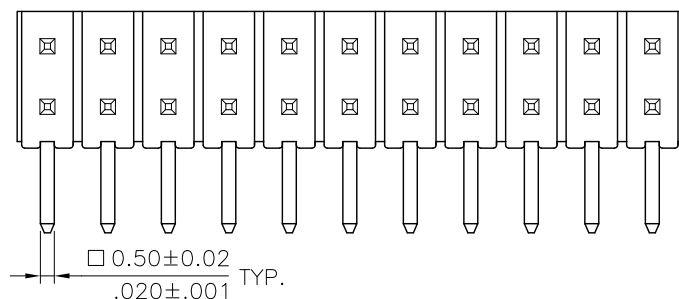

A = 2.00 X No. of Spaces

B = A + 2.00

△* Available in 6 through 50 circuits

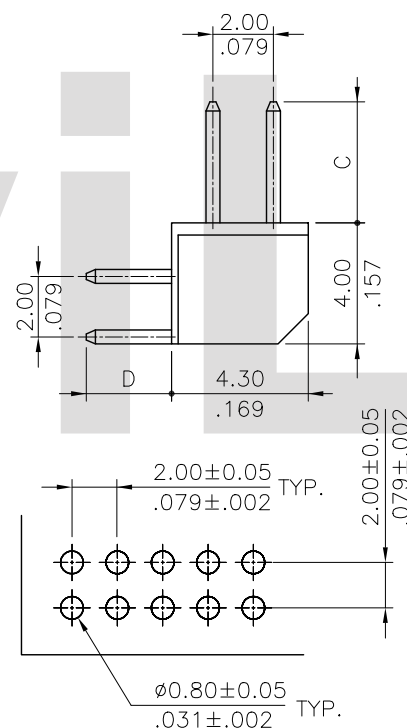

Material:
* Contact: Brass

Ordering Code

CH72 22 2 H 1 00
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits

△ ③ Plating Code:

Code	Contact Area	Solder Area	Under Plating
A	Gold flash	100u" Tin	50u" Nickel
C	30u" Gold	100u" Tin	50u" Nickel
1	100u" Tin		30u" Nickel
2	Gold flash		50u" Nickel
3	15u" Gold		50u" Nickel
4	30u" Gold		50u" Nickel

④ H= Right angle

⑤ Insulation: 1= Nylon 6T UL 94V-0, Color Black

⑥ Pin Length Option code:

Option Code	Dimension	
	C	D
00	4.00(.157)	2.80(.110)

Recommended P.C. Board Layout

RoHS Compliant

6	Karen	5/19-10'	ECN10162	2010.06.08 ISSUED		DATE	UNIT: mm / inch	TITLE: 2.00MM(.079") RIGHT ANGLE DUAL ROW BOARD MOUNT PIN HEADER	瀚荃股份有限公司 CviLux Corporation			
5	Karen	9/10/08'	ECN8441		DRAWN BY:	Karen	5/19-10'	TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL:		
4	Sandy	12/14/05'	ECN05417/ECR05119-0		ENGINEER:	Clark	5/19-10'	.X ± 0.30 / .012 X" ± 1"				
3	Sandy	9/08/04'	ECN04340		CHECKED BY:	David	5/19-10'	.XX ± 0.20 / .010 .X" ±		FINISH:		
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	5/19-10'	.XXX ± 0.10 / .004 .XX" ±	DRAWING NO.	CH7202SH		PART NO.	CH72***H100
									SCALE	3 / 1	SHEET	1 OF 1