

Material:

* Insulation: Nylon 6T UL 94V-0

* Contact: Brass

Ordering Code:

CH87 ** * M 1 **
 ① ② ③ ④ ⑤ ⑥

① Series No.

② No. of contacts

③ Plating option:

1= 3.05μm(120μ") Min. Tin
 over 1.27μm(50μ") Nickel





2= Gold flash plated over 1.27μm(50μ") Nickel

3= 0.38μm(15μ") Gold plated
 over 1.27μm(50μ") Nickel

④ Tail style: M= SMT Type

⑤ Color: 1= Black

⑥ Option code: 00= Without Pad(Standard)
 P0= With Pad

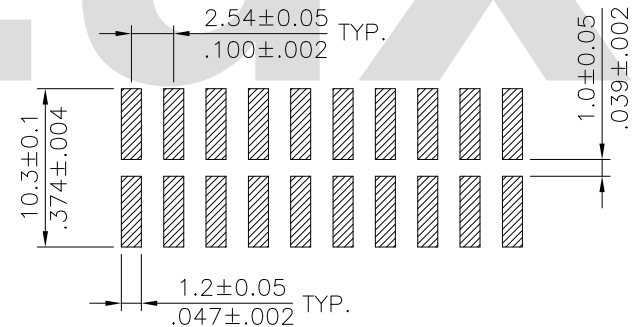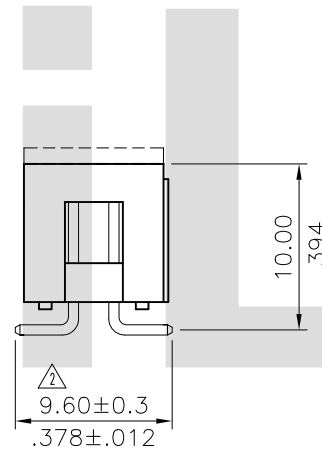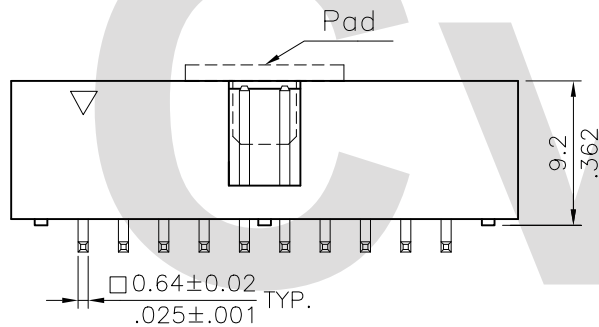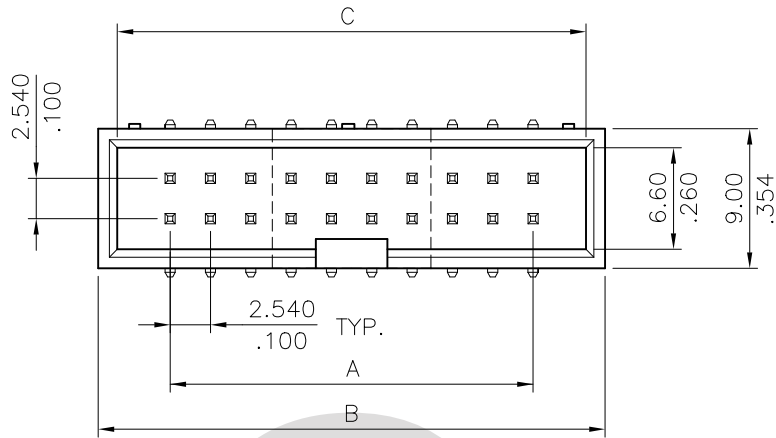

Recommended P.C. Board Layout


A = 2.54 * No. of Spaces

△ B = A + 10.16

△ C = A + 7.86

△ * Available circuits: 6, 8, 10, 12, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50, 60 and 64

RoHS Compliant

⑤	Enya	11/19-13'	ECNT113127/ECRT113039		DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") SMT TYPE DUAL ROW BOX PIN HEADER	 瀚荃股份有限公司 CviLux Corporation
④	Karen	8/17-09'	ECN09419	DRAWN BY: Enya	11/20-13'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
③	Bill	04/22/08	ECN08193	ENGINEER: Sun	11/21-13'	.X ± 0.30/.012 X' ± 1'	FINISH:	DRAWING NO. CH8705SG PART NO. CH87***M1**
②	Sandy	4/28/05'	ECN05145/ECR05038-0	CHECKED BY: Eisley	11/21-13'	.XX ± 0.20/.008 X' ±		SCALE 2 / 1 SHEET 1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	11/21-13'	.XXX ± 0.10/.004 X' ±		

CVILUX CORP
 2013.12.05
 ISSUED