
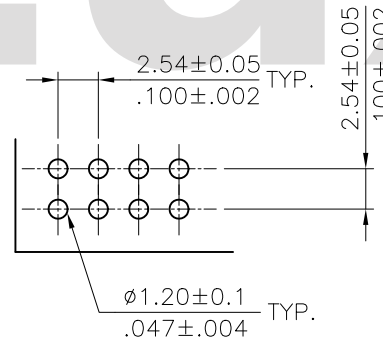




Material:  
\* Contact: Brass



Ordering Code:

CH87 \*\* \* V \* \*\*  
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of contacts
- ③ Plating option:  
1= 3.05µm(120µ") Min. Tin over 1.27µm(50µ") Nickel  
2= Gold flash plated over 1.27µm(50µ") Nickel  
3= 0.38µm(15µ") Gold plated over 1.27µm(50µ") Nickel  
4= 0.76µm(30µ") Gold plated over 1.27µm(50µ") Nickel
- ④ V= Straight
- ⑤ Insulation:  
2= PBT UL 94V-0, Color Black  
A= Nylon 6T UL 94V-0, Color Black
- ⑥ Option code: 00= Dim.D 3.1mm  
01= Dim.D 2.8mm

A = 2.54 \* No. of Spaces  
B = A + 10.16  
C = A + 7.86

② \* Available circuits: 6, 8, 10, 12, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50, 60 and 64

Recommended P.C. Board Layout

RoHS Compliant

④						DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") STRAIGHT DUAL ROW BOX PIN HEADER	瀚荃股份有限公司 CviLux Corporation	
③						DRAWN BY: Enya 11/20-13'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:		
②	Enya	11/19-13'	ECNT113127/ECRT113039		ENGINEER: Sun	11/21-13'	.X ± 0.30/.012    X: ± 1"	FINISH:	DRAWING NO. CH8720SC	PART NO. CH87***V***
①	SUN	11/22-05'	ECN05392		CHECKED BY: Eisley	11/21-13'	.XX ± 0.20/.008    .X: ±		SCALE 2 / 1	SHEET 1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	11/21-13'	.XXX ± 0.10/.004    .XX: ±				