

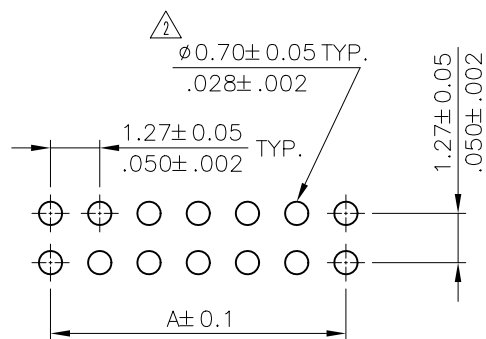
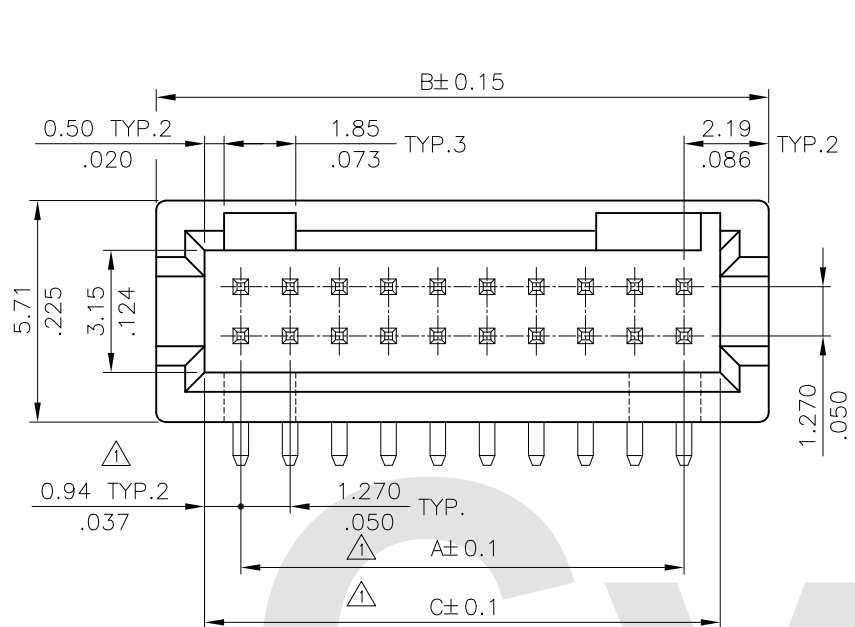


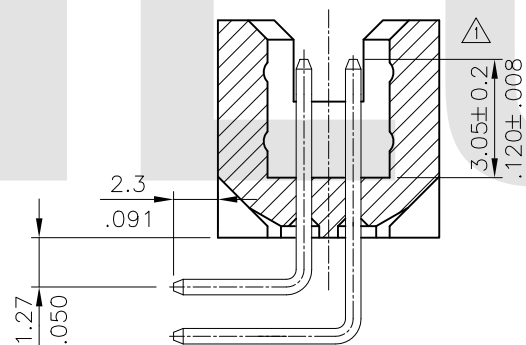

Recommended P.C. Boarded Layout

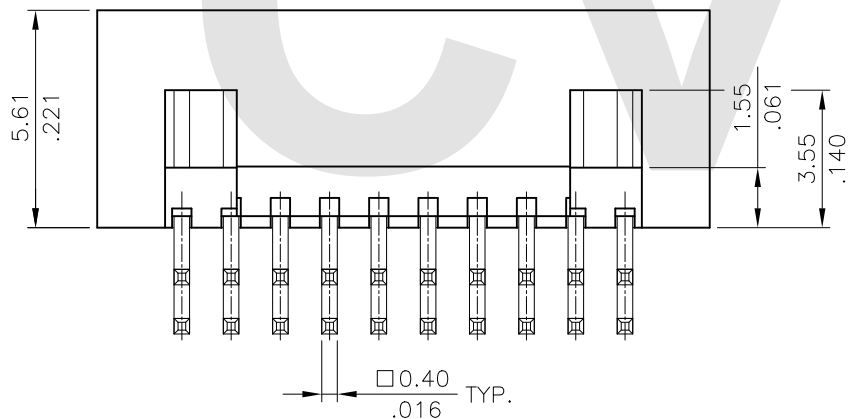

DIM. A = 1.27 X No. of Spaces
 DIM. B = DIM. A + 4.38
 DIM. C = DIM. A + 1.88

Material:

- * Insulator: Nylon 6T With 30% GF.
UL 94V-0 Color Black
- * Square Pin: Brass

Ordering Code:

CHC2 ** * H 1 00 -2 0
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② No. of Contact: 10 to 60
- ③ Plating code:
2=Gold Flash plated over 1.27μm(50μ") Nickel
3=0.38μm(15μ") Gold plated over 1.27μm(50u") Nickel
4=0.76μm(30μ") Gold plated over 1.27μm(50u") Nickel
- ④ Tail & Mounting Style:
H=Right Angle DIP Type
- ⑤ Insulator Material & Color:
1=Nylon 6T , Color Black
- ⑥ Option Code:
00=Standard
- ⑦ Pin Size:
2=0.4 Square Pin
- ⑧ 0=Without Pick & Place Pad (Tube packaged)

* Available in 10 through 60 Circuits

Lead Free Process

RoHS Compliant

CIVILUX CORP

2016.11.10

ISSUED

④						DATE	UNIT: mm / inch	TITLE: 1.27mm(.050") SQUARE PIN BOX HEADER(DIP TYPE)	 瀚荃股份有限公司 CviLux Corporation			
③	Ken	11/7-16'	ECNT116270/ECRT116079	DRAWN BY:	Ken	11/7-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				
②	Sandy	3/20/08'	ECN08141/ECR08030-1	ENGINEER:	Sun	11/7-16'	.X ± 0.25/.010 X' ± 1'	FINISH:	DRAWING NO.	CHC206SD	PART NO.	CHC2***H100-20
①	Sandy	3/28/05'	ECN05106	CHECKED BY:	Eisley	11/8-16'	.XX ± 0.15/.006 X' ±		SCALE	5 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	11/8-16'	.XXX ± 0.08/.003 XX' ±					