


Note:

- 1. Material:
- \* Insulation: Nylon 66 UL 94V-0
- \* Contact: Brass
- △ 2. For Tin-Lead Wave Flow Process

Ordering Code:

CI01 \*\* P 1 H D 0  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② No. of Circuits
- ③ Contact type: P= Pin Header
- ④ Plating option:  
 1= 3.05μm (120μ") Tin  
 over 0.76μm(30μ") Nickel
- ⑤ Type: H=Right angle
- ⑥ Other Option: D= Dual Row Type
- △ ⑦ Color: 0=Nature;1=Black;9=Gray

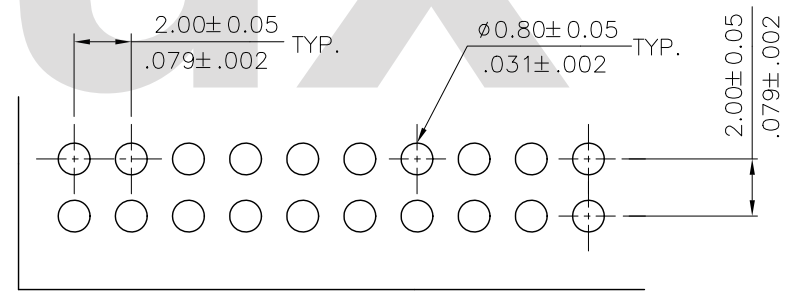

Recommended P.C. Board Layout

A = 2.0 x (No. of Circuits/2-1)  
 B = A + 3.9  
 C = A + 2.7

△ \* Available in 6 through 34 circuits

Tin-Lead Process      RoHS compliant

△ 7	Enya	3/6-13'	ECN13056-0/ECR13007-1			DATE	UNIT: mm / inch	TITLE:		
△ 6	Tim	11/09-10'	ECR10145-0/ECN10364		DRAWN BY:	Enya	3/06-13'	TOLERANCE UNLESS OTHERWISE SPECIFIED		2.00mm PIN HEADER DIP TYPE
△ 5	Sandy	12/12/05	ECN05429		ENGINEER:	Eisley	3/09-13'	.X ± 0.30/.012    X' ± 1'		MATERIAL:
△ 4	Sandy	12/10/04'	ECN04495		CHECKED BY:	Eisley	3/09-13'	.XX ± 0.20/.008    .X' ±		FINISH:
SYM	NAME	DATE	REVISIONS		APPROVED BY:	David	3/09-13'	.XXX ± 0.10/.004    .XX' ±		
			DRAWING NO.	CI0114SI	PART NO.	CI01**P1HD*				
			SCALE	4 / 1	SHEET	1 OF 1				