
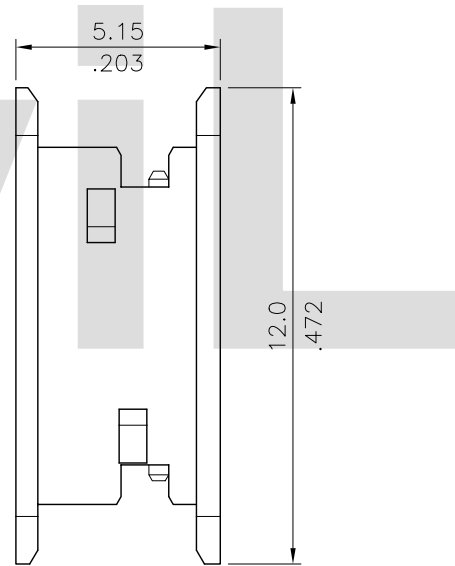


Material:
 * Insulation: Nylon 66 UL 94V-0
 * Contact: Brass

Ordering Code:

CI01 ** P 1 P D 0
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② No. of Circuits:
- ③ P= Pin header
- ④ Plating: 1= 3.05 μ m(120 μ "") Min. Tin over 0.76 μ m(30 μ "") Nickel
- ⑤ Type: P= Adapter
- ⑥ D= Dual Row Type
- ⑦ Other Option: 0= Color Nature(Standard)

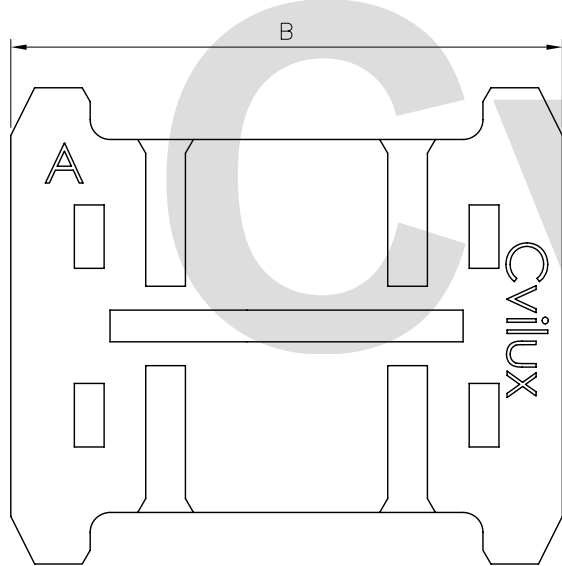

Circuits	Dimension		
	A	B	C
6	4.00(.157)	9.9(.390)	6.70(.264)
8	6.00(.236)	11.9(.469)	8.70(.343)
10	8.00(.315)	13.9(.547)	10.70(.421)
12	10.00(.394)	15.9(.626)	12.70(.500)
14	12.00(.472)	17.9(.705)	14.70(.579)
16	14.00(.551)	19.9(.783)	16.70(.657)
18	16.00(.630)	21.9(.862)	18.70(.736)
20	18.00(.709)	23.9(.941)	20.70(.815)
22	20.00(.787)	25.9(1.020)	22.70(.894)
24	22.00(.866)	27.9(1.098)	24.70(.972)
26	24.00(.945)	29.9(1.177)	26.70(1.051)
28	26.00(1.024)	31.9(1.256)	28.70(1.130)
30	28.00(1.102)	33.9(1.335)	30.70(1.209)
32	30.00(1.181)	35.9(1.413)	32.70(1.287)
34	32.00(1.260)	37.9(1.492)	34.70(1.366)

RoHS Compliant

④																			
③																			
②																			
①	Eager	04/20-07		ECN07135															
SYM	NAME	DATE		REVISIONS															

CIVILUX CORP.

2007.04.30

ISSUED

DATE

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X	± 0.30/012	X.*	± 1'
.XX	± 0.20/008	.X*	±
.XXX	± 0.10/004	.XX*	±

TITLE: 2.00MM(.079")

WIRE TO WIRE CONNECTOR

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CI0199SA	PART NO.	CI01**P1PDO
SCALE	5 / 1	SHEET	1 OF 1