


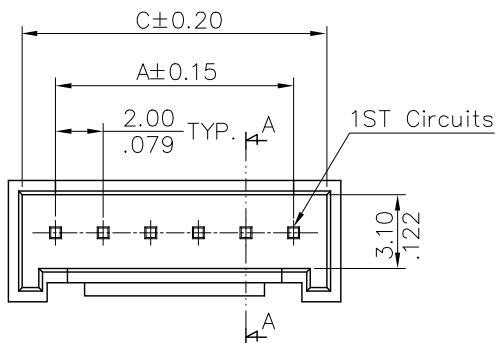

Note:

1. Material:

* Base:

High Temperature Polyamide

UL 94V-0 Color Nature

* Contact: Brass

△ 2. For Tin-Lead Wave flow Process

Ordering Code:

CI06 ** P 1 V 0 0
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② No. of circuits

③ Contact type: P= Pin Header

④ Plating option:

1= 3.05μm (120μ") Tin



over 0.76μm(30μ") Nickel

⑤ Type: V= Straight Type

⑥ Other option: 0= Standard

⑦ Process option:

For Tin-Lead Wave flow Process

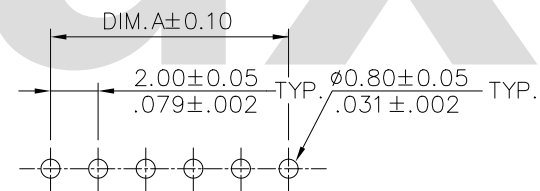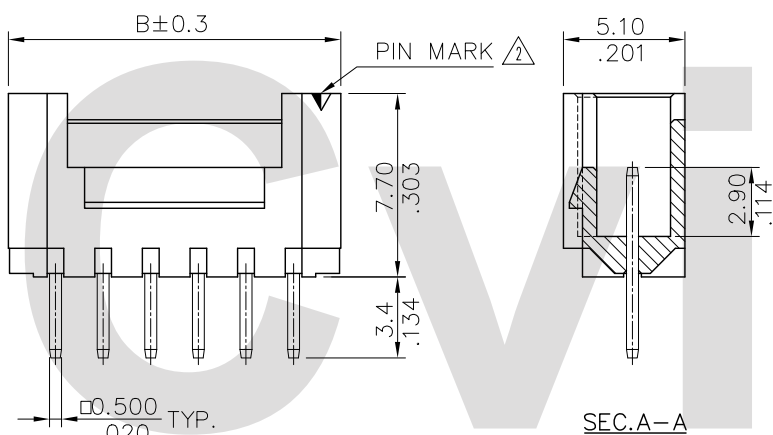

△ A = 2.0 x No. of Spaces

B = A + 3.96

C = A + 2.8

* Available in 2 through 16 circuits

Recommended P.C. Board Layout

Tin-Lead Process

RoHS Compliant

△ 4				CIVILUX CORP		DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation			
△ 3	Enya	3/8-13'	ECN13056-0/ECR13007-1	2013.05.07	DRAWN BY: Enya	3/08-13'	TOLERANCE UNLESS OTHERWISE SPECIFIED	2.00mm PIN HEADER DIP TYPE				
△ 2	Tim	11/09-10'	ECR10145-0/ECN10364	ISSUED	ENGINEER: Eisley	3/09-13'	.X ± 0.30/.012 X' ± 1'	MATERIAL:	DRAWING NO.	CI0602SD	PART NO.	CI06**P1V00
△ 1	Sandy	9/27-07'	ECN07402		CHECKED BY: Eisley	3/09-13'	.XX ± 0.20/.008	FINISH:	SCALE	3 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS		APPROVED BY: David	3/09-13'	.XXX ± 0.10/.004 XX' ±					