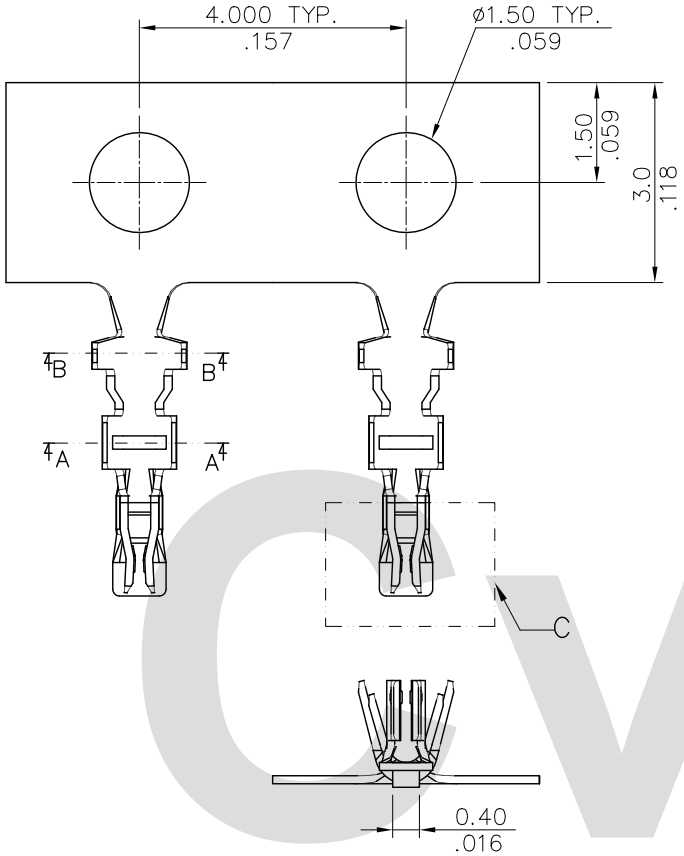

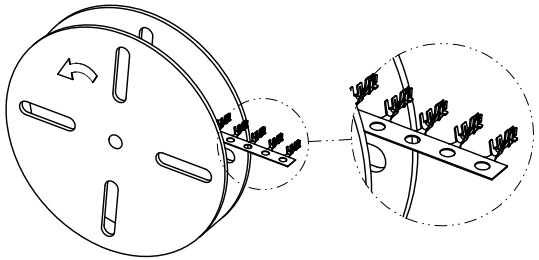

電鍍後捲料方向

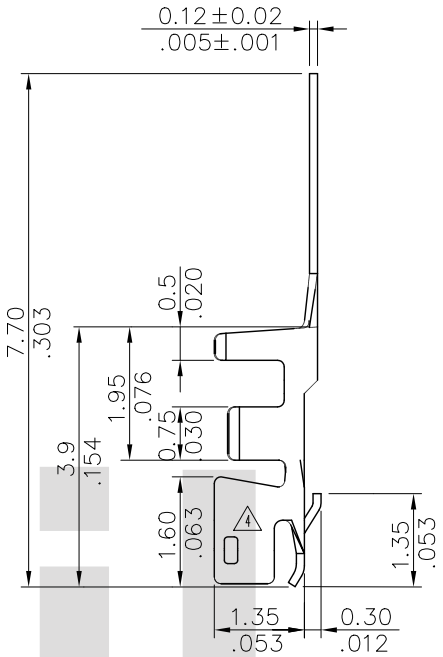



SEC. A–A
SCALE 10/1



SEC. B–B
SCALE 10/1

Wire Range	Insulation Diameter	Reel Q'ty
AWG #28~#32	0.4~0.8(mm)	16,000 PCS.

Ordering Code:

CI11 T01 * P P 0
① ② ③ ④ ⑤ ⑥

① Series No.
② Type: T01= AWG #28~ #32
△3 ③ Plating: 1= 2.03μm(80μ") Min. Tin over 0.76μm(30μ") Nickel
2= Gold Flash plated over 1.27μm(50μ") Nickel
④ Material: P= Phosphor Bronze
⑤ Plating method: P= Post plating
⑥ Option: 0= Standard



DETAIL C
SCALE: 15/1

RoHS Compliant

SYM	NAME	DATE	REVISIONS
△7	Enya	8/14-13'	ECNT113038
△6	Hank	2/25/09'	ECN09081
△5	Sandy	8/22-07'	ECN07330/ECR07047-2
△4	Clark	10/2/06'	ECN06302

CVILUX CORP
2013.08.28
ISSUED

		DATE
DRAWN BY:	Enya	8/14-13'
ENGINEER:	Eisley	8/14-13'
CHECKED BY:	Eisley	8/14-13'
APPROVED BY:	David	8/14-13'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.30/.012	X.° ± 1°
.XX ± 0.20/.008	.X° ±
.XXX ± 0.10/.004	.XX° ±

TITLE: FOR CI11 SERIES CRIMP TERMINAL

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CI1105SH	PART NO.	CI11T01*PP0
SCALE	7 / 1	SHEET	1 OF 1