

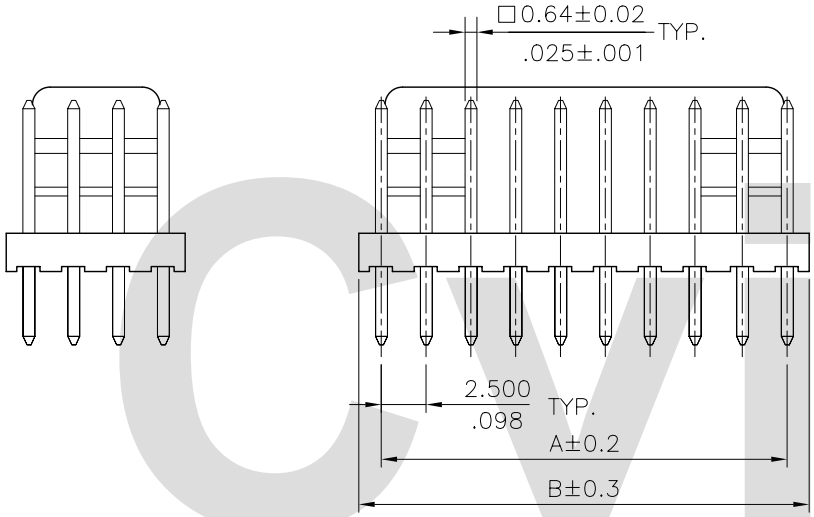

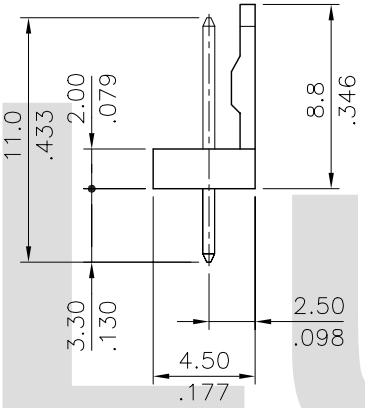

Material:

* Insulation: Nylon 66 UL 94V-2
* Contact: Brass

Ordering Code:

CI23	**	P	1	V	0	0
①	②	③	④	⑤	⑥	⑦

① Series No.
② No. of Circuits
③ Contact type: P= Pin header
④ Plating option:
1= 3.05μm(120μ") Min. Tin over 0.76μm(30μ") Nickel
2= Gold flash plated over 1.27μm(50μ") Nickel
⑤ Tail Style: V= Straight
⑥ Color: 0= Nature, 5= Yellow
⑦ Option: 0= Standard

△1 2 THROUGH 5 CIRCUITS

△1 6 THROUGH 12 CIRCUITS

A = 2.5 x No. of Spaces
B = A + 2.5

* Available in 2 through 12 circuits



Recommended P.C. Board Layout

RoHS Compliant

SYM	NAME	DATE	REVISIONS
4			
3			
2	Sandy	12/21/06'	ECN06487
1	Jim	5/17/06'	ECR06036-0/ECN06143

CVILUX.CORP 2006.12.22 ISSUED

		DATE
DRAWN BY:	Sandy	12/21-06'
ENGINEER:	Eisley	12/22-06'
CHECKED BY:	David	12/22-06'
APPROVED BY:	Alex	12/22-06'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.30/.012	X.° ± 1°
.XX ± 0.20/.008	.X° ±
.XXX ± 0.10/.004	.XX° ±

TITLE: 2.50MM(.098") STRAIGHT HEADERS

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CI2302SD	PART NO.	CI23**P*V*0
SCALE	2 / 1	SHEET 1 OF 1	