


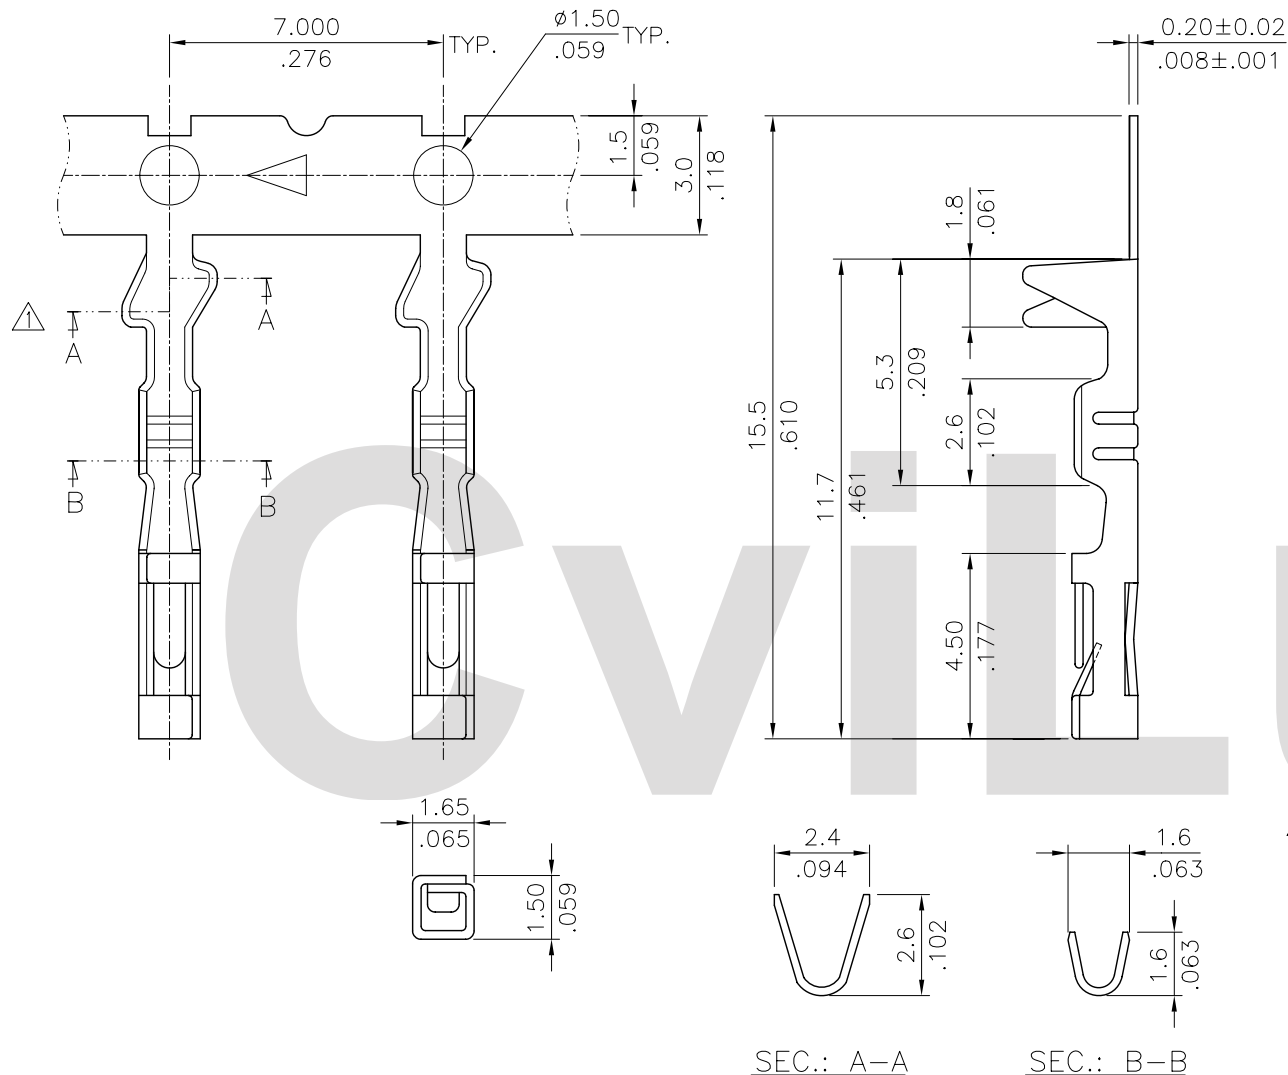

Wire Range	Insulation Diameter	Reel Q'ty
AWG #22~#28	1.70 (.067) MAX.	10,000 PCS.

Ordering Code :

CI32 T02 1 B E 0
① ② ③ ④ ⑤ ⑥

① Series No.

② Type: T02= AWG #22~#28

③ Plating:

1= Tin plated over 1.27 μ m(50 μ ") Nickel

2= Gold flash plated over Nickel

A= Selective Gold flash plated over Nickel

B= Selective 0.38 μ m(15 μ ") Gold plated over 1.27 μ m(50 μ ") Nickel

C= Selective 0.76 μ m(30 μ ") Gold plated over 1.27 μ m(50 μ ") Nickel

④ Material: B= Brass, P= Phosphor Bronze

⑤ Plating method: E= Pre-tinned
P= Post plating

⑥ Single contact withdrawal force:

0= Suggest to use this with housing over 20 positions (130~220 gram)

M= Suggest to use this with housing under 21 positions (300~400 gram)

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/27-05'	UNIT: mm / inch	TITLE:	CRIMP TERMINAL	DRAWING NO.	CI3203SK	PART NO.	CI32T02****
4	Sun	10/25/05"	ECN05362	ENGINEER:	Eisley	10/26-05'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
3	Eisley	6/16/05"	ECN05214	CHECKED BY:	David	10/26-05'	.X $\pm$ 0.20/.008	X* $\pm$ 1'					
2	SUN	11/4/03"	ECN03385	APPROVED BY:	Alex	10/27-05'	.XX $\pm$ 0.10/.004	.X* $\pm$					
1							.XXX $\pm$ 0.05/.002	.XX* $\pm$					

CVILUX.CORP
2005.10.27
ISSUED



瀚荃股份有限公司
CviLux Corporation

SCALE	6 / 1	SHEET	1 OF 1
-------	-------	-------	--------