



For 4 Through 12 Circuits



For 3 Circuits



For 2 Circuits

Material:

* Insulation: Glass filled polyester UL 94V-0

* Contact: Brass

Ordering Code:

CI33 ** P 1 V 1 0
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② No. of Circuits

③ Contact type: P= Pin header

④ Plating option:

1= 3.05μm(120μ") Min. Tin
over 0.76μm(30μ") Nickel

2= Gold flash plated over
1.27μm(50μ") Nickel




3= 0.38μm(15μ") Gold plated
over 1.27μm(50μ") Nickel

4= 0.76μm(30μ") Gold plated
over 1.27μm(50μ") Nickel

⑤ Tail Style: V= Straight

⑥ Color: 1= Black

⑦ Option:

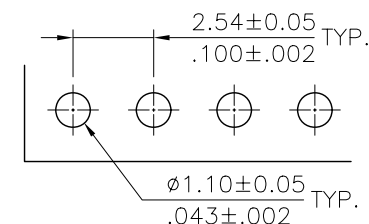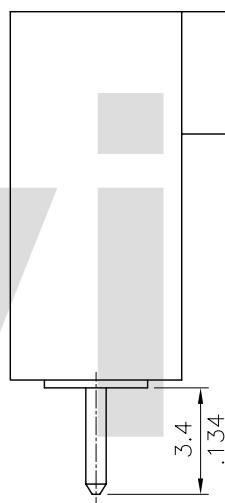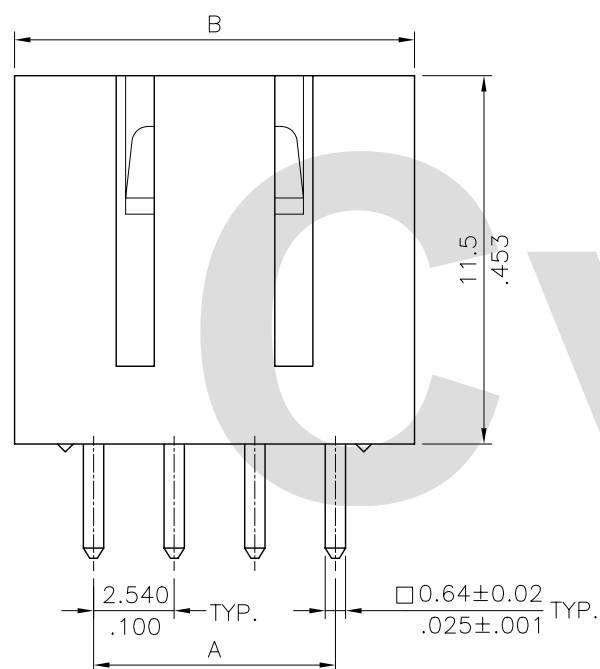

A = 2.54 x No. of Spaces

B = A + 5.1

C = A + 2.98

* Available in 2 through 18 circuits

Recommended P.C. Board Layout

RoHS Compliant

4				CVILUX.CORP 2002.07.30 ISSUED			DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") STRAIGHT PIN HEADER	瀚荃股份有限公司 CviLux Corporation		
3					DRAWN BY: Eisley	07/29-02'	TOLERANCE UNLESS OTHERWISE SPECIFIED .X ± 0.30/.012 X' ± 1'		MATERIAL:		DRAWING NO. CI3303SE	PART NO. CI33**P*V10
2					ENGINEER: David	07/29-02'						
1					CHECKED BY: David	07/29-02'	.XX ± 0.20/.008 X' ±		FINISH:		SCALE	4 / 1
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	07/30-02'	.XXX ± 0.10/.004 XX' ±						