


Material:


* Insulation: PBT UL 94V-0, Color Black

* Without polarizing rib --- P/N: CI33**SOD10


* With Polarizing rib ----- P/N: CI33**SOD1A

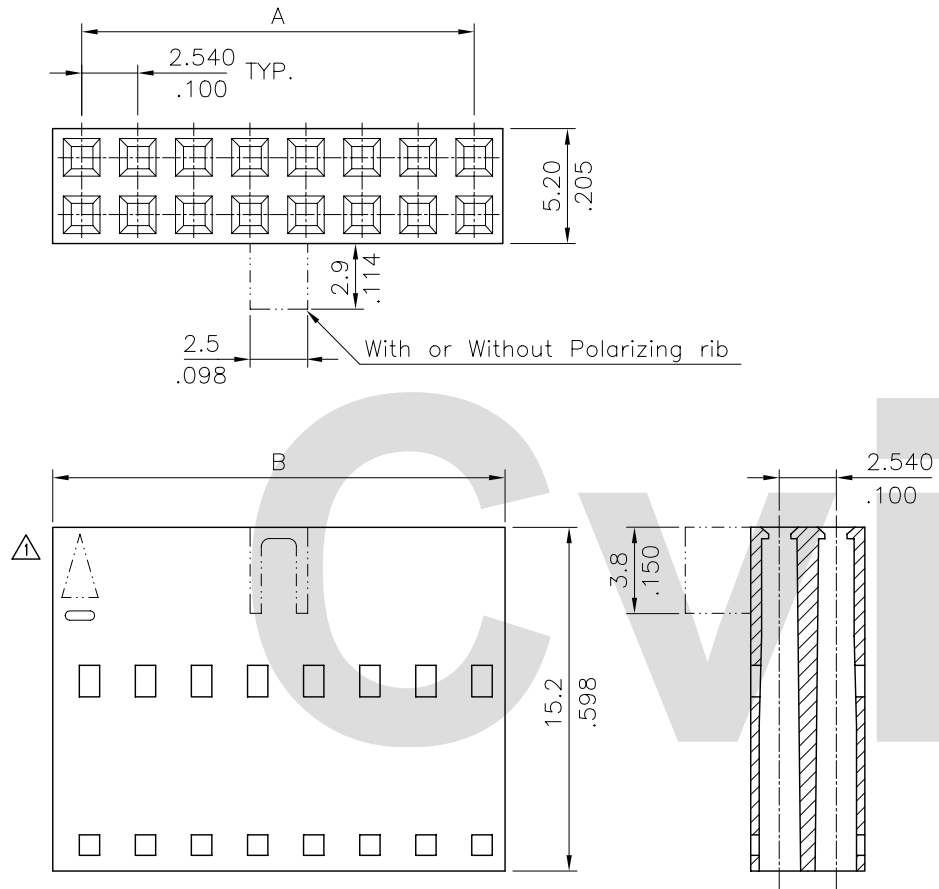

Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
4	2.54(.100)	5.2(.205)	34	40.64(1.600)	43.3(1.705)
6	5.08(.200)	7.7(.303)	36	43.18(1.700)	45.9(1.807)
8	7.62(.300)	10.3(.406)	38	45.72(1.800)	48.4(1.906)
10	10.16(.400)	12.8(.504)	40	48.26(1.900)	50.9(2.004)
12	12.70(.500)	15.4(.606)	42	50.80(2.000)	53.5(2.106)
14	15.24(.600)	17.9(.705)	44	53.34(2.100)	56.0(2.205)
16	17.78(.700)	20.5(.807)	46	55.88(2.200)	58.6(2.307)
18	20.32(.800)	23.0(.906)	48	58.42(2.300)	61.1(2.406)
20	22.86(.900)	25.5(1.004)	50	60.96(2.400)	63.6(2.504)
22	25.40(1.000)	28.1(1.106)	52	63.50(2.500)	66.2(2.606)
24	27.94(1.100)	30.6(1.205)	54	66.04(2.600)	68.7(2.705)
26	30.48(1.200)	33.2(1.307)	56	68.58(2.700)	71.3(2.807)
28	33.02(1.300)	35.7(1.406)	58	71.12(2.800)	73.8(2.906)
30	35.56(1.400)	38.2(1.504)	60	73.66(2.900)	76.3(3.006)
32	38.10(1.500)	40.8(1.606)			



△ P/N:CI33**SOD10



△ P/N:CI33**SOD1A

RoHS Compliant

4																			
3																			
2																			
1	Karen	2/18-09'	ECN09067/ECR09010-0																
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	2/19-09'													

2009.02.24
ISSUED

UNIT:	mm / inch	TITLE:	2.54MM(.100")
TOLERANCE UNLESS OTHERWISE SPECIFIED		DUAL ROW CRIMP TERMINAL HOUSING	
.X ± 0.30/012	X' ± 1"	MATERIAL:	
.XX ± 0.20/008	.X' ±	FINISH:	
.XXX ± 0.10/004	.XX' ±		

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CI3305SB	PART NO.	CI33**SOD1*
SCALE	3 / 1	SHEET	1 OF 1