Material:
Nylon 66 UL 94V-2
Color Nature

Ordering Code:

CI51 ** S 000M
① ② ③ ④

① Series No.
② No. of Circuits
③ S=Connector housing
④ Other option: 000M= Standard
(Glow wire available)

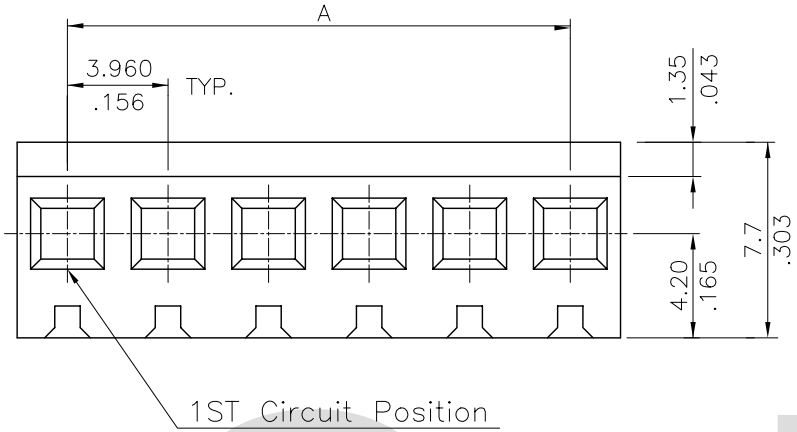

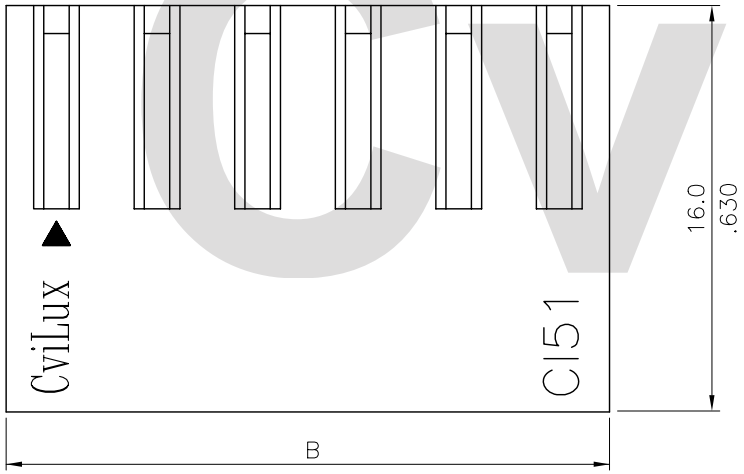

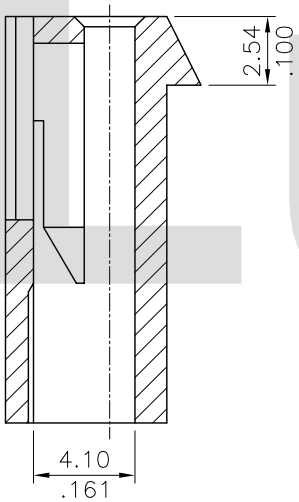

Circuits	Dimension	
	A	B
2	3.96(.156)	8.0(.315)
3	7.92(.312)	12.0(.472)
4	11.88(.468)	15.9(.626)
5	15.84(.624)	19.9(.783)
6	19.80(.780)	23.9(.941)
7	23.76(.935)	28.0(1.102)
8	27.72(1.091)	32.0(1.260)
9	31.68(1.247)	35.9(1.413)
10	35.64(1.403)	39.9(1.571)
11	39.60(1.559)	43.9(1.728)
12	43.56(1.715)	47.8(1.882)
13	47.52(1.871)	51.8(2.039)
14	51.48(2.027)	55.7(2.193)
15	55.44(2.183)	59.7(2.350)
16	59.40(2.339)	63.7(2.508)
17	63.36(2.494)	67.6(2.661)
18	67.32(2.650)	71.6(2.819)
19	71.28(2.806)	75.5(2.972)
20	75.24(2.962)	79.5(3.130)

RoHS Compliant

CviLux

SYM	NAME	DATE	REVISIONS
4			
3			
2			
1			

CVILUX CORP.
2007.07.18
ISSUED

		DATE
DRAWN BY:	Sandy	7/10-07'
ENGINEER:	Eisley	7/13-07'
CHECKED BY:	David	7/13-07'
APPROVED BY:	Alex	7/13-07'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.38/.015	X.° ± 1°
.XX ± 0.25/.010	.X° ±
.XXX ± 0.10/.004	.XX° ±

TITLE: 3.96MM(.156")
CRIMP TERMINAL HOUSING

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CI5144SA	PART NO.	CI51**S000M
SCALE	2 / 1	SHEET 1 OF 1	