


CONTACT ORIENTATION
ON REEL FOR AUTO
CRIMP MACHINE

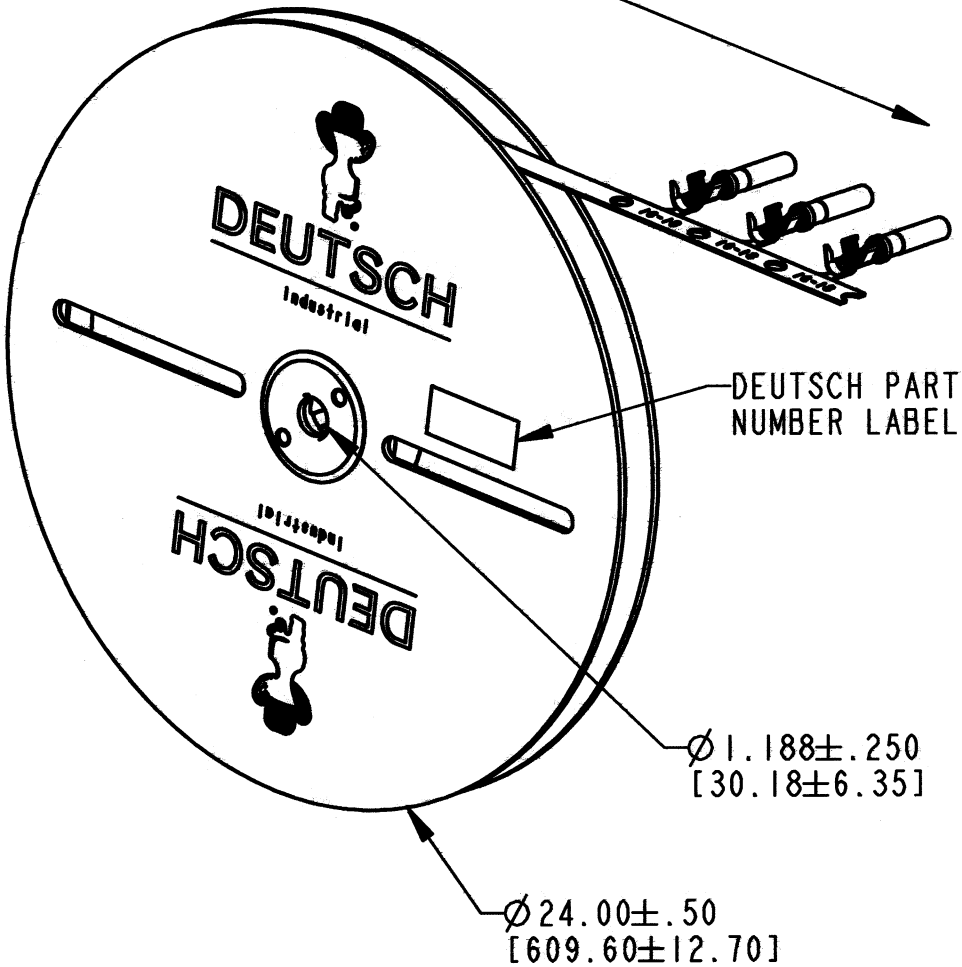


REV
D


1062-16-09 **

REVISIONS


SYM	DESCRIPTION	DATE	APPROVED
A	REVISED PER E.O. P16997	12-08-00	R.D.R.
B	REVISED PER E.O. P19555	7-11-07	R.D.R.
C	REVISED PER E.O. P20396	6-25-10	R.D.R.
D	REVISED PER E.O. P21266	1-10-12	RDR

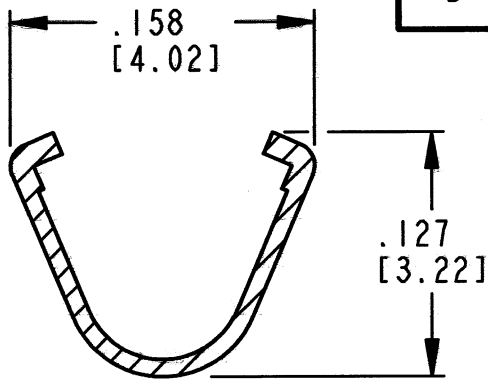

SECTION A-A
CONDUCTOR WINGS

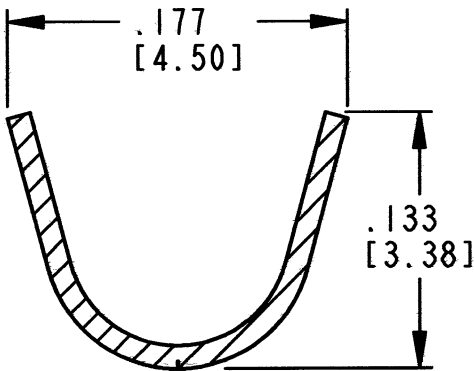

SECTION B-B
INSULATION WINGS

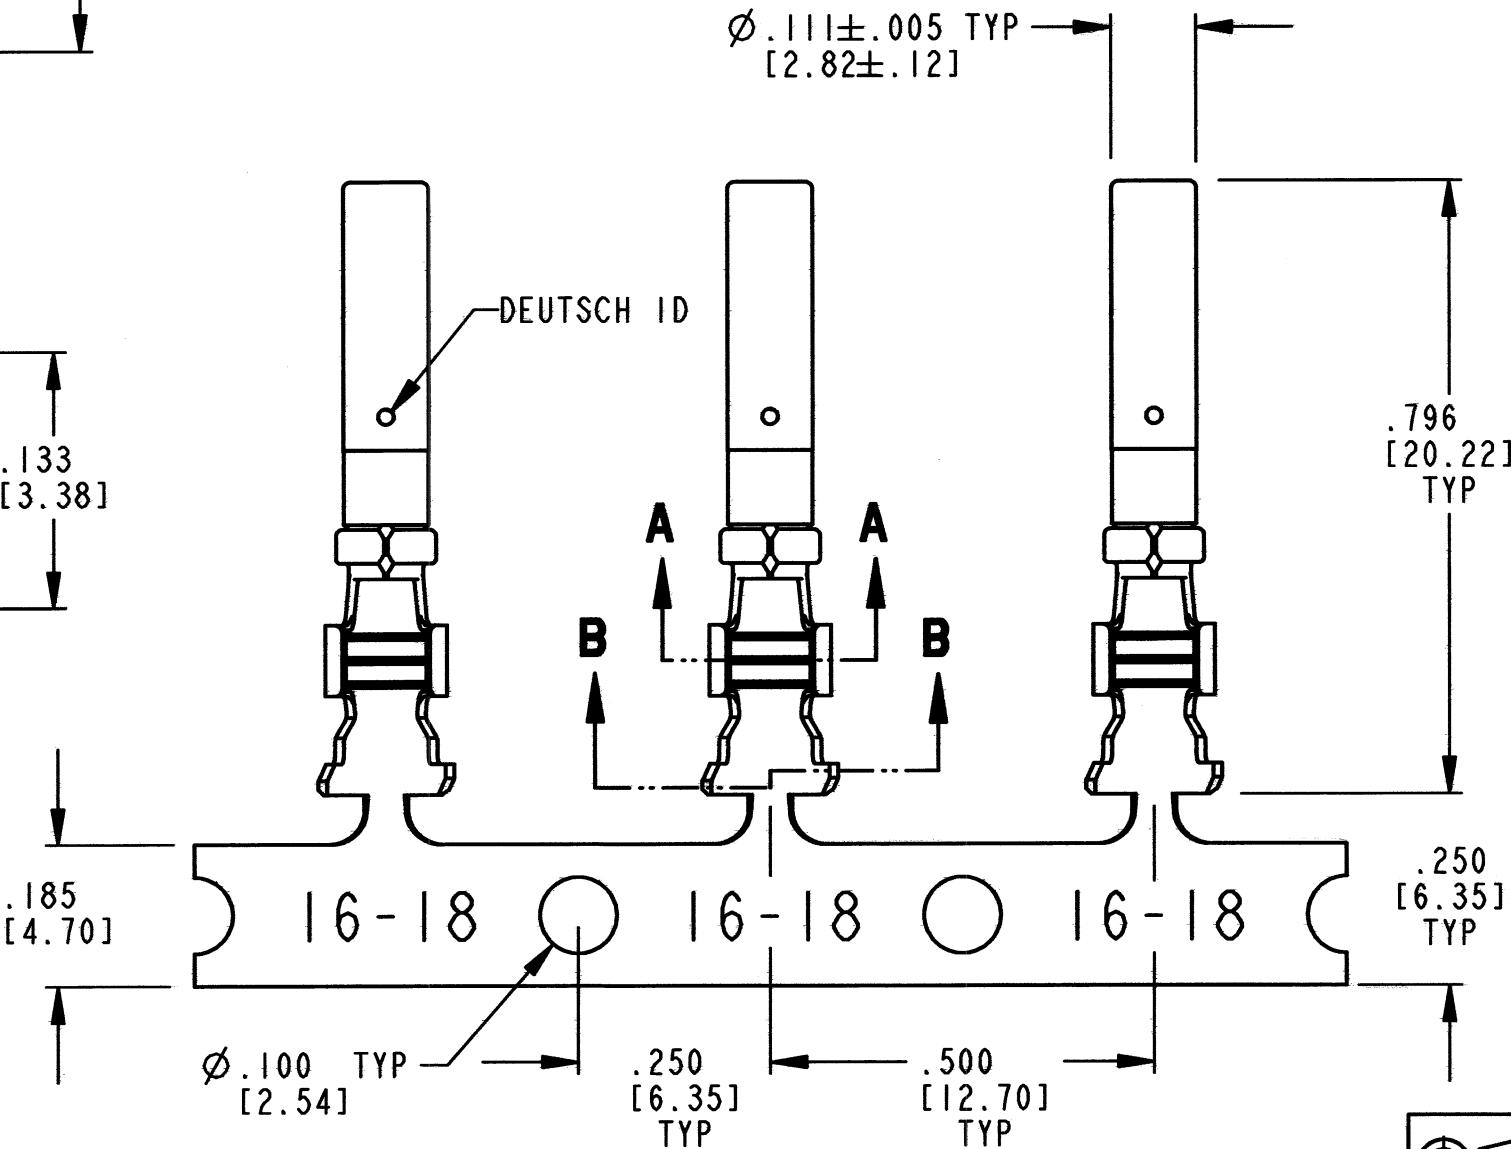

- CONTACT BODY MATERIAL: COPPER ALLOY;
CONTACT SLEEVE MATERIAL: STAINLESS STEEL.
- WHEN ** = 77 PLATING IS TIN.
** = 88 PLATING IS SELECTIVE GOLD.
- SEE 0425-015-0000 FOR CONTACT PERFORMANCE AND
WIRE APPLICATION CHARACTERISTICS.
- THIS CONTACT MAY BE CRIMPED WITH DCT16-02-00 AUTOMATIC
DIE, DTT-16-00 OR DTT-16-01 HAND TOOLS. SEE DRAWING
0425-203-0000 FOR APPLICABLE WIRE SIZE, INSULATION
DIAMETER RANGE, AND CRIMPING INFORMATION.
- ONE REEL CONTAINS APPROXIMATELY 4000 CONTACTS.
- DIMENSIONAL TOLERANCE: $\pm .025$ [0.63].
- DIMENSIONS ARE IN INCHES [mm].

NOTES: UNLESS OTHERWISE SPECIFIED

SIGNATURE & DATE	
DR	J. APOSTOL 03DEC2009
CHK	D. Meyer 1/10/12
PE	D. Meyer 1/10/12
APPD	R. Red 1-10-12
SCALE	NONE
WT	

STAMPED CONTACT
SOCKET
SIZE 16

ENVELOPE

EP	MATL. CODE
3850 INDUSTRIAL AVE. HEMET, CA 92545	
DEUTSCH INDUSTRIAL	
B	1062-16-09 **
DWG SIZE	CODE 11139
SHEET	OF