

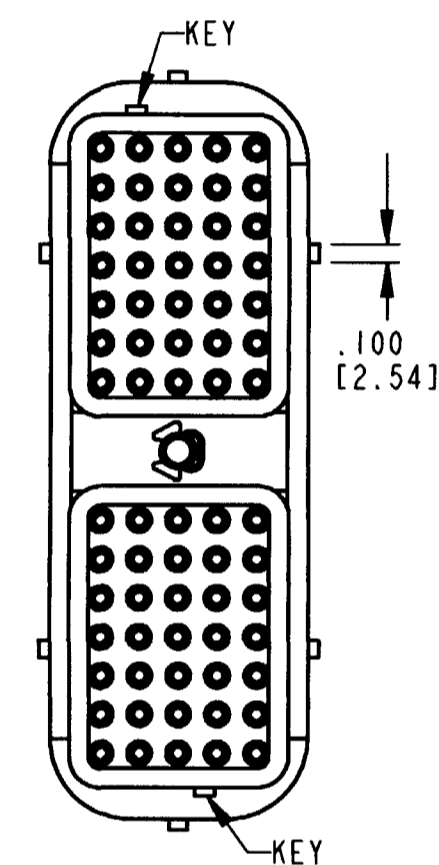


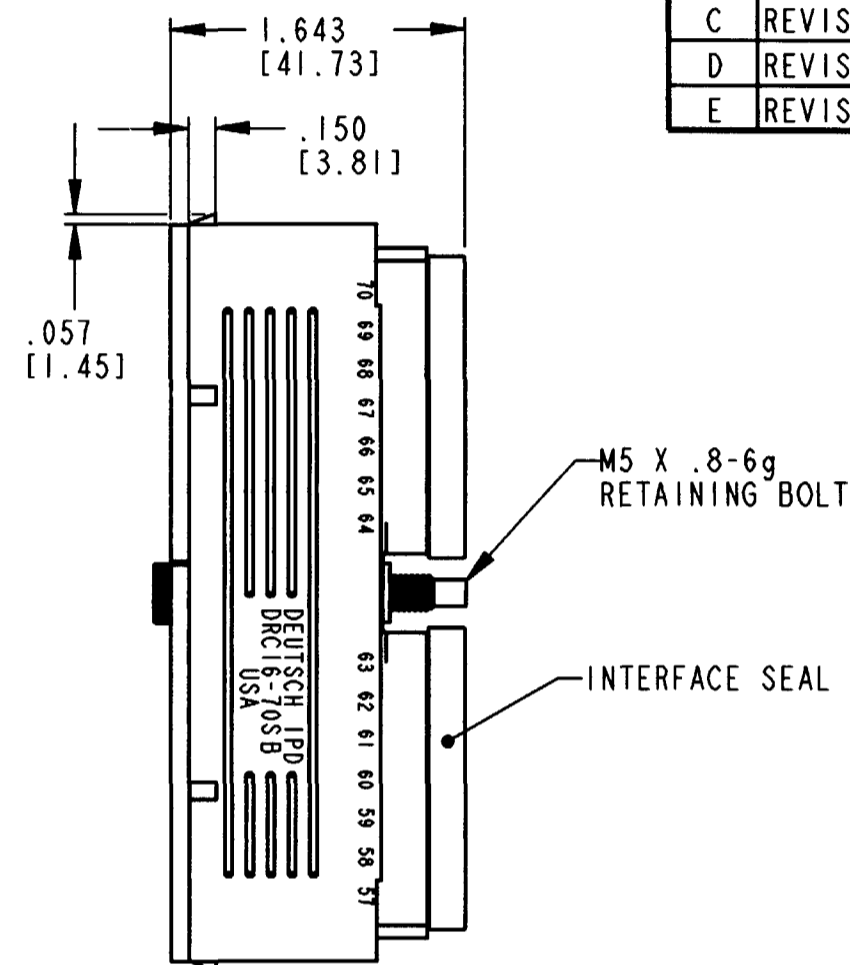

REV E	DRC16-70SB *
----------	---------------------

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVE
B	REVISED PER E.O. PI5967	03/23/99	RDR
C	REVISED PER E.O. PI6064	04/20/99	RDR
D	REVISED PER E.O. PI6775	7-27-00	RDR
E	REVISED PER E.O. PI7732	4-15-02	RDR

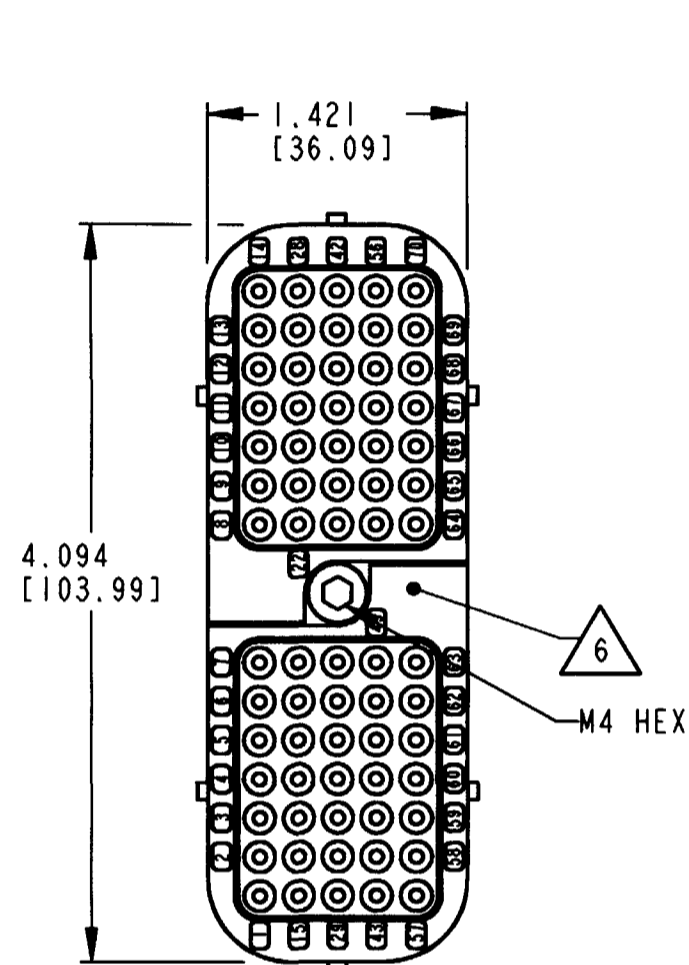


8. MATERIAL- PLUG: PLASTIC (BLACK); SEAL/GROMMET: RUBBER; BOLT/CLIP: STEEL.
7. MATING TORQUE REQUIREMENT: 25-28 IN-LB [2.82-3.16 Nm].
6. WHEN *-E: BLUE STRIP IDENTIFIES "E" SEAL.
5. THIS PLUG MATES WITH DRC12-70PB*-****; DRC13-70PB-****; DRC14-70PB*-****.
(****= ALL MODIFICATIONS) CONSULT FACTORY FOR MODS.
4. FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS,
SEE ENVELOPE DRAWING 0425-015-0000.
3. PLUG IS SUPPLIED WITH DUST CAP (NOT SHOWN).
2. DIMENSION TOLERANCE: $\pm .025$ [.635].
1. DIMENSIONS ARE IN INCHES [mm].

 SEAL TYPE	CONTACT SIZE	MIN. INSUL. OD [mm]	MAX. INSUL. OD [mm]	WIRE RANGE [mm ²] REF ONLY 
NORMAL	16	.100 [2.540]	.134 [3.404]	14-18 AWG [2.0-.75]
E	16	.053 [1.346]	.120 [3.048]	14-20 AWG [2.0-.50]

		SIGNATURE & DATE	
DR		D. MEYER	03/15/99
CHK		<i>[Signature]</i>	4/15/02
PE		<i>[Signature]</i>	4/15/02
APPD		<i>[Signature]</i>	4-15-02
SCALE	•	WT	

PLUG CONNECTOR
DRC 70 SERIES
KEY ARRANGEMENT -B-

ENVELOPE

CP	MATL. CODE		
The Deutsch Company  DEUTSCH I.P.D. 3850 INDUSTRIAL AVE. HEMET, CALIF. 92545			
B	DRC16-70SB *		
	DWG	CODE	SHEET OF