

2014

RELEASED FOR PUBLICATION


ALL RIGHTS RESERVED.

COPYRIGHT 2014 BY TE CONNECTIVITY

THIS DRAWING IS UNPUBLISHED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE PER ECO-14-009836	07-01-14	DM	DM

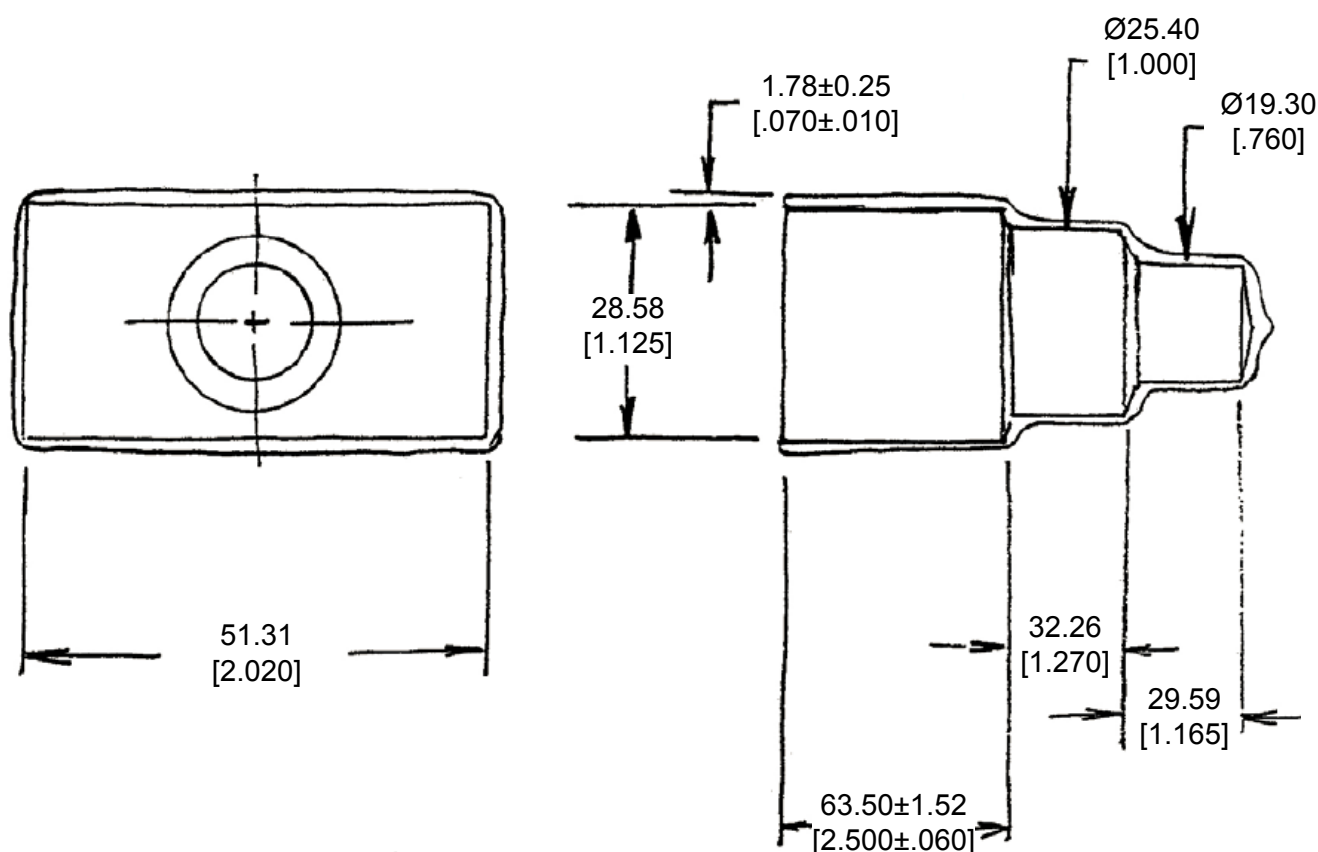

3. PART NO. DRC24-BT-YW

2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]

1. THIS PART IS USED ON
 DRC12-24PX(E)-XXXX RECEPTACLE
 DRC14-24PX(E)-XXXX RECEPTACLE
 DRC16-24SX(E)-XXXX PLUG
 WHERE X=A,B,C,D KEYS AND XXXX=MODIFICATION

DIMENSIONS: MM [INCH]	DWN	D. MEYER 01JUL2014	MATERIAL	PVC	FINISH	YELLOW				
	CHK	D. HASIBUAN 01JUL2014	 TE Connectivity							
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	D. MEYER 01JUL2014								
0 PLC ±	PRODUCT SPEC	NAME BOOT, 24PIN DRC SERIES								
1 PLC ±	APPLICATION SPEC									
2 PLC ± 0.63 [.025]	WEIGHT	37.50 G	SIZE	A 4	CAGE CODE	4AFU8	DRAWING NO	C - DRC24-BT-YW	RESTRICTED TO	-
3 PLC ±	Customer Drawing		SCALE	NONE	SHEET	1	OF	1	REV	A
4 PLC ±										
ANGLES ± 5°										