

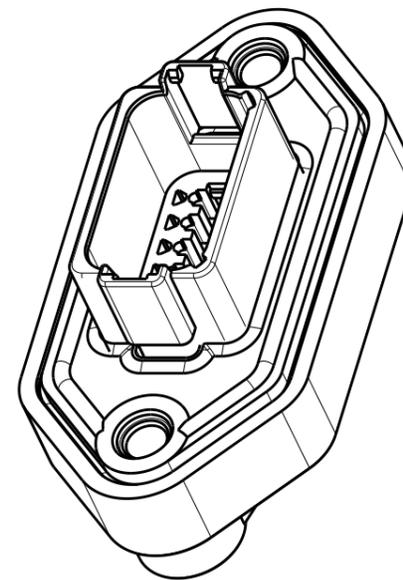


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	NC	NEW RELEASE PER E.O. P15865	10 MAR1999	JA	RDR
	A	REVISED PER ECO-14-012761	19AUG2014	JA	DM

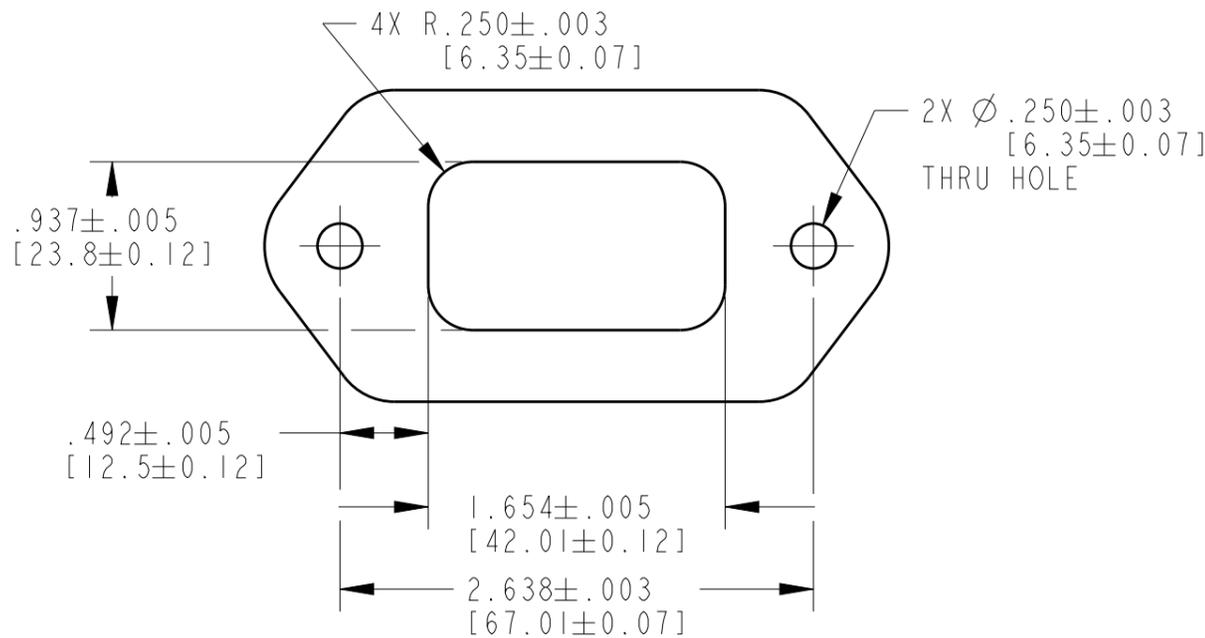


CONTACT SIZE	MIN. INSUL O.D.	MAX. INSUL O.D.	WIRE RANGE [mm <sup>2</sup> ] REF ONLY
16	.088 [2.24]	.145 [3.68]	14-20 AWG [2.0-0.5]

**RECOMMENDED MOUNTING DETAIL**

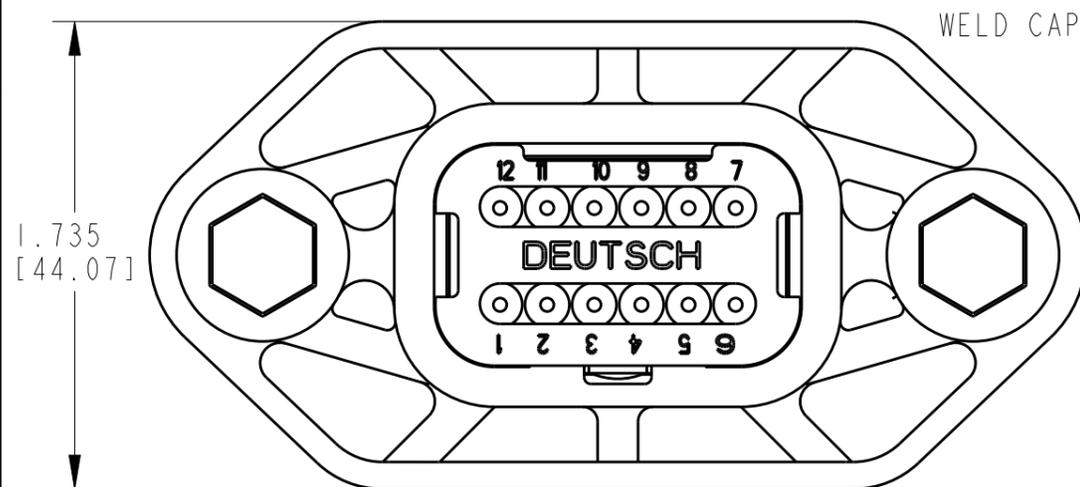


WELD CAP

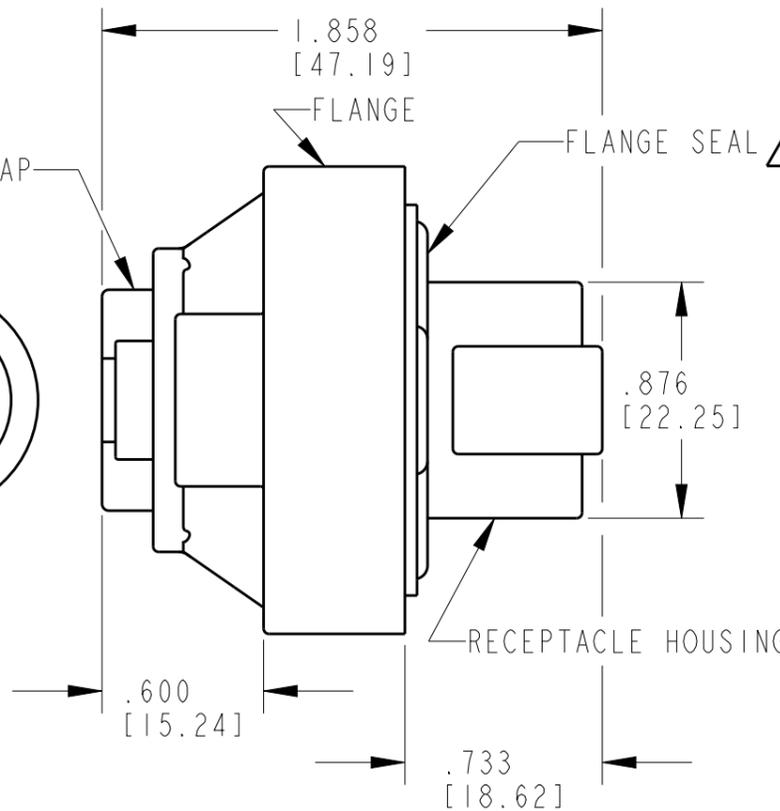

DATE CODE: MONTH IS REPRESENTED BY SEQUENTIAL ALPHA CHARACTERS. EX: A = JANUARY, YEAR IS REPRESENTED BY LAST NUMERICAL DIGIT. EX: 0 = 2010

2X THREADED INSERT M6 X .500 [12.70]

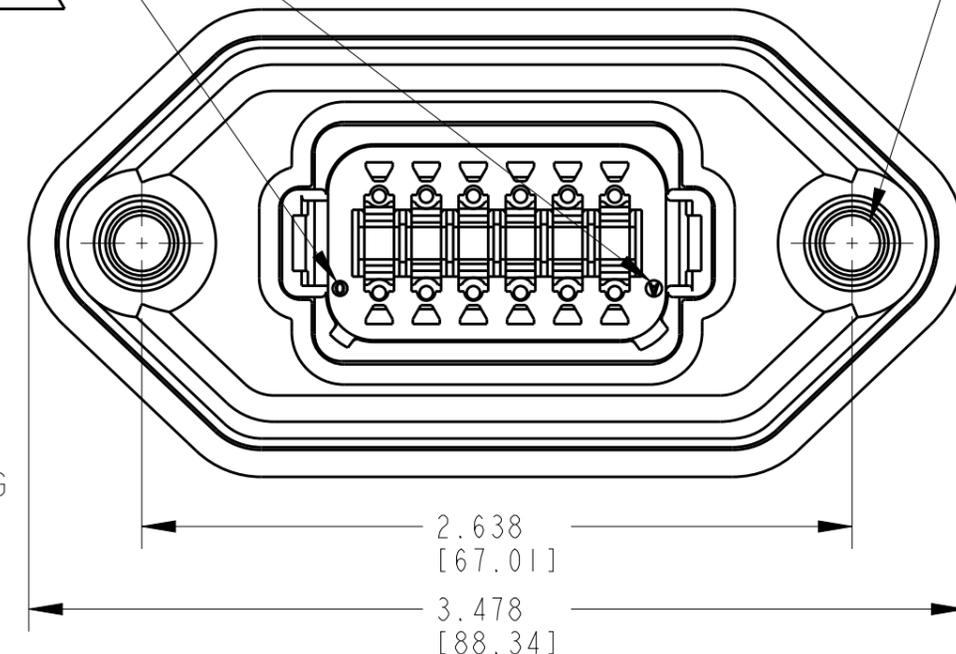

- △ 4 FLANGE SEAL IS INTENDED FOR NON-PRESSURIZED OIL SPLASH ONLY.
- 3. CONNECTOR MATERIAL IS PLASTIC, COLOR IS BLACK; SEAL & GASKET ARE RUBBER; INSERT IS STAINLESS STEEL

2. THIS RECEPTACLE MATES WITH DT06-12SA-XXXX PLUG. (XXXX = ALL MODIFICATIONS) CONSULT FACTORY FOR MODIFICATIONS.

△ 1 FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS, SEE ENVELOPE DRAWINGS 0425-015-0000 AND 0425-017-0000.

NOTES: UNLESS OTHERWISE SPECIFIED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 12AUG2014 JAIME C. APOSTOL			
DIMENSIONS: INCHES [mm]		CHK 19AUG2014 RUSSELL MESSENGER			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 19AUG2014 DAVID MEYER		NAME 12 WAY RECEPTACLE WITH FLANGE -LE10 MOD DT SERIES	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.025 [.64] 4 PLC ± ANGLES ±0°30'0"		PRODUCT SPEC		SIZE A3	
MATERIAL		APPLICATION SPEC		CAGE CODE 4AFU8	
FINISH		WEIGHT 89.17g		DRAWING NO. DT04-12PA-LE10	
		CUSTOMER DRAWING		RESTRICTED TO	
		SCALE 1.5		SHEET 1 OF 1	
				REV A	