THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2014
© COPYRIGHT 2013 BY TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER E.O. A11201	29OCT1991		JA
	C	REVISED PER E.O. P17106	15FEB2001	PB	RDR
	D	REVISED PER E.O. P19169	14JUL2006	KM	RDR
	D1	REVISED PER ECO-14-015954	27OCT2014	JA	DM

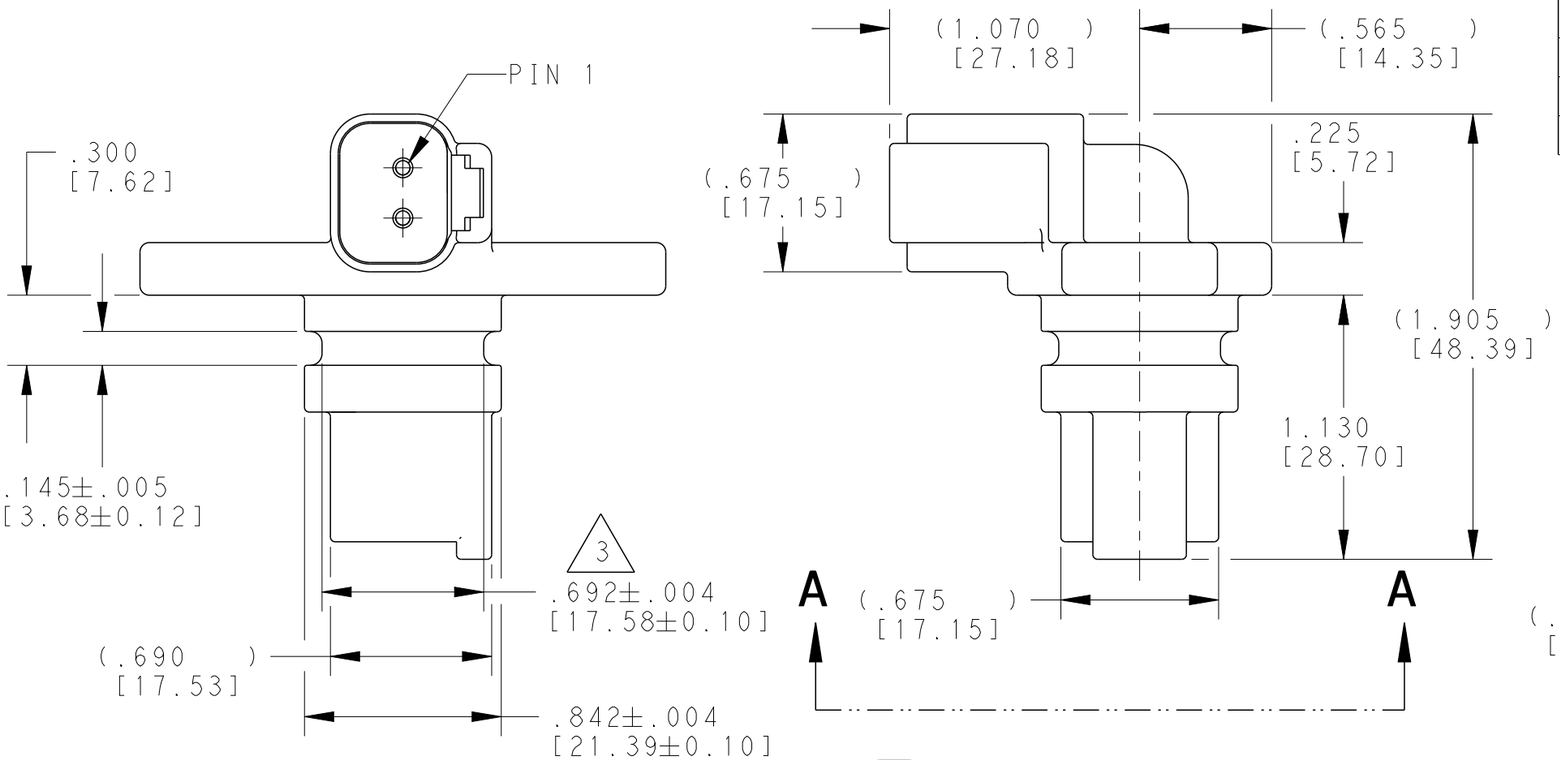



(ELECTRICAL)

SCHEMATIC SYMBOL

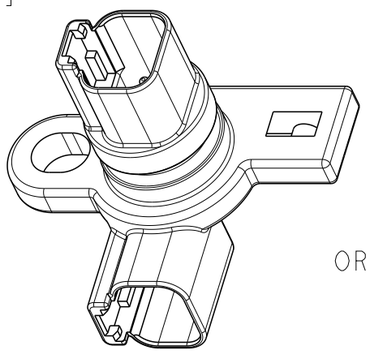

3D VIEW

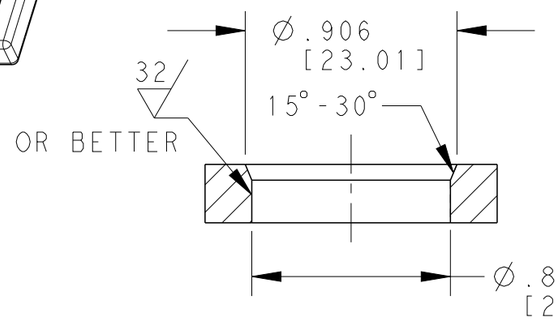

RECOMMENDED CUTOUT

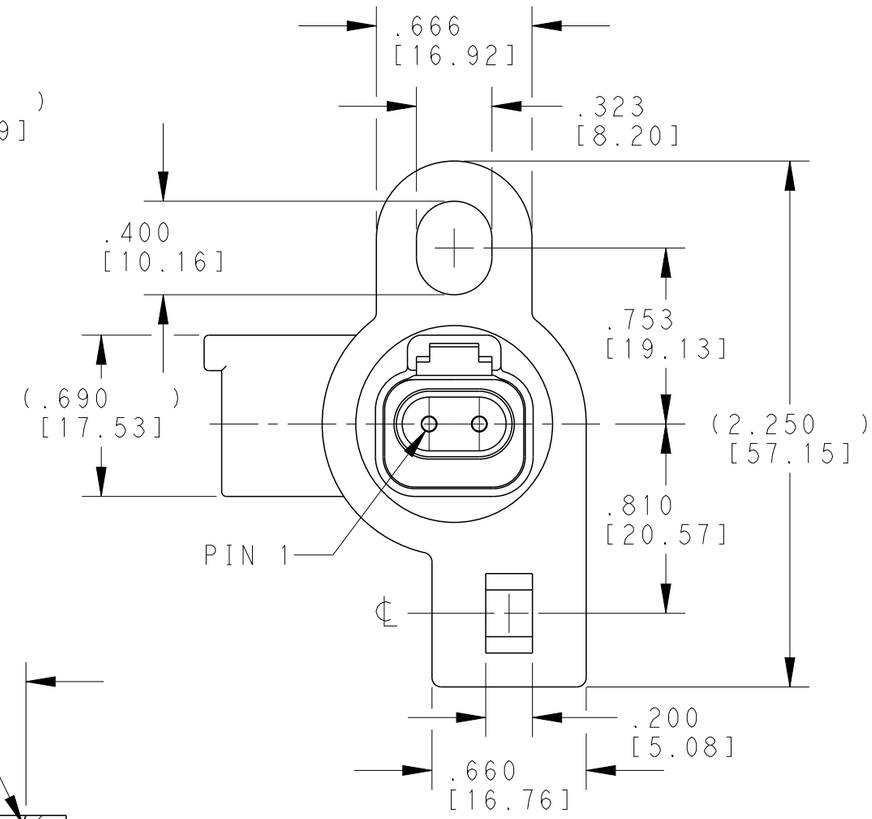

VIEW A-A

TE INTERNAL PN	DEUTCH PN
DT04-2P-N006	DT04-2P-N006

4. RECOMMENDED SCREW: 5/16 [M8].
TORQUE: 79.66-132.76 in-lb [9.00-15.00 Nm].

△3 RECOMMENDED CROSS SECTION OF O-RING (CUSTOMER SUPPLIED) NOMINAL Ø.103 [2.62], AS568-115

2. THIS RECEPTACLE MATES WITH DT06-2S-XXXX PLUG (XXXX = ALL MODIFICATIONS.)

△1 MATERIAL: HOUSING: PEI BLACK;
CONTACTS: COPPER ALLOY,
NICKEL OVER COPPER
INTERNAL SEAL: VMQ

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES[mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±.010 [.25]
4 PLC ±
ANGLES ±0°30'0"

MATERIAL △1
FINISH △1

DWN JAIME C. APOSTOL 27OCT2014
CHK KEVIN MCKEE 27OCT2014
APVD DAVID MEYER 27OCT2014
PRODUCT SPEC 0425-017-0000
APPLICATION SPEC 0425-017-0000
WEIGHT 15.53g

TE Connectivity

NAME RECEPTACLE, DOUBLE 90 DEGREES, DT 2 PIN DT SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	4AFU8	C-DT04-2P-N006	-

Customer Drawing | SCALE 3:2 | SHEET 1 OF 1 | REV D1