

2014

RELEASED FOR PUBLICATION


ALL RIGHTS RESERVED.

COPYRIGHT 2014 BY TE CONNECTIVITY

THIS DRAWING IS UNPUBLISHED.

## REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE PER ECO-14-012863	08-27-14	DM	DM

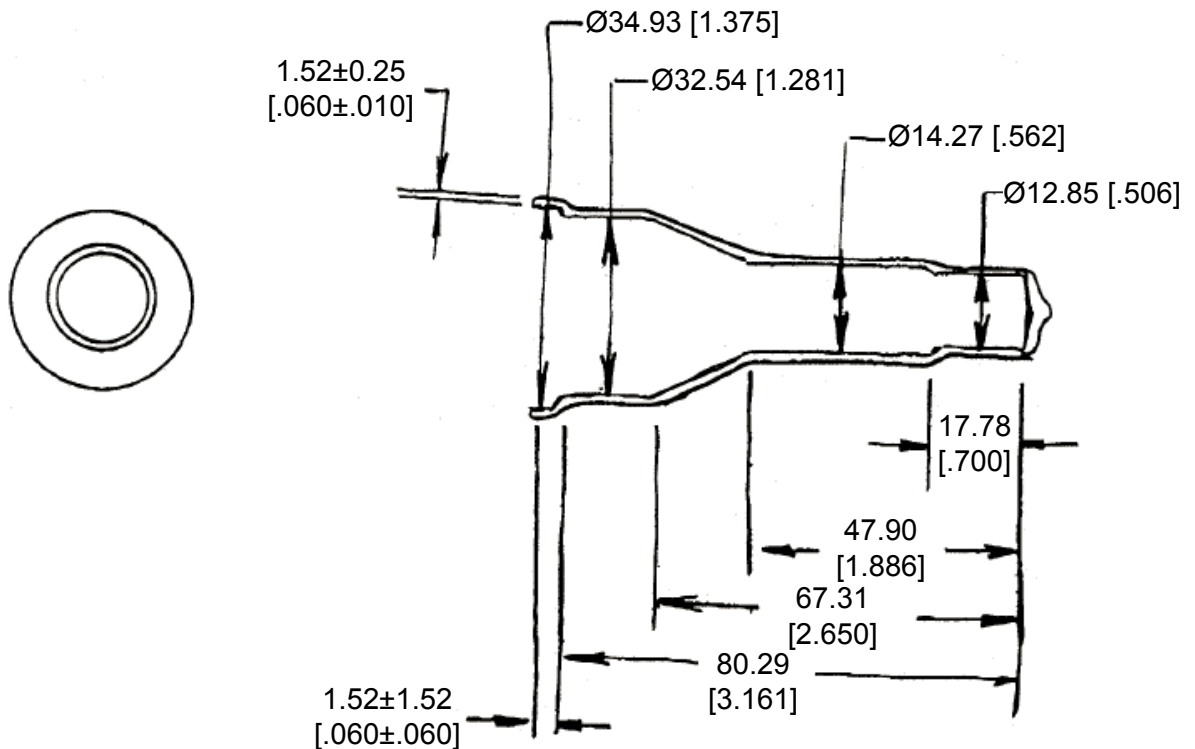

3. PART NO. HD10-6BT-BK

2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]

1. THIS PART IS USED ON  
 HD10-6-XXX RECEPTACLES  
 HD14-6-XXX-RECEPTLCLES  
 HD16-6-XXX PLUGS  
 WHERE XXX IS PIN ARRANGEMENTS. SEE INDIVIDUAL CUSTOMER DRAWINGS

DIMENSIONS: <b>MM [INCH]</b>		DWN <b>D. MEYER 27AUG2014</b>	MATERIAL <b>PVC</b>	FINISH <b>BLACK</b>	
TOLERANCES UNLESS OTHERWISE SPECIFIED:  0 PLC ± 1 PLC ± 2 PLC ± 0.63 [.025] 3 PLC ± 4 PLC ± ANGLES ± 5°		CHK <b>I. GRANTCHAROVA 27AUG2014</b>	 <b>TE</b> Connectivity		
		APVD <b>D. MEYER 27AUG2014</b>			
		PRODUCT SPEC		NAME <b>BOOT, RECEPTACLE, SIZE 6 HD10 SERIES</b>	
APPLICATION SPEC		SIZE <b>A 4</b> CAGE CODE <b>4AFU8</b> DRAWING NO <b>C- HD10-6BT-BK</b> RESTRICTED TO <b>-</b>			
WEIGHT <b>11.00 g</b>		Customer Drawing			
SCALE <b>NONE</b>		SHEET <b>1</b> OF <b>1</b>		REV <b>A</b>	