

2014

RELEASED FOR PUBLICATION


ALL RIGHTS RESERVED.

© COPYRIGHT 2014 BY TE CONNECTIVITY

THIS DRAWING IS UNPUBLISHED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE PER ECO-14-013277	08-27-14	DM	DM

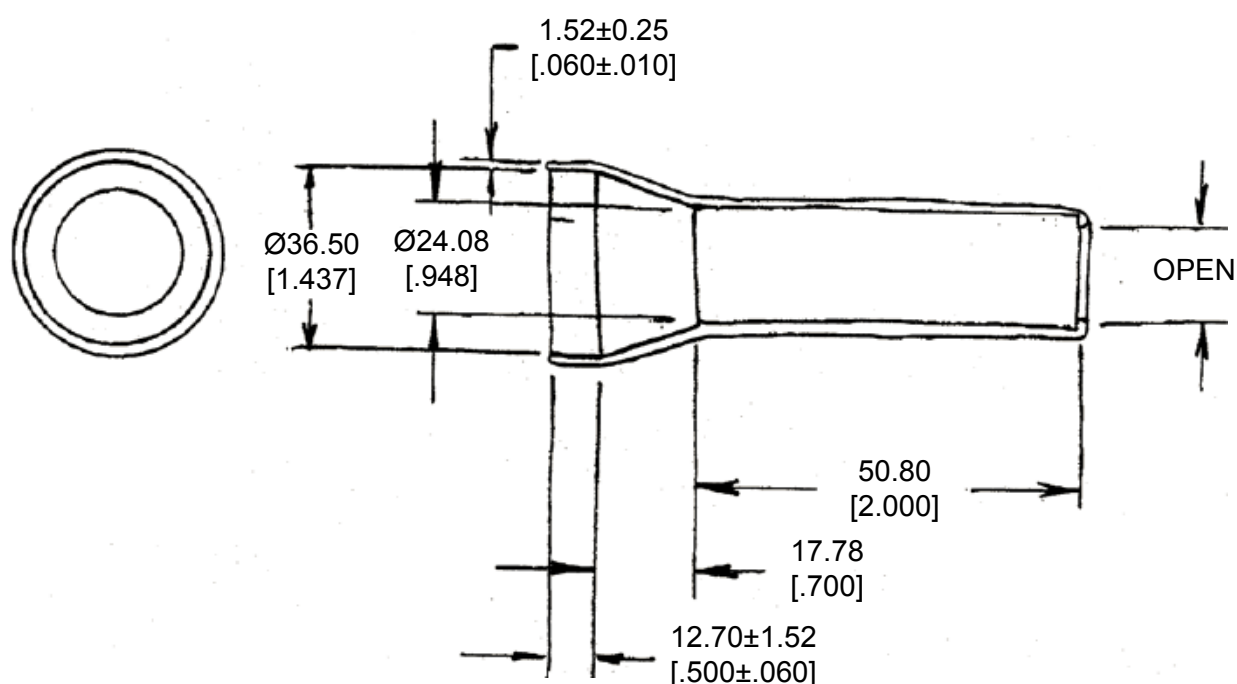


3. PART NO. HD30-24BT

2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]

1. THIS PART IS USED ON
 HDP24-24-XXX RECEPTACLES
 HDP26-24-XXX PLUGS
 HD34-24-XXX RECEPTACLES
 HD36-24-XXX PLUGS

WHERE XXX IS PIN ARRANGEMENTS. SEE INDIVIDUAL CUSTOMER DRAWINGS

DIMENSIONS: MM [INCH]	DWN D. MEYER 27AUG2014	MATERIAL PVC	FINISH GRAY		
	CHK I. GRANTCHAROVA 27AUG2014	 TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD D. MEYER 27AUG2014				
0 PLC ±	PRODUCT SPEC	NAME BOOT, SIZE 24 HD30/HDP20 SERIES			
1 PLC ±	APPLICATION SPEC				
2 PLC ± 0.63 [.025]	WEIGHT 16.50 g	SIZE A 4	CAGE CODE 4AFU8	DRAWING NO HD30-24BT	RESTRICTED TO -
3 PLC ±	Customer Drawing		SCALE NONE	SHEET 1 OF 1	REV A
4 PLC ±					
ANGLES ± 5°					

