
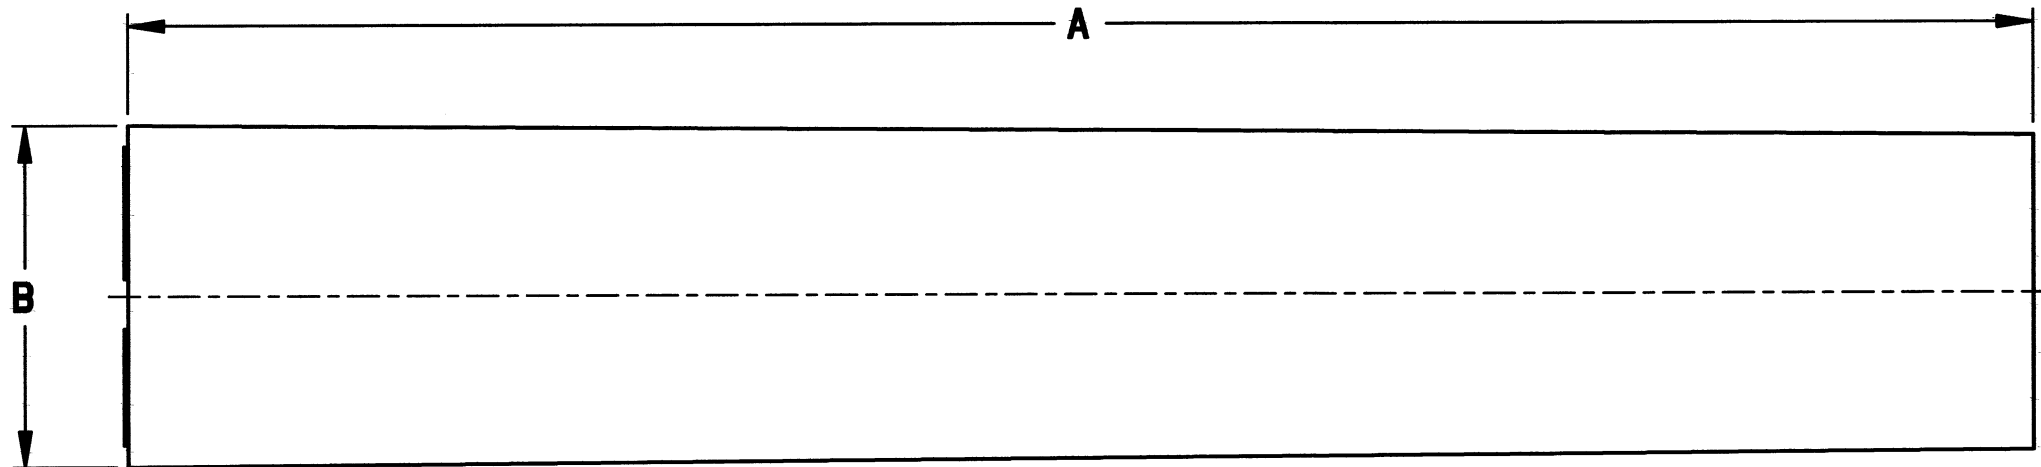



PART NUMBER	A ±.100	B MAX
JS-16-00	2.465 [62.61]	.385 [9.78]
JS-12-00	2.500 [63.50]	.500 [12.70]
JS-04-00	3.437 [87.30]	.765 [19.43]

REV	JS-**-**	REVISIONS			
G		SYM	DESCRIPTION	DATE	APPROVED
		D	CHANGE PER E.O. A 1438	10-24-84	A.Y.
		E	REDRAWN-REVISED PER E.O. P15306	6-12-97	A.Y.
		F	REVISED PER E.O. P20435	2-22-10	R.D.R.
		G	REVISED PER E.O. P20841	3-9-11	RDR

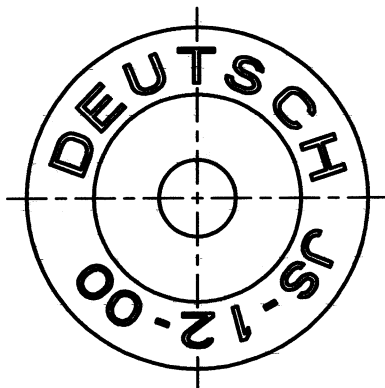

CONTACT SIZE	MIN. INSUL. O.D. [mm]	MAX. INSUL. O.D. [mm]	WIRE RANGE [mm ²] REF ONLY 
16	.100 [2.54]	.134 [3.40]	14-20 AWG [2.0-0.5]
12	.134 [3.40]	.170 [4.32]	12-14 AWG [3.0-2.0]
4	.280 [7.11]	.292 [7.42]	6 AWG [13.0]

5. MATERIAL - COVER SEAL: RUBBER.



 FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS, SEE ENVELOPE DRAWING 0425-015-0000.

3. JS-12-00 SHOWN FOR REFERENCE ONLY.

2. DIMENSION TOLERANCE: ±.025 [.64].

1. DIMENSIONS ARE IN INCHES [mm].

NOTES: UNLESS OTHERWISE SPECIFIED

SIGNATURE & DATE		JIFFY SPLICE SIZES 16, 12, & 4 ENVIRONMENTAL ENVELOPE		EP	MATL. CODE
DR	J. QUESADES 28APR97			 3850 INDUSTRIAL AVE. HEMET, CA 92545	
CHK	DMeyer 3/9/11				
PE	DMeyer 3/9/11				
APPD	R. Reed 3-9-11				
SCALE	NONE	WT		 JS-**-**	CODE 11139 SHEET 1 OF 1