

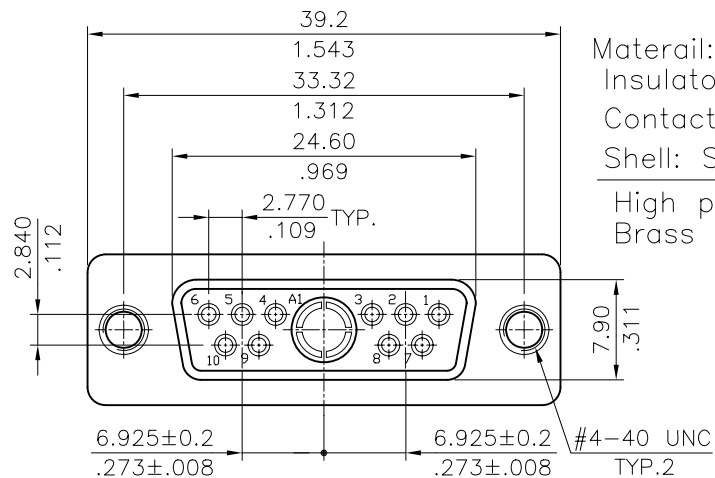
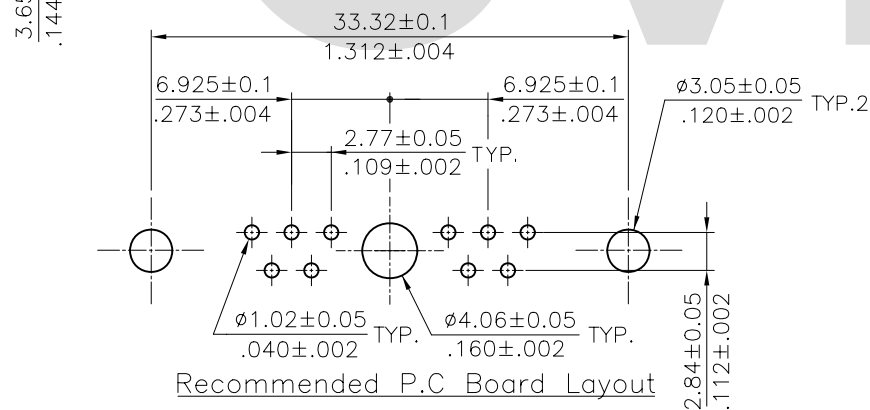


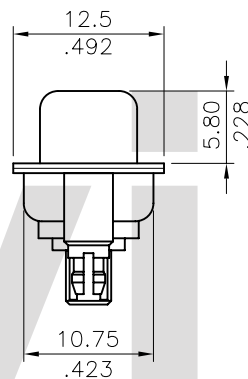

Material:
 Insulator: Glass filled Polyester UL 94V-0
 Contact: Copper alloy
 Shell: Steel, Tin plated as standard
 High power Contact :
 Brass with Gold plated

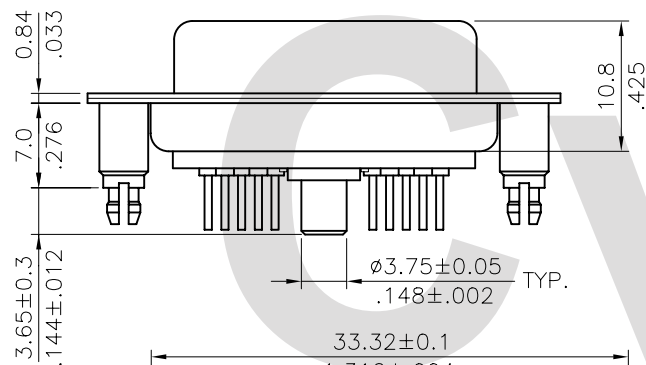

Ordering Code

11W1 S P V 3 2 1 40 D00
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: S= Receptacle
- ③ Contact type: P= High Power Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ High power contact plating:
 2= Gold flash plated over Nickel
 3= 15μ" Gold plated over Nickel
 4= 30μ" Gold plated over Nickel
 5= 50μ" Gold plated over Nickel
- ⑥ Singal contact plating:
 2= Gold flash plated over Nickel
 3= 15μ" Gold plated over Nickel
 4= 30μ" Gold plated over Nickel
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 40= 40A
- ⑨ Mounting Style:
 000= With ø3.05mm holes on shell
 B00= Riveted #4-40 UNC open nuts on front shell
 C00= Riveted #4-40 UNC open nuts on rear shell
 D00= Riveted #4-40 UNC ground stand-off on rear shell(standard)

Mounting Style

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	D00

4					DATE	UNIT: mm / inch	TITLE: 11W1 40A HIGH POWER FEMALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	瀚荃股份有限公司 CviLux Corporation
3					DRAWN BY: Rita	10/18-01'		
2					ENGINEER: David	10/19-01'		
1					CHECKED BY: David	10/19-01'		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	10/19-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED .X ± 0.30/.012 X' ± 1' .XX ± 0.20/.008 .X' ± .XXX ± 0.10/.004 .XX' ±	FINISH:	DRAWING NO. 11W110SB PART NO. 11W1SPV***40*00 SCALE 2 / 1 SHEET 1 OF 1

CVILUX.CORP
 2001.10.22
 ISSUED