


Part No.	Wire Range	Insulation Diameter	Reel Q'ty
CI94T03*PP0	AWG #18~#22	2.10 (.083) MAX.	4,000 PCS.


Ordering Code:

CI94 T03 A P P 0  
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Type: T03= AWG #18 ~ #22
- ③ Plating:  
 A= Selective Gold flash plated 50μ" Nickel  
 B= Selective 15μ" Gold plated 50μ" Nickel  
 C= Selective 30μ" Gold plated 50μ" Nickel
- ④ Material: P= Phosphor Bronze
- ⑤ Plating method: P= Post plating
- ⑥ Option: 0= Standard

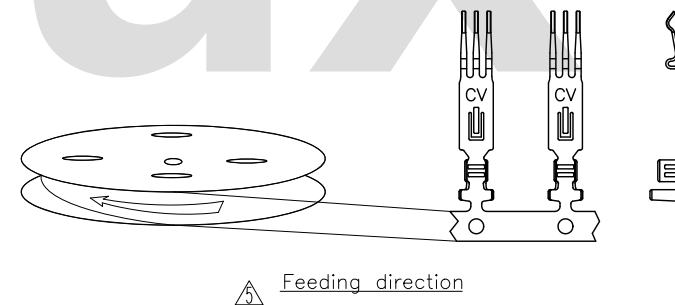

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation
⑥	Tim	1/28-11'	ECR11010-0/ECN11028			UNIT: mm / inch	SERIAL ATA POWER CRIMP TERMINAL	
⑤	Sun	12/22/08'	ECN08616			TOLERANCE UNLESS OTHERWISE SPECIFIED		
④	Sandy	12/13/05'	ECN05432, ECR05065-1			.X ± 0.20/.008 X' ± 1'		
③	Jason	02/16/05"	ECN05061, ECR05013-0			.XX ± 0.10/.004 .X' ±		
						.XXX ± 0.05/.002 .XX' ±		
								DRAWING NO. CI9401SH PART NO. CI94T03*PP0
								SCALE 4 / 1 SHEET 1 OF 1

**CVILUX CORP.**  
**2011.03.08**  
**ISSUED**

DRAWN BY: Tim  
 ENGINEER: Eisley  
 CHECKED BY: Eisley  
 APPROVED BY: David

DATE: 2/1-11'  
 DATE: 2/8-11'  
 DATE: 2/8-11'  
 DATE: 2/8-11'

MATERIAL:  
 FINISH:

DRAWING NO. CI9401SH PART NO. CI94T03\*PP0  
 SCALE 4 / 1 SHEET 1 OF 1