
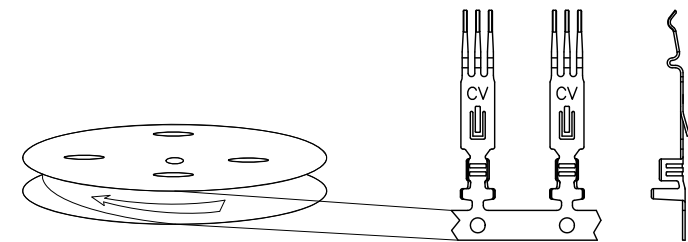


Part No.	Wire Range	Insulation Diameter	Reel Q'ty
CI94TA3*PPO	AWG #18x2-#22x2	2.10 (.083) MAX.	3,500 PCS.

Ordering Code:

CI94 TA3 A P P 0  
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Type: TA3= AWG #18x2 - #22x2
- ③ Plating:  
 A= Selective Gold flash plated 50μ" Nickel  
 B= Selective 15μ" Gold plated 50μ" Nickel  
 C= Selective 30μ" Gold plated 50μ" Nickel
- ④ Material: P= Phosphor Bronze
- ⑤ Plating method: P= Post plating
- ⑥ Option: 0= Standard

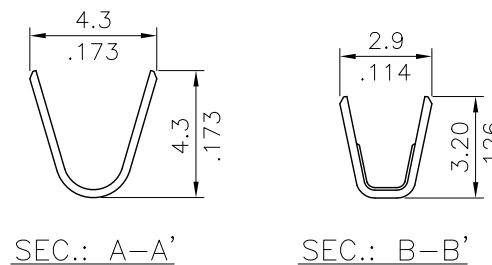

▲ Feeding direction

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch
5	Tim	1/28-11'	ECR11010-0/ECN11028			
4	Sun	12/22/08'	ECN08616	DRAWN BY: Tim	2/1-11'	TOLERANCE UNLESS OTHERWISE SPECIFIED
3	Sandy	12/12/05'	ECN05432/ECR05065-1	ENGINEER: Eisley	2/8-11'	.X ± 0.20/008 X' ± 1'
2	Eisley	05/10/05'	ECN05164	CHECKED BY: Eisley	2/8-11'	.XX ± 0.10/004 .X' ±
				APPROVED BY: David	2/8-11'	.XXX ± 0.05/002 .XX' ±

CVILUX CORP  
 2011.03.08  
 ISSUED

TITLE: SERIAL ATA POWER CRIMP TERMINAL  
 MATERIAL:  
 FINISH:

瀚荃股份有限公司  
 CviLux Corporation

DRAWING NO.	CI9414SE	PART NO.	CI94TA3*PPO
SCALE	4 / 1	SHEET	1 OF 1