
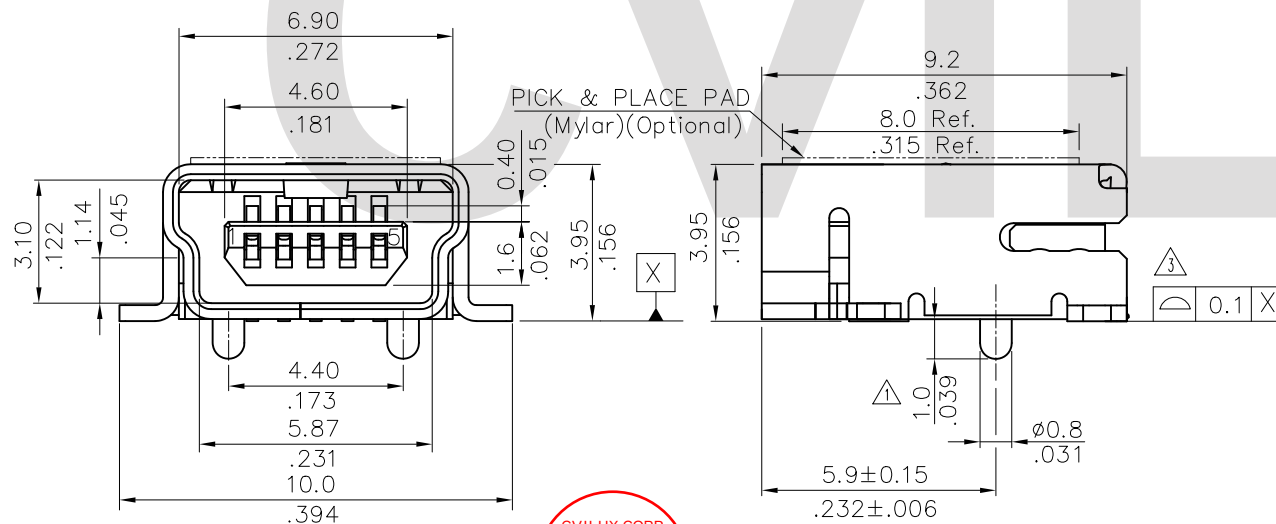



- * Insulation: Glass filled Polyamide UL 94V-0
- * Contacts: Copper Alloy
- * Shell: Copper Alloy
- * Shell Plating:
120μ" Tin plated over 30μ" Nickel(Matte Tin Finish)
- * Pick & Place Pad : Glass filled polyamide
UL 94V-0
- * Solder tail with Matte Tin Finish

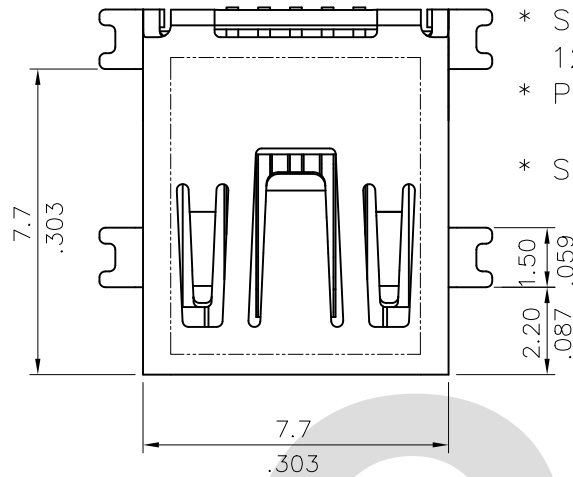

CVILUX CORP
2014.04.11
ISSUED

CU04	S	*	M	1	5	B	0	- * 0	- L F
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩


- ① Series No.
- ② S= Socket
- ③ Plating option:
 - A= Selective Gold flash plated over $1.27\mu\text{m}(50\mu\text{'})$ Nickel
 - △ B= Selective $0.38\mu\text{m}(15\mu\text{'})$ Gold plated over $1.27\mu\text{m}(50\mu\text{'})$ Nickel
 - C= Selective $0.76\mu\text{m}(30\mu\text{'})$ Gold plated over $1.27\mu\text{m}(50\mu\text{'})$ Nickel
- ④ Tail style: M= SMT Type
- ⑤ Insulator Color: 1= Black
- ⑥ No of Circuits: 5= 5 Pin
- ④ △ ⑦ Type: B= Mini USB 5 Pin Type—B
- ⑧ Option: 0= Standard
- ⑨ Packing Option:
 - R0= Tape & Reel Packing (With Pick & Place Pad)
 - T0= Tube Packing
- ⑩ Other option: LF= For Leadfree IR Processes

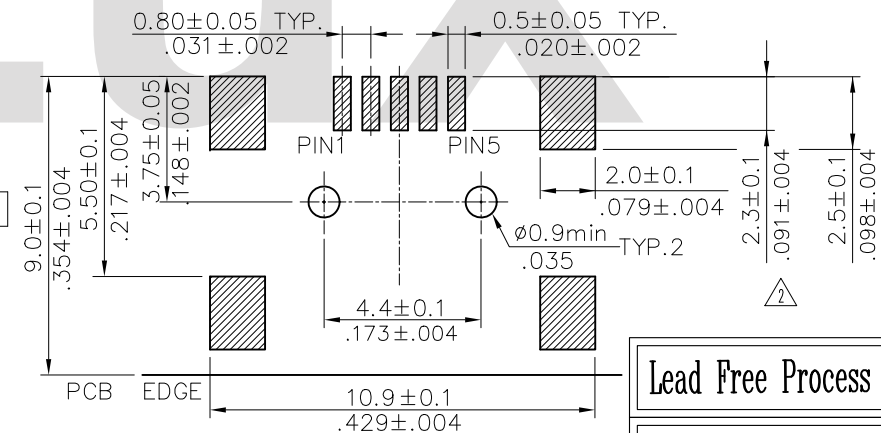

Lead Free Process

RoHS Compliant



6	Enya	2/19-14'	ECNT114026	ISSUED		DATE	UNIT: mm / inch		TITLE: MINI USB 5 PIN SMT BOARD MOUNT CONNECTOR		 瀚荃股份有限公司 CviLux Corporation			
5	Enya	7/11-12'	ECR12056-1/ECN12142-0	DRAWN BY:	Enya	4/02-14'	TOLERANCE UNLESS OTHERWISE SPECIFIED							
4	Karen	5/24-10'	ECN10083	ENGINEER:	Sun	4/02-14'	.X ± 0.20/.008	X: ± 1"	MATERIAL:		DRAWING NO. CU0416SH PART NO. CU04S*M15B0-*0-LF			
3	Sansy	3/28-07'	ECN07082/ECR07035-0	CHECKED BY:	Eisley	4/08-14'	.XX ± 0.10/.004	X: ±						
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	4/08-14'	.XXX ± 0.05/.002	.XX ±			SCALE	4 / 1	SHEET	1 OF 2

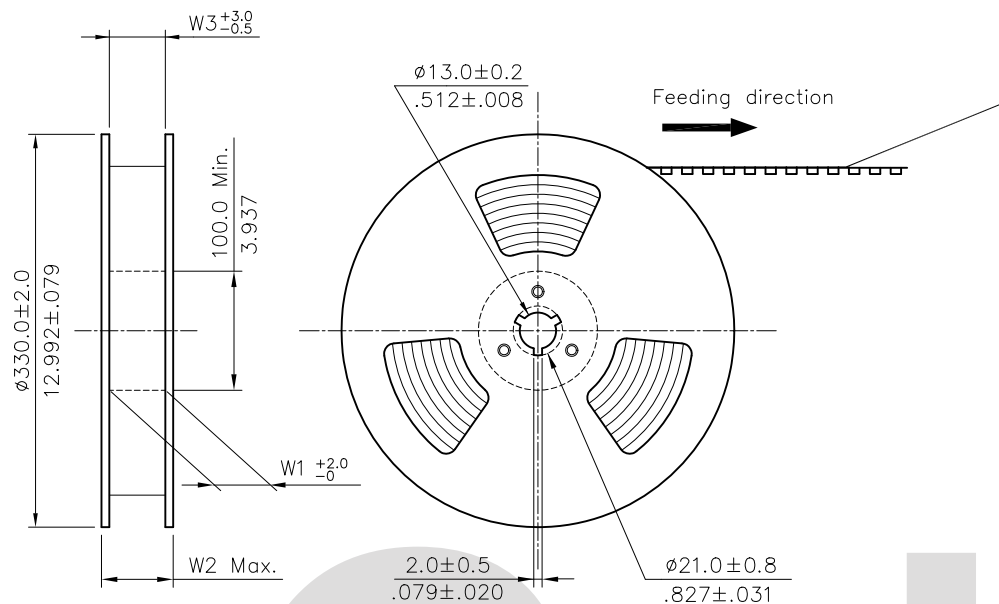

NOTE :

- * Reel Material : Corrugated Paper
- * Carrier Material : Black, Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N — 1.3N
- * Carrier camber is within 1mm in 250mm
- * All dimensions meet EIA-481-B requirements.
- * Quantity : 700 PCS/Reel

Dimension				Packing (Reel/Caton)
E	W1	W2	W3	
24.0(.945)	24.5(.965)	30.5(1.201)	24.5(.965)	9

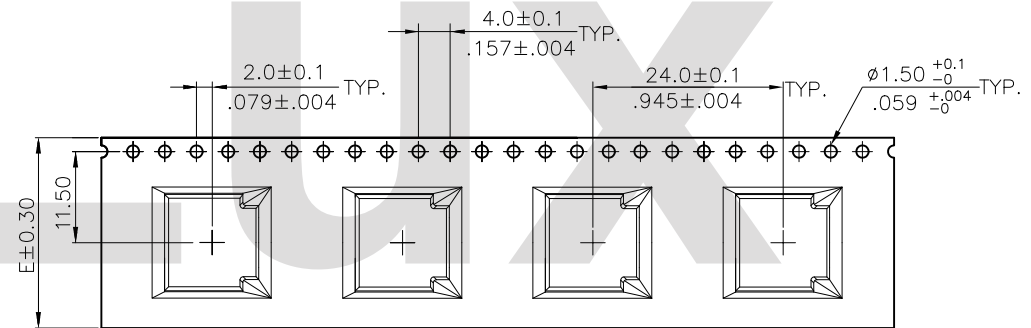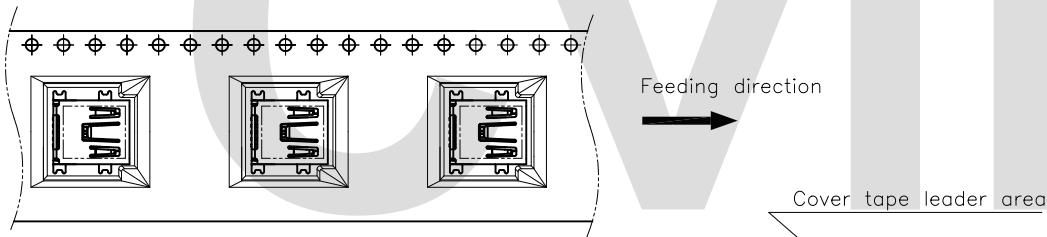

WIDTH : 24 mm Carrier



RoHS Compliant

10	Enya	2/19-14'	ECNT114026		DATE	UNIT: mm / inch	TITLE: MINI USB 5 PIN SMT BOARD MOUNT CONNECTOR	 瀚荃股份有限公司 CviLux Corporation			
9	Enya	7/11-12'	ECR12056-1/ECN12142-0	DRAWN BY:	Enya	4/02-14'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
8	Karen	5/24-10'	ECN10083	ENGINEER:	Sun	4/02-14'	.X ±	.X' ±	MATERIAL:		
7	Sandy	4/29-07'	ECN07153	CHECKED BY:	Eisley	4/08-14'	.XX ±	.X' ±			
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	4/08-14'	.XXX ±	.XX' ±	FINISH:		
								DRAWING NO.	CU0416SH	PART NO.	CU04S*M15B0-*0-LF
								SCALE		SHEET	2 OF 2