




CP04 Series 4.00mm(.157") High Voltage Wire to Board Connectors

- Current Rating: 1.0A AC/DC
- Voltage Rating: 3000V AC/DC
- Low profile with high withstanding voltage
- Mate with CP04 header
- Can be used CP05 Crimp Clip Terminal
- Insulator: Nylon 66 UL 94V-0, Color Nature



RoHS Compliant




P/N CP04**SL000



Circuits	Dim.A	Dim.B
02	4.00(.157)	9.8(.386)
03	8.00(.315)	13.8(.543)
04	12.00(.472)	17.8(.701)
05	16.00(.630)	21.8(.858)







P/N CP04**SB000




Circuits	Dim.A	Dim.B
2B	8.0(.315)	16.2(.638)
2C	12.00(.472)	20.2(.795)
2D	16.00(.630)	24.2(.953)
2E	13.00(.511)	21.2(.835)

Circuits	Dim.C	Dim.D
2B	11.6(.457)	10.4(.409)
2C	15.6(.614)	14.4(.472)
2D	19.6(.772)	18.4(.724)
2E	16.6(.654)	15.4(.606)

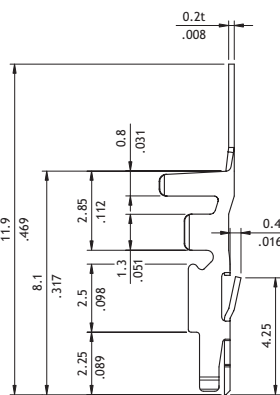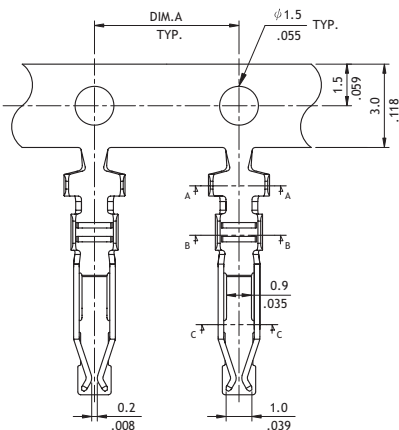


Part No.	DIM.A	Wire Range	Insulation Diameter	Reel Q'ty
CP05T021PE0	6.2(.244)	AWG #24-#28	1.45 (.057) MAX.	10,000 PCS.
CP05T031PE0	10.5(.413)	AWG #24 (6KV)	1.74 (.069) MAX.	4,000 PCS.


P/N: CP05T021PE0



SEC: C-C




SEC: B-B




SEC: A-A


P/N: CP05T031PE0



SEC: C-C



SEC: B-B



SEC: A-A

Ordering Code

1 **2** **3** **4** **5**
CP04 05 S L 000

- 1** Series No.
- 2** No. of Circuits: 02, 03, 04, 05
(For side press type:
2B: Dim.A = 8.0mm, 2C: Dim.A = 12.0mm,
2D: Dim.A = 16.0mm, 2E: Dim.A = 13.0mm)
- 3** S = Housing
- 4** Type: L = With Upper Latch Type
B = Side Press Type
- 5** Other Options: 000 = Color Nature

1 **2** **3** **4** **5** **6**
CP05 T02 1 P E 0

- 1** Series No.
- 2** Wire Range: T02 = AWG #24 ~ #28
T03 = AWG #24 (6KV)
- 3** Plating: 1 = Tin over Nickel
- 4** Material: P = Phosphor Bronze
- 5** Plating method: E = Pre-tinned
- 6** Other Options: 0 = Standard