



40A High Power Right Angle DIP Combination D-Sub


C8W8 (Plug Connector)

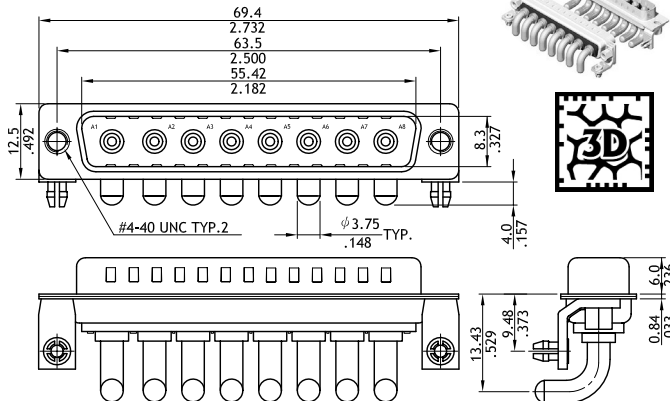


C8W8 (Receptacle Connector)

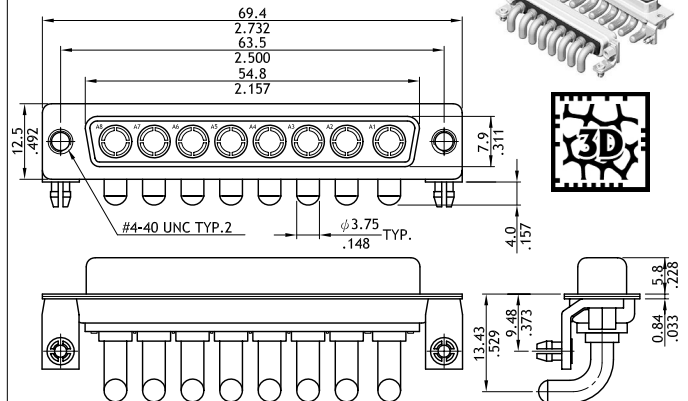


21W4 (Plug Connector)

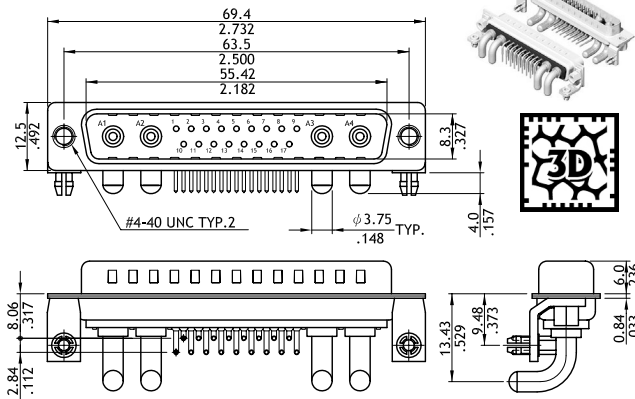


21W4 (Receptacle Connector)

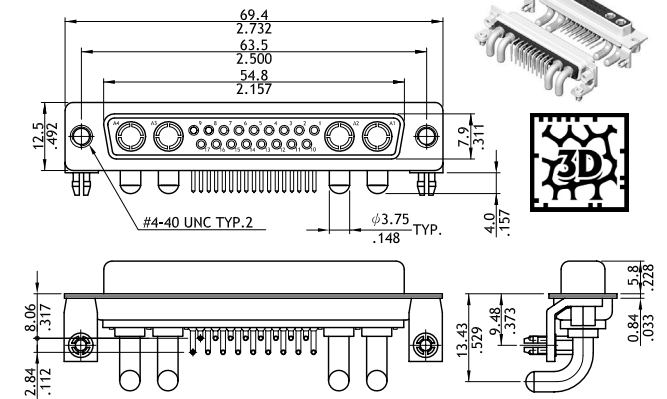

25W3 (Plug Connector)

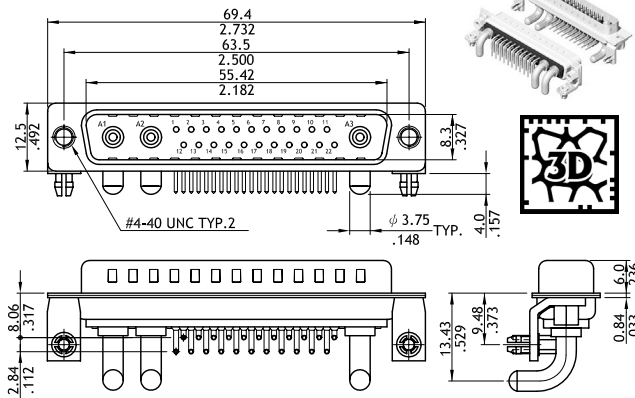

25W3 (Receptacle Connector)

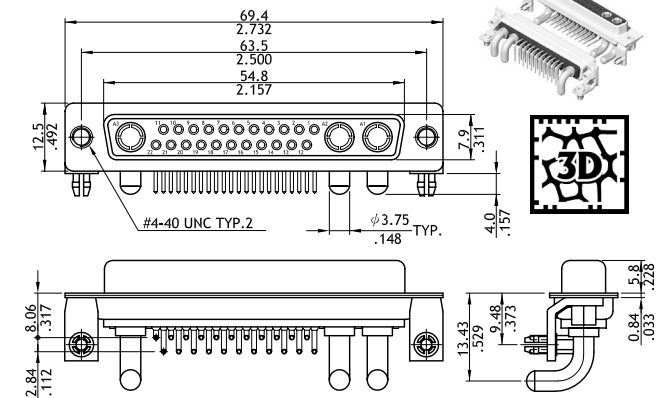

Ordering Code

1 **2** **3** **4** **5** **6** **7** **8** **9**
I 3 W 3 **S** **P** **H** **2** **2** **1** **4 0** **I 1 0**

1 Series No.: C3W3,3W3C,C7W2,11W1,C5W5,13W3
17W3,C8W8,21W4,25W3,36W4

2 Connector Type: P = Plug
S = Receptacle

3 Contact Type: P = High Power Contact

4 Contact Tail Style: H = Right Angle DIP Type

5 High Power Contact Plating: 2 = Gold flash over Nickel

6 Signal Contact Plating: 2 = Gold flash over Nickel
0 = Without Signal Contact

7 Insulator Color: 1 = Black

8 Performance: 40 = 40A

9 Mounting Style:

000 = With $\phi 3.05\text{mm}$ holes on shell

B00 = Riveted #4-40 UNC Open nuts on Front shell

C00 = Riveted #4-40 UNC Open nuts on Rear shell

I00 = Riveted #4-40 UNC Ground tabs with $\phi 3.2\text{mm}$ holes

I10 = Riveted #4-40 UNC Ground tabs with board locks

(Standard) *Special options consult manufacturer