


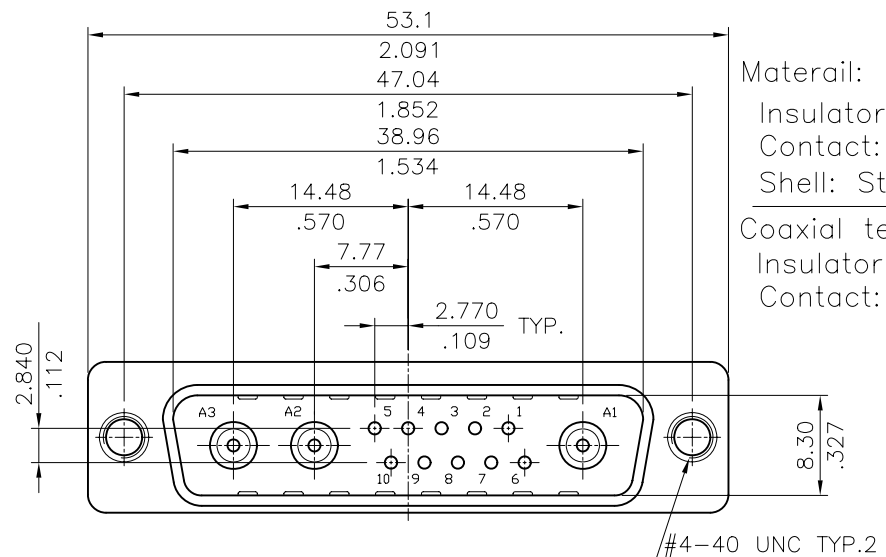

Material:

Insulator: Glass filled Polyester UL 94V-0


Contact: Copper alloy

Shell: Steel, Tin plated as standard


Coaxial terminal

Insulator: Teflon UL 94V-0, Color white

Contact: Brass

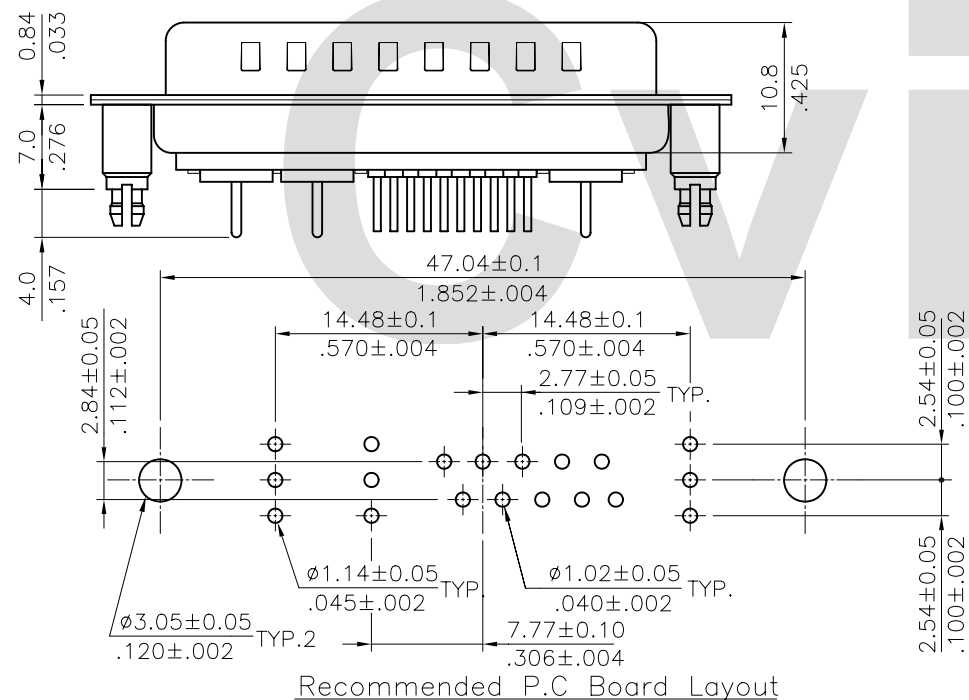

Recommended P.C Board Layout

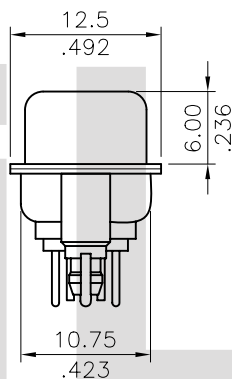

Ordering Code

13W3 P C V 3 2 1 75 D00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: P= Plug
- ③ Contact type: C= Coaxial Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ Coaxial contact plating:

2= Gold flash plated over Nickel

3= 15μ" Gold plated over Nickel

4= 30μ" Gold plated over Nickel

5= 50μ" Gold plated over Nickel

- ⑥ Singal contact plating:

2= Gold flash plated over Nickel

3= 15μ" Gold plated over Nickel

4= 30μ" Gold plated over Nickel

- ⑦ Insulator color: 1= Black, 6= Green

- ⑧ Performance: 50= 50Ω, 75= 75Ω

- ⑨ Mounting Style:

000= With ø3.05mm holes on shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

D00= Riveted #4-40 UNC ground stand-off on rear shell(standard)

Mounting Style

Code	000	Code	B00	Code	C00	Code	D00
			DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 7.0mm

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 13W3 COAXIAL MALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	 瀚菱股份有限公司 CviLux Corporation			
3					DRAWN BY: Rita	10/18-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2					ENGINEER: David	10/19-01'	.X ± 0.30/.012 X' ± 1'				
1					CHECKED BY: David	10/19-01'	.XX ± 0.20/.008 X' ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	10/19-01'	.XXX ± 0.10/.004 XX' ±	FINISH:	DRAWING NO. 13W303SB	PART NO. 13W3PCV*****00	SCALE 2 / 1	SHEET 1 OF 1

CVILUX.CORP
2001.10.22
ISSUED