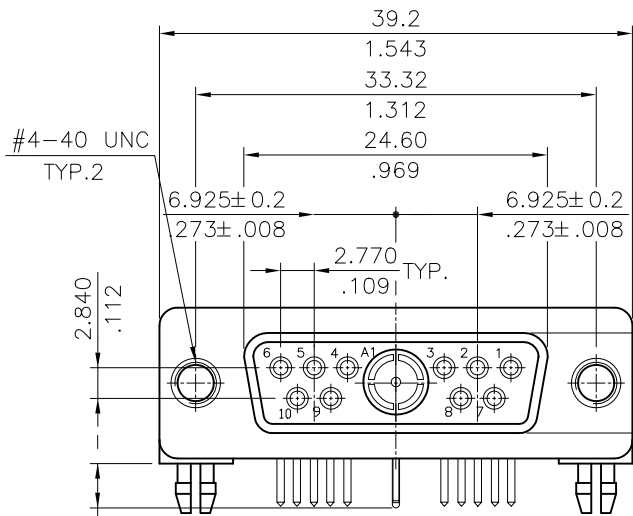




Notes:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

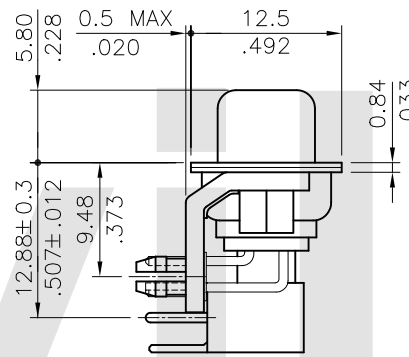
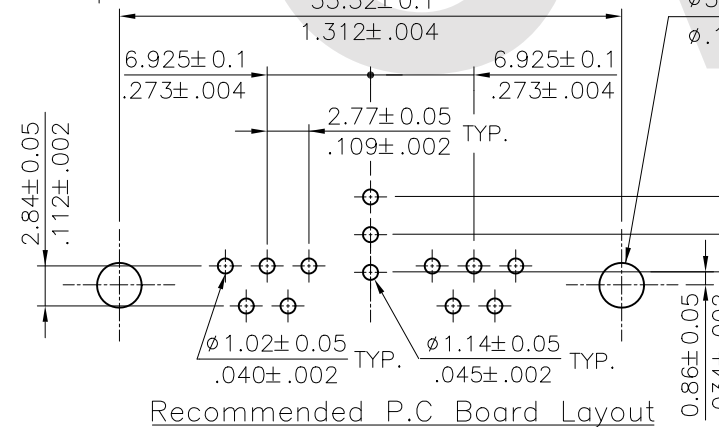
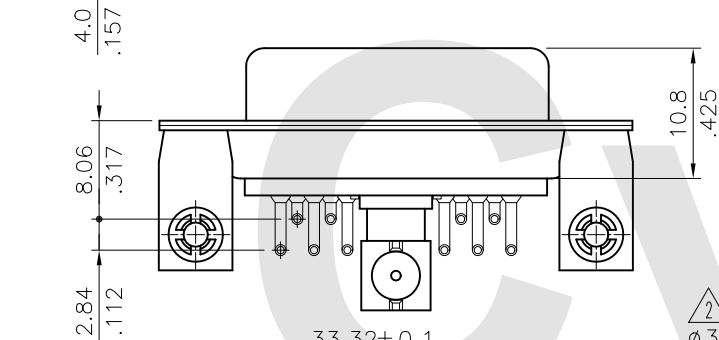
Shell: Steel, Tin plated as standard

Coaxial terminal

Insulator: Teflon UL 94V-0, Color white

Contact: Brass

*For Lead Free Wave Flow Process



Ordering Code






11W1 S C H 3 2 1 75 I10
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: S= Receptacle
- ③ Contact type: C= Coaxial Contact
- ④ Contact tail style: H= Right Angle Dip type
- ⑤ Coaxial contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel
- ⑥ Signal contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 50= 50Ω, 75= 75Ω
- ⑨ Mounting Style:
000= With ø3.05mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
I00= Riveted #4-40 UNC ground tabs with ø3.2mm holes
I10= Riveted #4-40 UNC ground tabs with board locks(standard)

Mounting Style

Lead Free Process

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	I00	Code	I10
									

4				DATE	UNIT: mm / inch	TITLE: 11W1 COAXIAL FEMALE D-SUB CONNECTOR (RIGHT ANGLE PCB MOUNT TYPE)	 瀚荃股份有限公司 CviLux Corporation			
3										
2	Karen	4/07-17'	ECNT117049/ECRT117003	DRAWN BY: Karen	4/10-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWING NO. 11W106SD PART NO. 11W1SCH*****			
1	Sun	12/10-08'	ECN08604	ENGINEER: Sun	4/10-17'	.X ± 0.30/.012 X' ± .1				
				CHECKED BY: Eisley	4/14-17'	.XX ± 0.20/.008 X' ± .05	SCALE 2 / 1 SHEET 1 OF 1			
				APPROVED BY: Eisley	4/14-17'	.XXX ± 0.10/.004 X' ± .005				

CVILUX CORP

2017.04.20

ISSUED