

Material:


- * Insulator: Glass filled polyester UL 94V-0
- * Contacts: Copper alloy
- * Shell: Steel, Tin plated as standard

Recommended P.C. Board Layout see drawing No. CD6113S*

Ordering Code:

CD62 25 P 2 1 F0
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Contacts
- ③ Contact type: P= Plug(Male)
- ④ Plating option:
2= Gold flash plated over Nickel
A= Selective Gold flash plated over Nickel
B= Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
C= Selective 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ⑤ Color: 1= Black
- ⑥ Other Option:
F0= Riveted ground hooks with #4-40 UNC open (Standard)
G0= Riveted ground hooks pre-loaded #4-40 UNC Hex screws
I0= Riveted ground tabs thread #4-40 UNC open and ground tabs with Ø3.2mm holes
J0= Assembly ground hooks by #4-40 UNC Hex screws

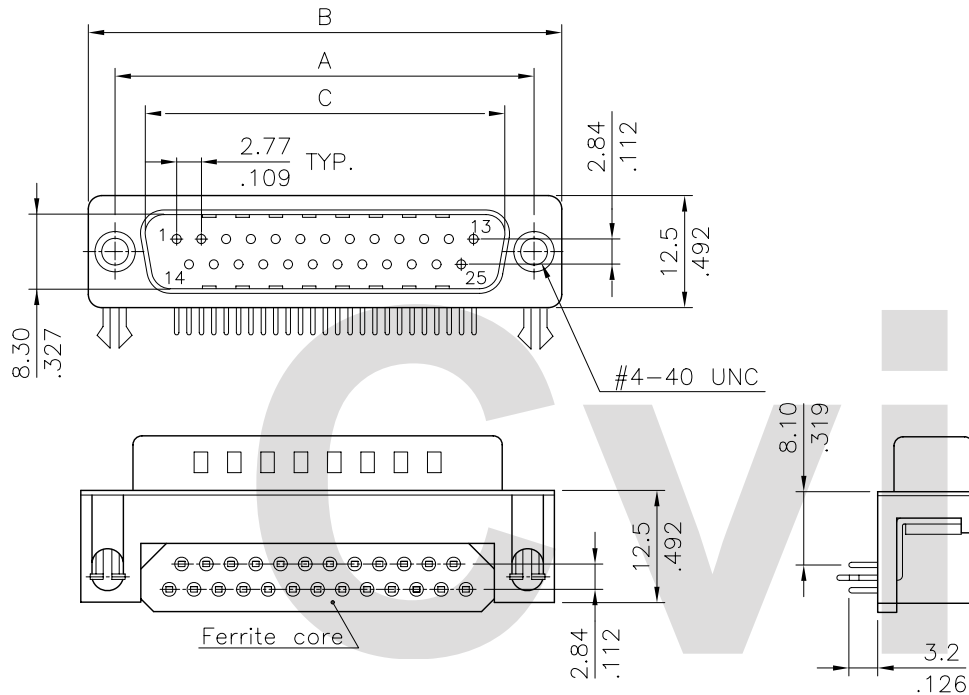

Circuits	Dimension		
	A	B	C
9	25.00(.984)	30.8(1.213)	16.92(.666)
15	33.32(1.312)	39.2(1.543)	25.25(.994)
25	47.04(1.852)	53.1(2.087)	38.96(1.534)
37	63.50(2.500)	69.4(2.732)	55.42(2.182)

Mounting Style				RoHS Compliant			
Code	F0	Code	G0	Code	I0	Code	J0
			DIM. L= 4.8mm		Ø A= 3.2mm		DIM. L= 4.8mm

④					DATE	UNIT: mm / inch	TITLE: D-SUB WITH FERRITE CORE PCB MOUNT (8.1mm) MALE CONNECTOR	瀚荃股份有限公司 CviLux Corporation
③					DRAWN BY: Eisley	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②					ENGINEER: David	.X ± 0.30/.012 X' ± 1'	FINISH:	DRAWING NO. CD6202SD PART NO. CD62**P1**
①					CHECKED BY: David	.XX ± 0.20/.010 .X' ±		SCALE 2 / 1 SHEET 1 OF 1
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	.XXX ± 0.10/.004 .XX' ±		

