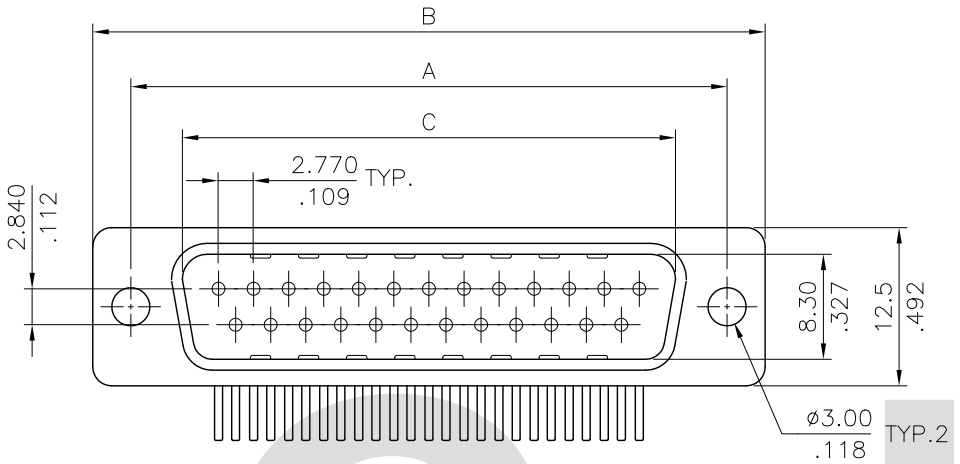

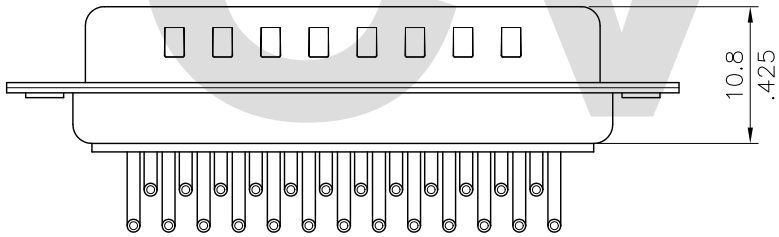

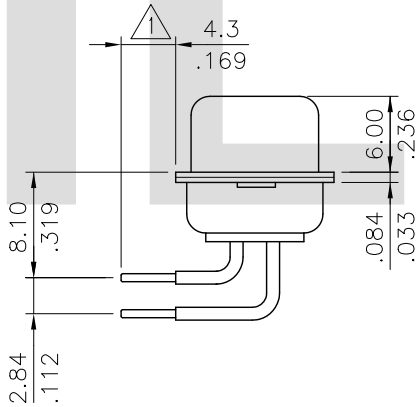

Materail:

Insulator: Glass filled Polyester UL 94V-0
Color Black or White
Contact: Brass
Shell: Steel, Tin plated as standard

Circuits	Dimension		
	A	B	C
9	25.00(.984)	30.8(1.213)	16.92(.666)
15	33.32(1.312)	39.2(1.543)	25.25(.994)
25	47.04(1.852)	53.1(2.091)	38.96(1.534)
37	63.50(2.500)	69.4(2.732)	55.42(2.182)

Ordering Code :

CD73 25 P * * 00
① ② ③ ④ ⑤ ⑥

1. Series No.
2. Contacts: 9,15,25,37
3. Contact type : P=Plug , S=Receptacle
4. Contact Plating :
   2 = Gold flash plated over 1.27μm(50μ") Nickel
   3 = 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
   4 = 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
   5 = 1.27μm(50μ") Gold plated over 1.27μm(50μ") Nickel
5. Insulator Color :
   1=Black , 0=White
6. Other option :
   00 = With ø3.00mm holes on shell

Lead Free Process

RoHS Compliant

SYM	NAME	DATE	REVISIONS
4			
3			
2			
1	Karen	10/04-11'	ECN11215/ECR11080-0

CVILUX CORP 2011.10.13 ISSUED

		DATE
DRAWN BY:	Karen	10/7-11'
ENGINEER:	Eisley	10/11-11'
CHECKED BY:	Eisley	10/11-11'
APPROVED BY:	Eisley	10/11-11'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.30/.012	X.° ± 1°
.XX ±0.20/.008	.X° ±
.XXX ±0.10/.004	.XX° ±

TITLE: D-SUB SIDE ENTRY (8.1mm) MALE CONNECTOR (MACHINED CONTACTOR)

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CD7301SE	PART NO.	CD73**P**00
SCALE	2 / 1	SHEET	1 OF 1