

- * Insulator : High temperature Nylon resin UL 94V-0
- * Contact : Phosphor Bronze
- * Shield : Copper Alloy

Ordering Code

CE50 04 S B 1 00

① ② ③ ④ ⑤ ⑥

① Series No.

② Contacts: 04,06 Circuits

③ Connector type: S= Receptacle

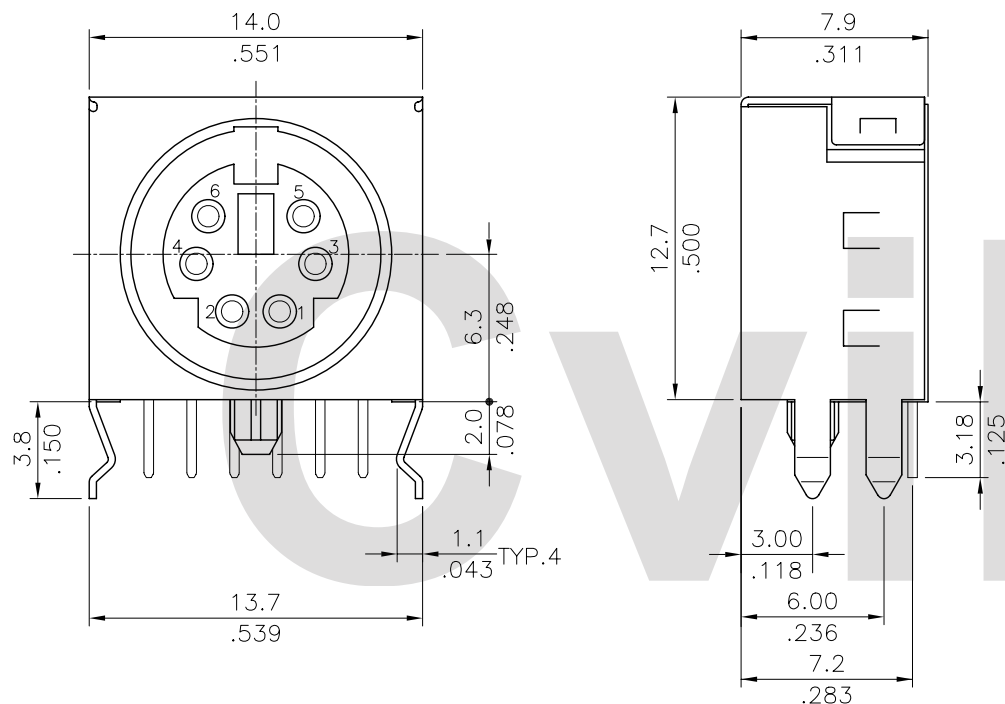
③ Plating code:





B= Selective 0.38 μ m(15 μ "") Gold plated
over 1.27 μ m(50 μ "") Nickel

C= Selective $0.76\mu\text{m}(30\mu'')$ Gold plated
over $1.27\mu\text{m}(50\mu'')$ Nickel

⑤ Color code: 1=Black

⑥ Other option: 00= Standard



Circuits	4	6
Arrangement of Contact		
P.C Board Layout		

RoHS Compliant

4				2009.03.24 ISSUED		DATE	UNIT: mm / inch		TITLE: SHORT BODY MINI DIN	 瀚荃股份有限公司 CviLux Corporation		
3	Karen	3/11-09'	ECN09115/ECR09022-0	DRAWN BY:	Karen	3/12-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2	Jim	5/24/06'	ECN06164	ENGINEER:	Eisley	3/13-09'	.X ± 0.30/.012	X* ± r	MATERIAL:			
1	Sun	7/01/05'	ECR05061-0/ECN05230	CHECKED BY:	David	3/13-09'	.XX ± 0.20/.008	.X* ±			FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	3/13-09'	.XXX ±	.XX ±		DRAWING NO. CE5001SE		PART NO. CE50**S*100
										SCALE	3 / 1	SHEET 1 OF 1