



Notes:

1. DIM. E = 2.5 min.
2. Pin overall length 20.0 max.
3. Material:
 - * Insulator: Nylon 6T With 30% GF. UL 94V-0 Color Black
 - * Square Pin: Brass
 - * Pick & Place Pad: Nylon 6T UL 94V-0 Color Nature

Ordering Code:

CH03 ** * M 1 ** - 0 *
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

Recommended P.C. Board Layout

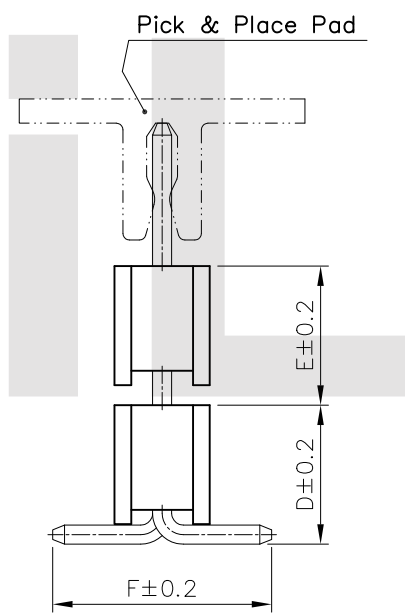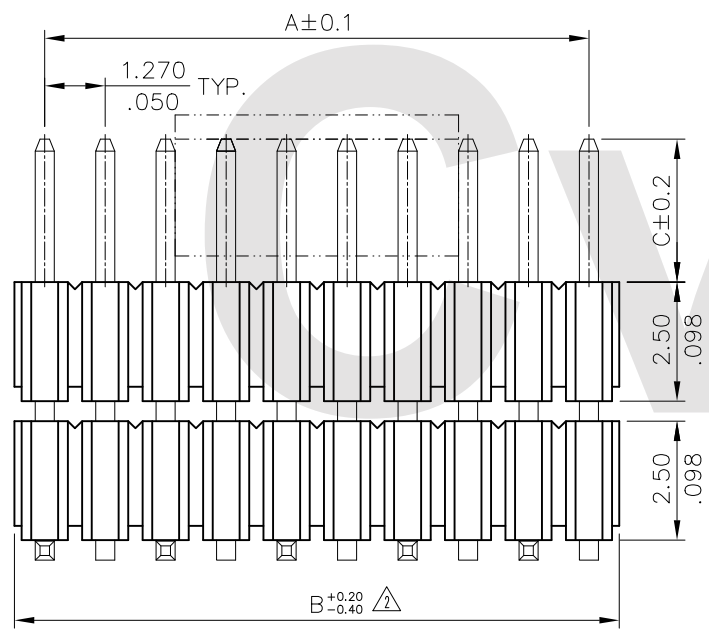

- ① Series No.
- ② No. of Contact: 04 to 50
- ③ Plating code:
 - 2=Gold Flash plated over 1.27 μm(50 μ") Nickel
 - 3=0.38 μm(15 μ") Gold plated over 1.27 μm(50 μ") Nickel
 - 4=0.76 μm(30 μ") Gold plated over 1.27 μm(50 μ") Nickel
- ④ Tail & Mounting Style:
 - M=Straight SMT Type
- ⑤ Insulator Material & Color:
 - 1=Nylon 6T , Color Black
- ⑥ Option Code:
 - See Table PDF. File No. CH0302T
- ⑦ Pin Size: 0=Original design
- ⑧ 0=Without Pick & Place Pad (Tube packaged)
 P=With Pick & Place Pad (Tape & Reel packing)

DIM. A = 1.27 X No. of Spaces
 DIM. B = DIM. A + 1.27
 * Available in 4 through 50 Circuits

Lead Free Process
 RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 1.27mm(.050") SINGLE ROW DUAL BODY SURFACE BOARD MOUNT PIN HEADER	瀚荃股份有限公司 CviLux Corporation
3					DRAWN BY: Ken 4/11-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
2	Ken	4/10-17'	ECNT117071/ECRB117010	2017.05.04	ENGINEER: Sun 4/24-17'	.X ± 0.25/.010 X' ± 1'	FINISH:	DRAWING NO. CH0302SD PART NO. CH03***M1**-0*
1	SUN	5/07/04'	ECN04183	ISSUED	CHECKED BY: Eisley 5/03-17'	.XX ± 0.15/.006 .X' ±		SCALE 6 / 1 SHEET 1 OF 1
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley 5/03-17'	.XXX ± 0.08/.003 .XX' ±		