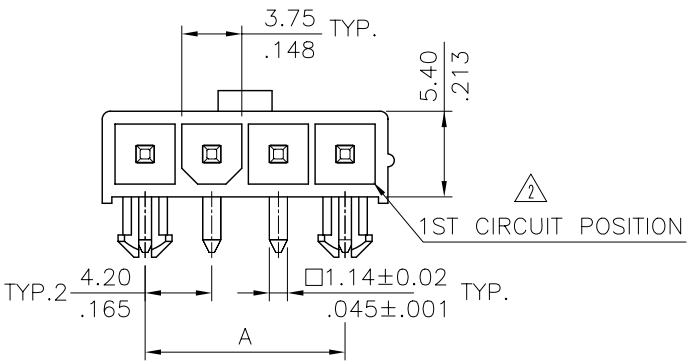

Material:

* Insulation: Nylon 66 , Color Nature
* Contact: Brass

Ordering Code:

CP-01 ① | 4 ② | ** ③ | 1 ④ | * ⑤ | S ⑥

① Series No.
② Type of Connector:
4= Right angle PCB mount header
③ No of Circuits:
④ Plating Code: 1= Tin over Nickel
2= Gold flash plated over Nickel
3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
⚠ ⑤ Variation: 4= UL 94V-2, With mounting pegs
5= UL 94V-0, With mounting pegs
⑥ S= Single Row Header

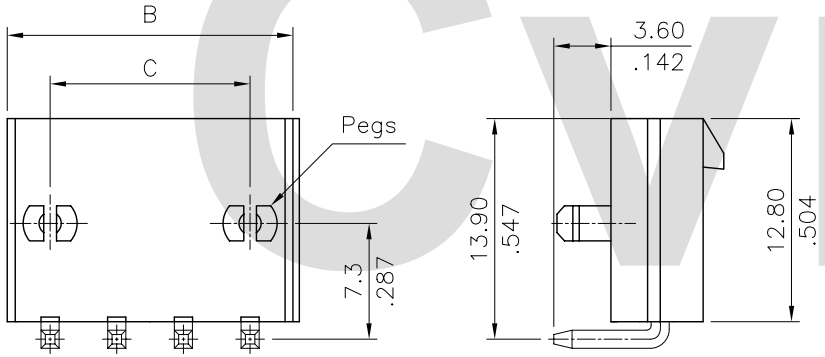

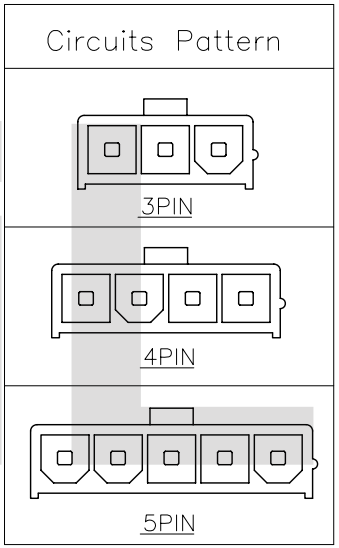

Circuits	Dimension		
	A	B	C
3	8.4(.331)	13.8(.543)	8.4(.331)
4	12.6(.496)	18.0(.709)	12.6(.496)
5	16.8(.661)	22.2(.874)	16.8(.661)

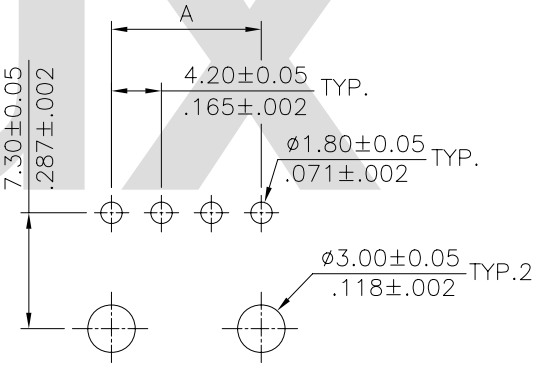

Recommended P.C. Board Layout

RoHS Compliant

CVILUX.XORP
2008.09.23
ISSUED

SYM	NAME	DATE	REVISIONS			DATE
4						
3				DRAWN BY:	Sandy	9/19-08'
2	Sandy	9/19-08'	ECN08463	ENGINEER:	Eisley	9/19-08'
1	Hank	10/4 07'	ECN07412	CHECKED BY:	Alex	9/19-08'
				APPROVED BY:	Alex	9/19-08'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X	± 0.38/.015	X°	± 1°
.XX	± 0.25/.010	.X°	±
.XXX	± 0.10/.004	.XX°	±

TITLE: RIGHT ANGLE HEADER
CP-01 POWER CONNECTOR

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CP0158AC	PART NO.	CP-014**14S CP-014**15S
SCALE	3 / 1	SHEET	1 OF 1