

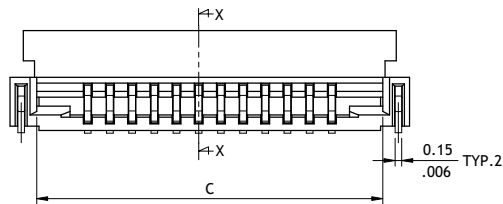
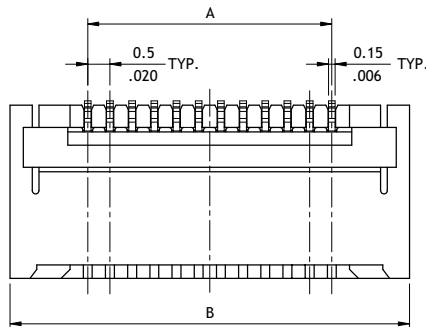


CF41 Series 0.50mm(.020")H=1.30 SMT ZIF FFC/FPC Connectors (Back Flip)

- 1.3mm above the board
- FPC zero insertion force and high retentions force
- Insulator: High temperature plastic UL 94V-0, Color Nature
- Cover: High temperature plastic UL 94V-0, Color Black
- Designed easy for FFC/FPC installation and reliable operation
- With metal fixed tabs to secure connector in place



RoHS Compliant  





$$A = 0.5 * \text{No. of Spaces}$$

$$B = A + 3.5$$

$$C = A + 2.3$$

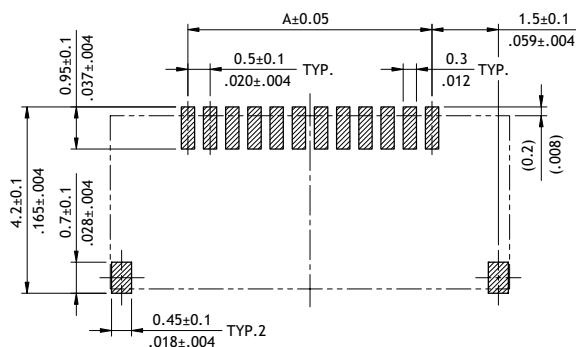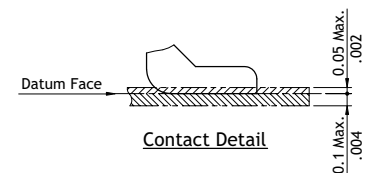

Recommended P.C. Board Layout

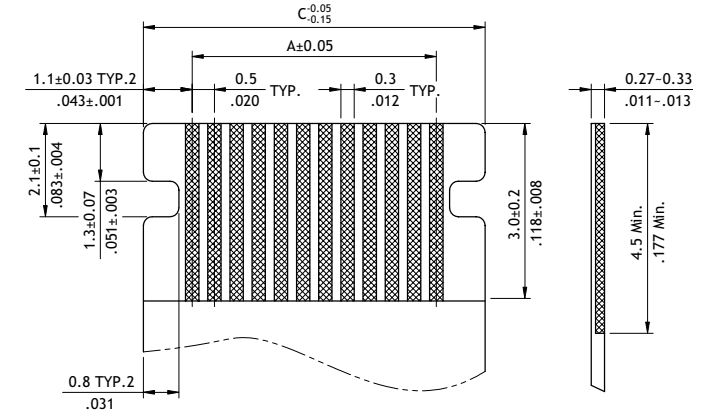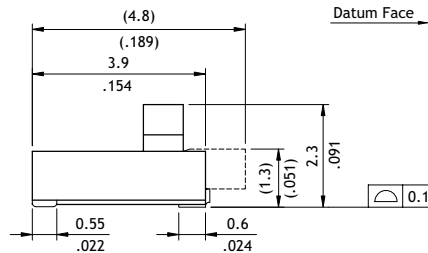

Recommended FPC Dimension

Ordering Code

① **CF 4 1** **②** **1 5** **③** **2** **④** **H** **⑤** **0** **⑥** **R** **⑦** **0** **⑧** **- NH**

① Series No.**②** No. of Circuits: 04 to 30
(Available: 6,8,12,15)*Circuits not found above
please consult manufacturer***③** Plating Code:

2 = Gold flash over Nickel

④ Contact Style:

H = Dual Side

⑤ Color: 0 = Nature**⑥** Packing Options:

R = Tape & Reel

⑦ Other Options:

0 = Standard

*Special option consult manufacturer

⑧ -NH = For Lead Free IR process and
Halogen-Free