


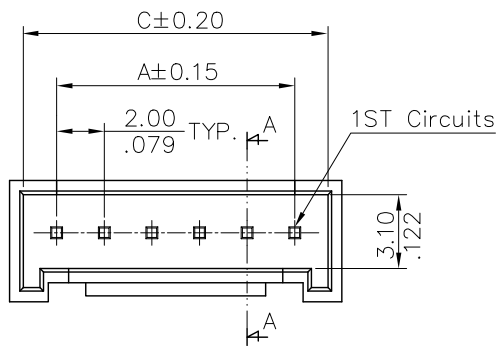

Note:

1. Material:

* Base:

High Temperature Polyamide

UL 94V-0 Color Nature

* Contact: Brass

△ 2. For Lead Free Wave flow Process

Ordering Code:

CI06 ** P 1 V 00 -LF
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② No. of circuits

③ Contact type: P= Pin Header

④ Plating option:

1= 3.05μm (120u") Tin over




0.76μm(30u") Nickel (Matte Tin Finish)

⑤ Type: V= Straight Type

⑥ Option: 00= Standard

⑦ Other option:

-LF= For Lead Free Wave flow Process

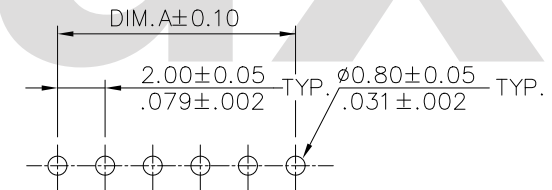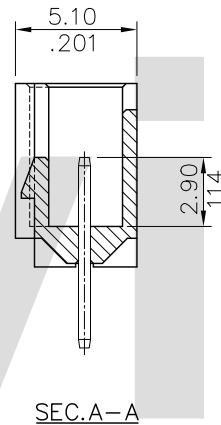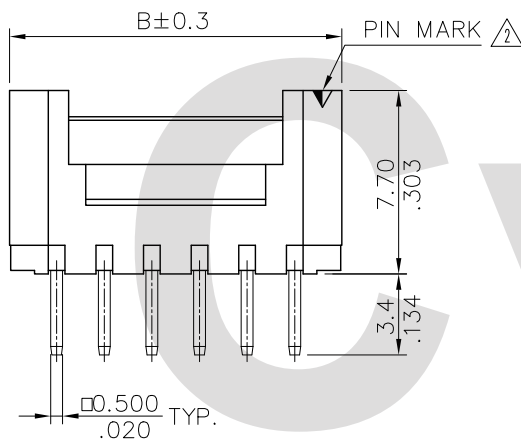

△ A = 2.0 x No. of Spaces

B = A + 3.96

C = A + 2.8

* Available in 2 through 16 circuits

Recommended P.C. Board Layout

Lead Free Process

RoHS Compliant

△ 4					DATE	UNIT: mm / inch	TITLE:	 瀚荃股份有限公司 CviLux Corporation			
△ 3	Enya	3/8-13'	ECN13056-0/ECR13007-1	DRAWN BY:	Enya	4/16-13'	2.00mm PIN HEADER DIP TYPE				
△ 2	Tim	11/09-10'	ECR10145-0/ECN10364	ENGINEER:	Eisley	4/19-13'	MATERIAL:	DRAWING NO.	CI0606SD	PART NO.	CI06**P1V00-LF
△ 1	Sandy	9/27-07'	ECN07402	CHECKED BY:	Eisley	4/19-13'	FINISH:	SCALE	3 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	4/19-13'					

CVILUX CORP

2013.04.24

ISSUED

TOLERANCE
UNLESS OTHERWISE SPECIFIED

.X ± 0.30/.012 X' ± 1'

.XX ± 0.20/.008

.XXX ± 0.10/.004 .XX' ±