


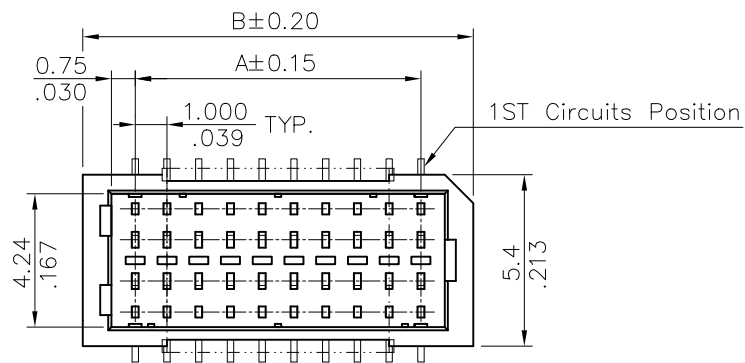

Material:

Base: Nylon 6T With 30% G.F UL 94V-0
,Color Nature

Contact: Phosphor Bronze

Tab: Brass


PAD: High Temperature plastic UL 94V-0
,Color Nature

Ordering Code:



CI11 ** M 2 V D 0 -R 0 -NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.
- ② No. of Circuits: 10,14,16,20,30,40,50
- ③ Contact type: M= SMT type header
- ④ Plating option:
2= Gold flash plated over 50μ" Nickel
- ⑤ Type: V= Straight
- ⑥ Row option:
D= Dual Row Type
- ⑦ Pegs option:
0= With Pegs (Standard)
1= Without Pegs
- ⑧ Packing option:
R= Tape & reel packing(Standard)
(With pick & place pad)
T= Tube packing
(without pack & place pad)
- ⑨ Color option: 0= Nature
- ⑩ -NH= For Lead Free IR Processes and Halogen-Free

4.0 (FOR 10 & 14 Pin)
7.0 (FOR 16~50 Pin)

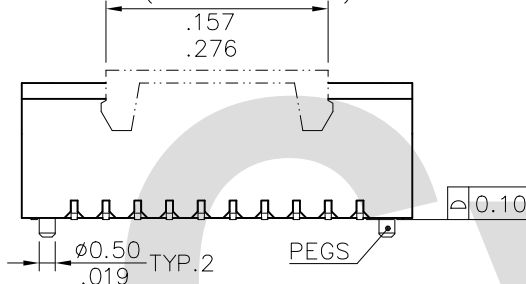

PICK & PLACE PAD

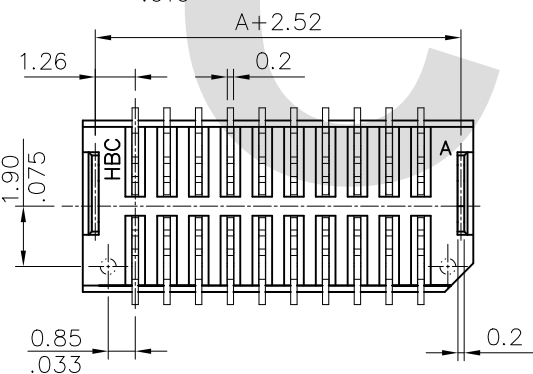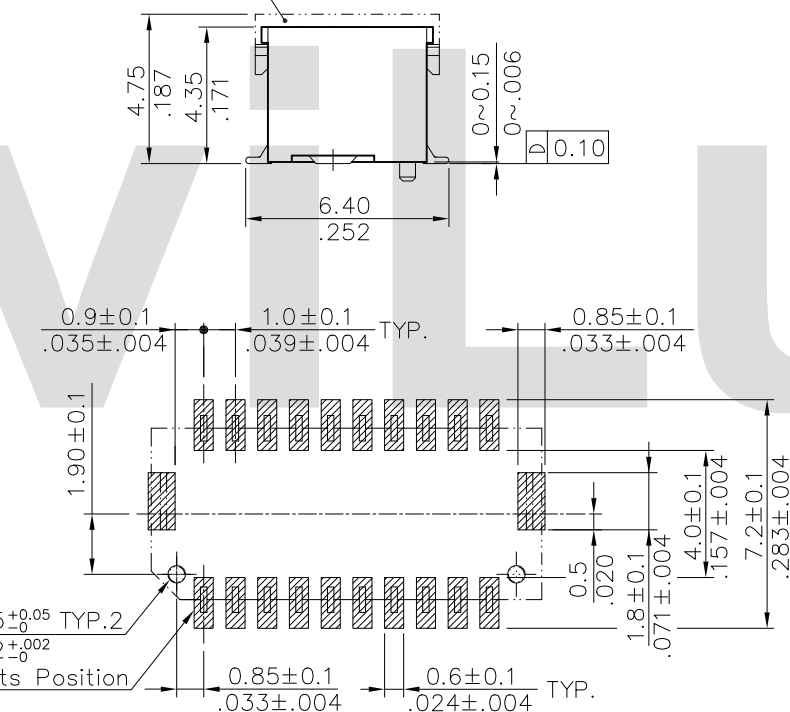

DIM. A = 1.00 x NO. OF SPACES
DIM. B = DIM. A + 3.3

1ST Circuits Position

Recommended P.C. Board Layout

* AVAILABLE IN 10,14,16,20,30,40,50, CIRCUITS

Halogen-Free

Lead Free Process

RoHS compliant

④	Ellie	4/27-15'	ECNT115086	CVILUX CORP 2015.04.30 ISSUED		DATE	UNIT: mm / inch	TITLE: 1.00MM(.079")	瀚荃股份有限公司 CviLux Corporation
③	Ellie	12/19-14'	ECNT114252/ECRT114090		DRAWN BY: Karen	4/27-15'	TOLERANCE UNLESS OTHERWISE SPECIFIED .X ± 0.30/.012 .X' ± 1" .XX ± 0.20/.008 .X" ± .XXX ± 0.10/.004 .XX' ±	WIRE TO BOARD CONNECTOR	
②	Karen	10/09-13'	ECNT113072		ENGINEER: Sun	4/28-15'		MATERIAL:	
①	Sun	7/05-11'	ECR10039-2/ECN11060		CHECKED BY: Eisley	4/29-15'		FINISH:	
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	4/29-15'			
		DRAWING NO.	CI1133SE	PART NO.		CI11**M2VD0-R*-NH			
		SCALE	4 / 1	SHEET		1 OF 2			

