
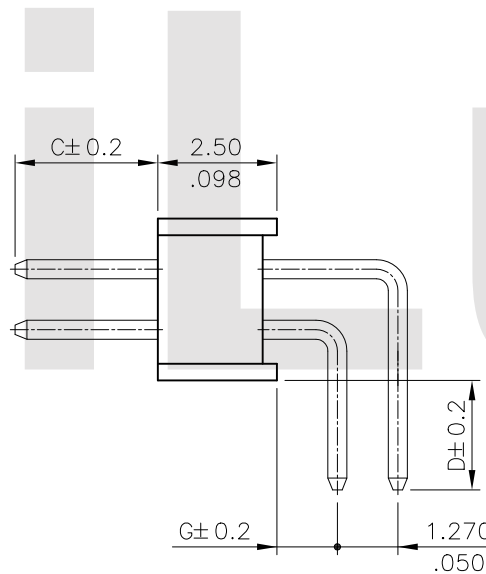


Recommended P.C. Boarded Layout

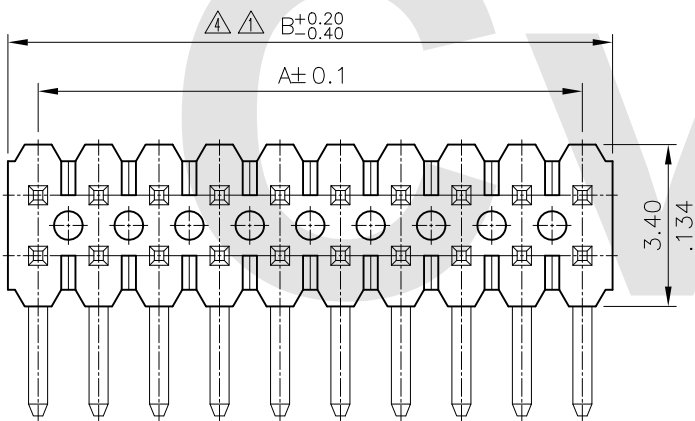

DIM. A = 1.27 X No. of Spaces
 DIM. B = DIM. A + 1.27
 * Available in 6 through 60 Circuits

Notes:

* Material:

Insulator: Nylon With 30% GF.
 UL 94V-0 Color Black
 Square Pin: Brass

△ * Pin overall Length 20.0mm Max.

Ordering Code:

CH52 ** * H 1 **
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- △ ② No. of Contact: 06 to 60
- ③ Plating code:
 2=Gold Flash plated over 1.27μm(50μ") Nickel
 3=0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
 4=0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ④ Tail & Mounting Style:
 H=Right Angle DIP Type
- ⑤ Insulator Material & Color:
 1=Nylon 6T , Color Black
- ⑥ Option Code:
 See Table PDF. File No. CH5202T

Lead Free Process

RoHS Compliant

| | | | | | | | | | |
|-----|-------|-----------|-----------------------|--|---------------------|-----------------|--|---|-----------|
| △ 4 | Ken | 4/10-17' | ECNT117071/ECRB117010 | | DATE | UNIT: mm / inch | TITLE: 1.27mm(.050") RIGHT ANGLE DUAL ROW BOARD MOUNT PIN HEADER | 瀚荃股份有限公司 CviLux Corporation | |
| △ 3 | Sun | 10/15-08' | ECN08479/ECR08119-1 | | DRAWN BY: Ken | 4/28-17' | TOLERANCE UNLESS OTHERWISE SPECIFIED | | MATERIAL: |
| △ 2 | Sandy | 3/20/08' | ECN08141/ECR08030-1 | | ENGINEER: Sun | 5/02-17' | .X ± 0.25/.010 X: ± 1" | | FINISH: |
| △ 1 | Sandy | 08/27/04' | ECN04327 | | CHECKED BY: Eisley | 5/03-17' | .XX ± 0.15/.006 .X: ± | DRAWING NO. CH5202SD PART NO. CH52***H1** | |
| SYM | NAME | DATE | REVISIONS | | APPROVED BY: Eisley | 5/03-17' | .XXX ± 0.08/.003 .XX: ± | SCALE 6 / 1 SHEET 1 OF 1 | |