


REV B	DRC16-40SE	REVISIONS			
		SYM	DESCRIPTION	DATE	APPROVED
		NC	NEW RELEASE PER E.O. PI5324	9-5-97	RDR
		A	REVISED PER E.O. PI6772	7-24-00	RDR
		B	REVISED PER E.O. PI7729	4-15-02	RDR

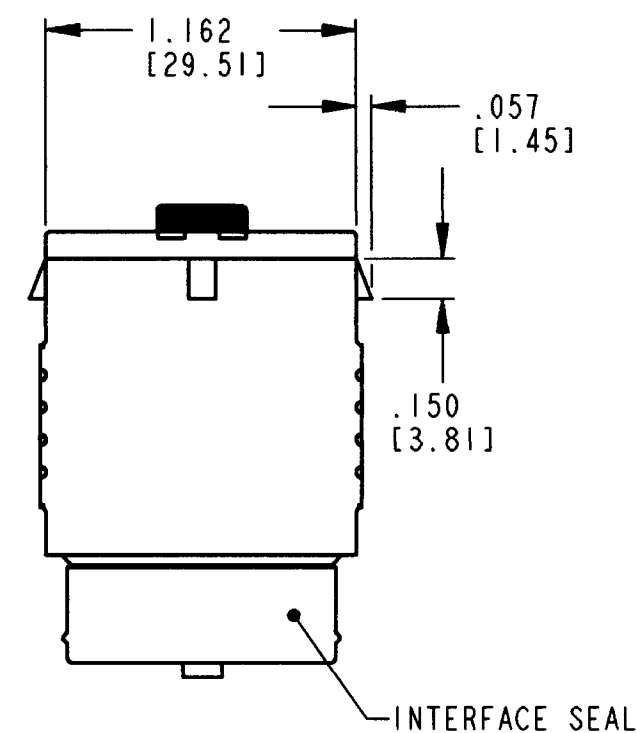

8. MATERIAL- PLUG: PLASTIC (BLACK); SEAL/GROMMET: RUBBER; BOLT/CLIP: STEEL.

7. MATING TORQUE REQUIREMENT: 25-28 IN-LB [2.82-3.16 Nm].

6. WHEN *=E: BLUE STRIP IDENTIFIES "E" SEAL.

5. THIS PLUG MATES WITH DRC10-40P-****; DRC12-40P*E-****; DRC13-40P*-****; DRC14-40P*E-****. CONSULT FACTORY FOR MODIFICATIONS.
* = A, B, C, D KEYS
**** = MODIFICATIONS

4. FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS, SEE ENVELOPE DRAWING 0425-015-0000.

3. PLUG SUPPLIED WITH DUST CAP. (NOT SHOWN).

2. DIMENSION TOLERANCE: $\pm .025$ [.635].

1. DIMENSIONS ARE IN INCHES [mm].

NOTES:

CONTACT SIZE	MIN. INSUL. OD [mm]	MAX. INSUL. OD [mm]	WIRE RANGE [mm ²] REF ONLY
16	.053 [1.35]	.120 [3.05]	14-18 AWG [2.0-.75]

SIGNATURE & DATE		CP	
DR	J. APOSTOL 18 JUL 2000	The Deutsch Company DEUTSCH I.P.D. 3850 INDUSTRIAL AVE. HEMET, CALIF. 92545	
CHK	B. B. 4/15/02		
PE	D. Meyer 4/15/02		
APPD	P. Reed 4-15-02		
SCALE	NONE	WT	
DRC CONNECTOR PLUG 40 CONTACTS REDUCED "E" WIRE SEAL		B DRC16-40SE	
		DWG SIZE 11139	SHEET 1 OF 1

ENVELOPE