
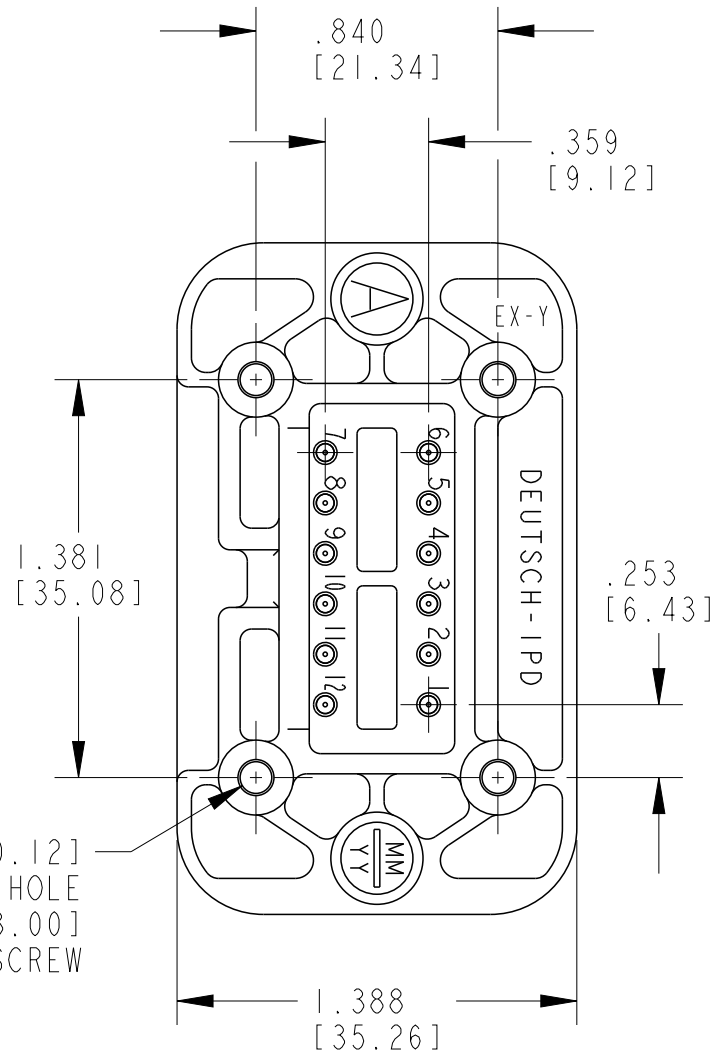
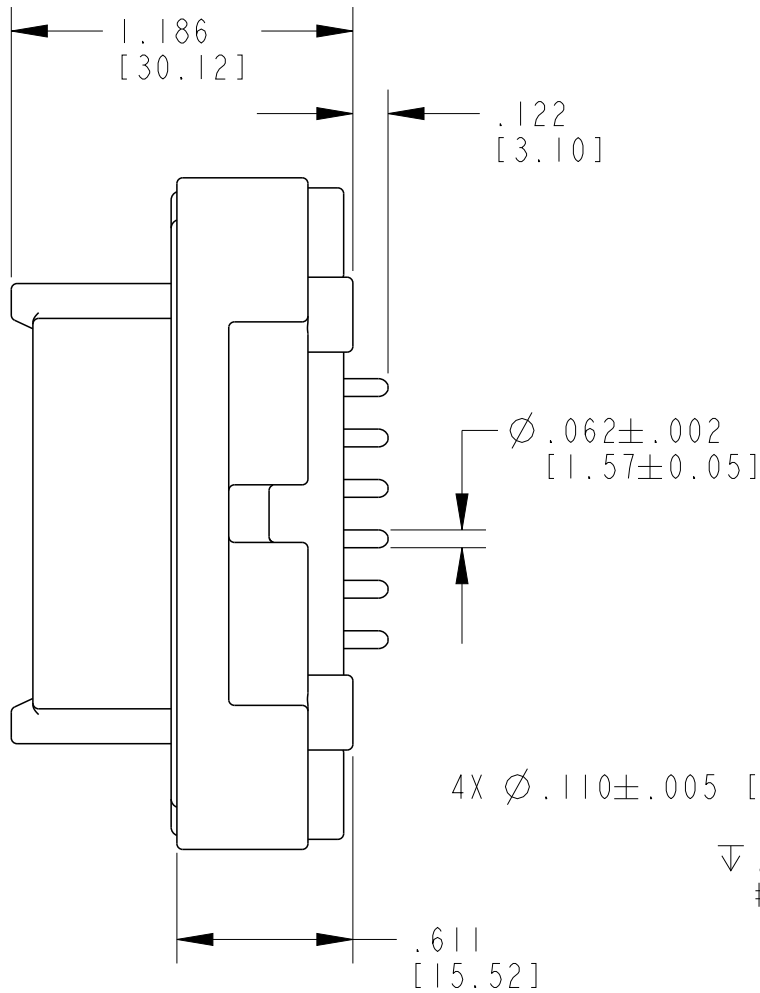
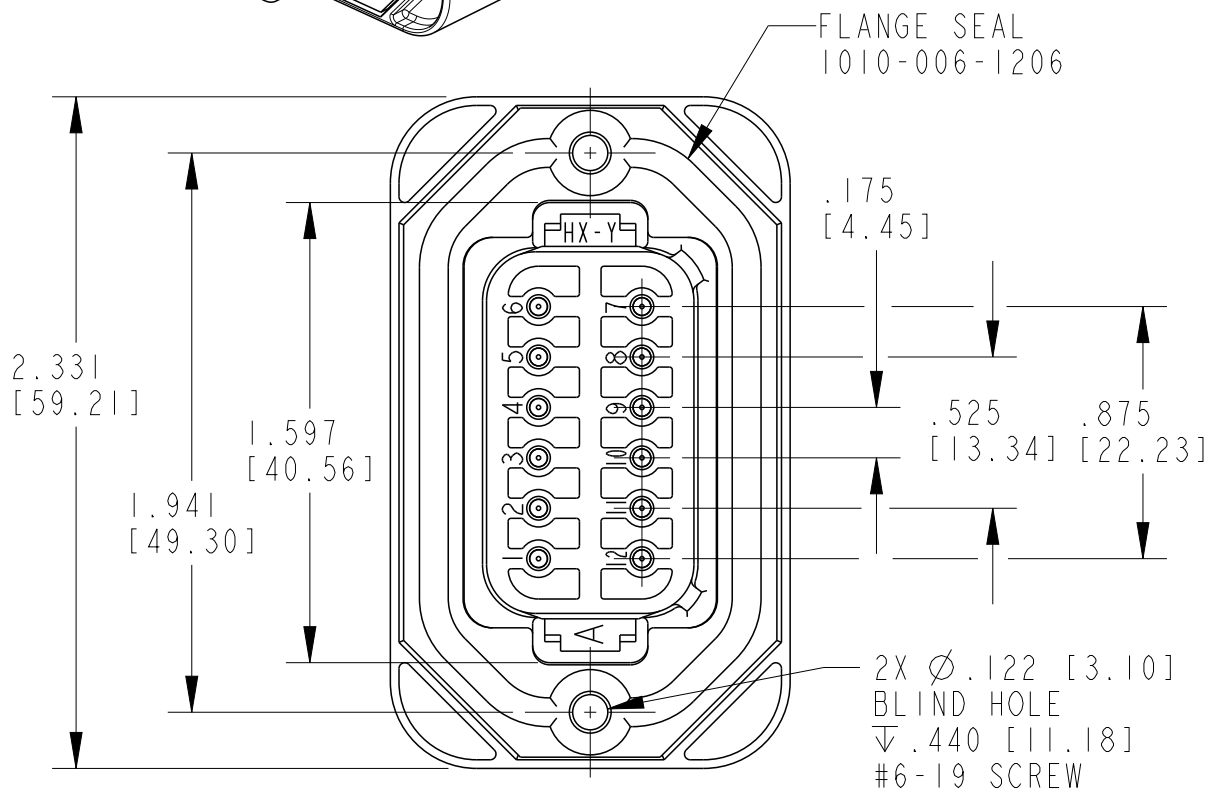


2		1					
LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	REVISED PER E.O. P18200	6-16-03		RDR
			B	REVISED PER E.O. P19171	6-13-06		RDR
			C	REVISED PER E.O. P21065	8-26-11		RDR
			CI	REVISED PER ECO-14-010107	03JUL2014	JA	DM

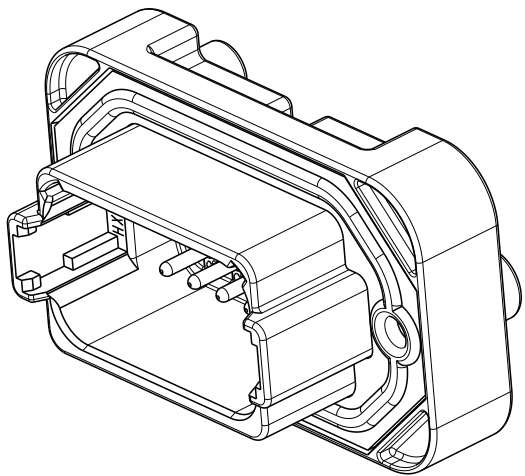











6. MOUNTING SCREW TORQUE VALUES ARE AS FOLLOWS:
#6-19 SCREWS: 13±2.0 IN-LB [1.47±.23 N-M].
#4-20 SCREWS: 8±2.0 IN-LB [.90±.23 N-M].
VALUES VALID FOR PLASTITE 48 SCREWS ONLY.
5. RECOMMENDED MOUNTING SCREWS (NOT INCLUDED): CAMCAR PLASTITE 48, SINGLE HELIX.
4. THIS RECEPTACLE MATES WITH DT06-12SX-XXXX PLUG (X = A,B,C,D KEYS, XXXX = ALL MODIFICATIONS).
3. CONTACT PLATING - MATING SIDE: NICKEL; PCB SIDE: TIN

- 2 MATERIALS:
SHELL: PA GF30
SEAL: SILICONE (ORANGE-RED)
PIN CONTACTS: COPPER ALLOY
- 1 DIMENSION TOLERANCE: ±.025 [.64]
PANEL CUTOUT: ±.010 [.25]
PIN LOCATIONS: ±.005 [.13]
MOUNTING HOLE LOCATIONS: ±.010 [.13]

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. BURKE 08JUN2001	TE Connectivity		
DIMENSIONS: INCHES[mm]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK KEVIN MCKEE 03JUL2014			
		APVD DAVID MEYER 03JUL2014			
		PRODUCT SPEC			
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±0°30'0"	APPLICATION SPEC	NAME RECEPTACLE HEADER 12 PIN 180 DEG DT SERIES		
		WEIGHT	SIZE A3	CAGE CODE 4AFU8	DRAWING NO C-DT15-12PX
MATERIAL 2	FINISH	CUSTOMER DRAWING	SCALE 3:2	SHEET 1	OF 2
			REV CI		

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			C I	SEE SHEET I	03JUL2014	JA	DM

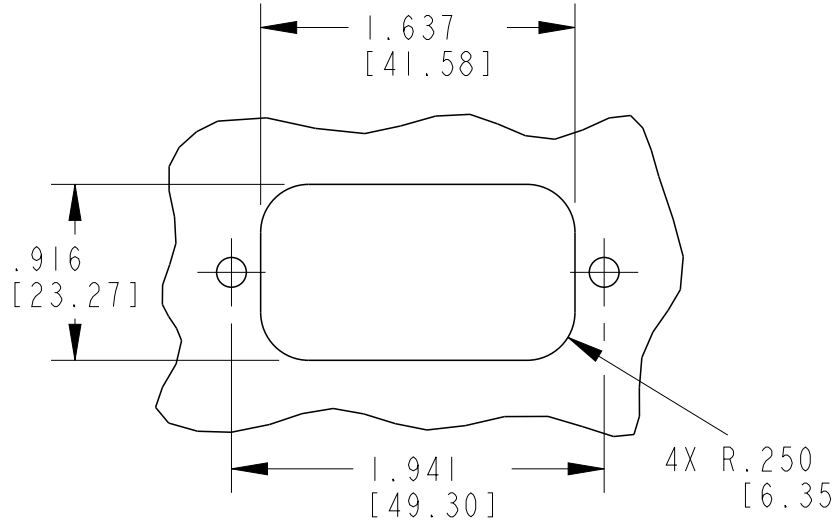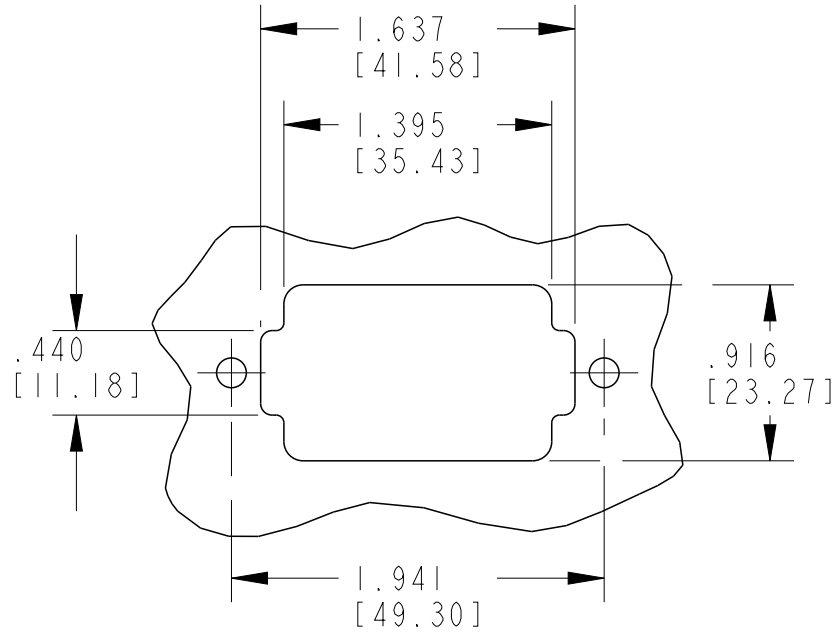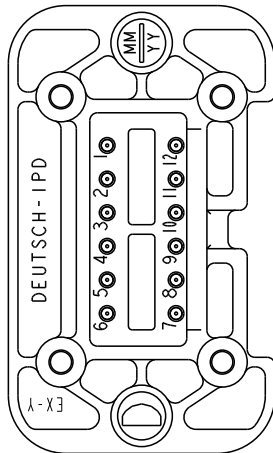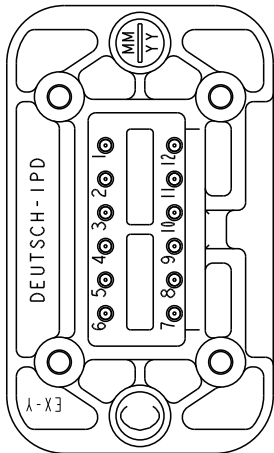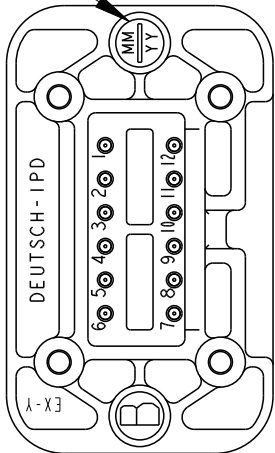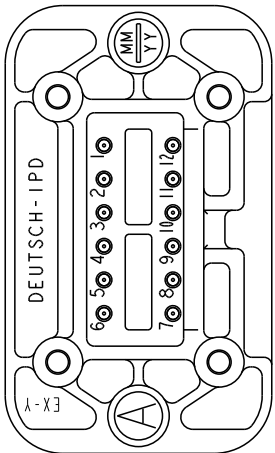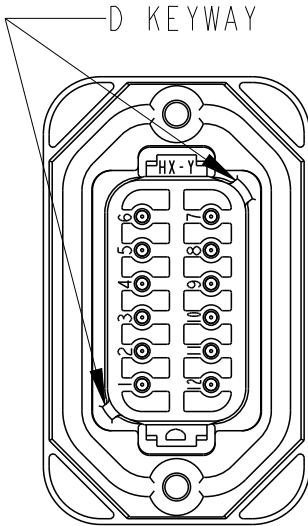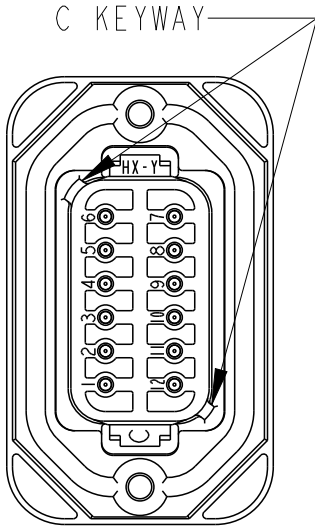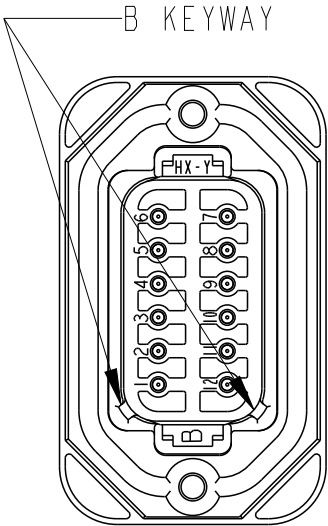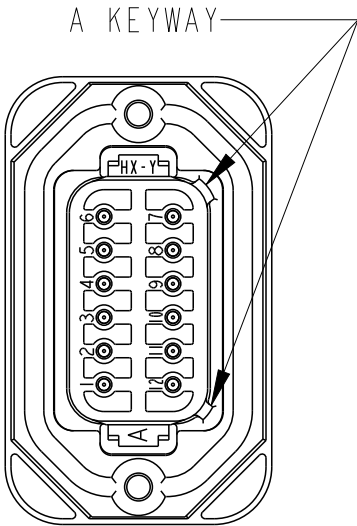





RECOMMENDED PANEL CUTOUTS

DT15-12PA
COLOR GREY

DT15-12PB
COLOR BLACK

DT15-12PC
COLOR GREEN

DT15-12PD
COLOR BROWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. BURKE 08JUN2001	 TE Connectivity			
DIMENSIONS: INCHES [mm]		CHK KEVIN MCKEE 03JUL2014				
		APVD DAVID MEYER 03JUL2014	NAME RECEPTACLE HEADER 12 PIN 180 DEG DT SERIES			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	SIZE A3			
		APPLICATION SPEC	CAGE CODE 4AFU8			
MATERIAL 		WEIGHT	DRAWING NO C-DT15-12PX			
FINISH 2		CUSTOMER DRAWING	RESTRICTED TO			
		SCALE 1:1	SHEET 2 OF 2			
			REV C1			